



Heat Shrink Tubing > HFT5000 Heat Shrink Tubing



Primary Product Color: **Black**

Wall Material Type: **Fiber & Fabric**

Expanded Inside Diameter (Min): **34 mm [1.339 in]**

Recovered Inside Diameter (Max): **17 mm [.669 in]**

Shrink Ratio: **2:1**

[All HFT5000 Heat Shrink Tubing \(128\)](#)

Features

Product Type Features

Wall Material Type	Fiber & Fabric
--------------------	----------------

Body Features

Fluid Type	Antifreeze, Battery Acid, Brake Fluid, Car Wash Detergent, Diesel Fuel, Hydraulic Fluid, Lubricating Oil, Unleaded Gasoline
Primary Product Color	Black
Shrink Ratio	2:1
Primary Product Material	Polyethylene/Polyester
Flexibility	Very Flexible

Dimensions

Expanded Inside Diameter (Min)	34 mm[1.339 in]
Recovered Inside Diameter (Max)	17 mm[.669 in]
Tubing Size Range	17 – 34 mm[.669 – 1.339 in]

Usage Conditions

Shrink Temperature (Min)	80 °C
Tubing Flammability Type	Non-Flame-Retardant



Operating Temperature Range	-40 – 125 °C
-----------------------------	--------------

Recovery Temperature	110 °C
----------------------	--------

Operation/Application

Mechanical Resistance	Abrasion, Cut-Through, Mechanical Damage
-----------------------	--

Product Availability

Applicable Region	Global
-------------------	--------

Packaging Features

Packaging Method	Reel
------------------	------

Other

Product Source	Czech Republic
----------------	----------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
--	---

Halogen Content	Out of Scope - excluded from Halogen requirements
-----------------	---

Solder Process Capability	Not applicable for solder process capability
---------------------------	--

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # EG1114-000
CV1981-ST-230V1600W-EU

Also in the Series | RAYCHEM HFT5000

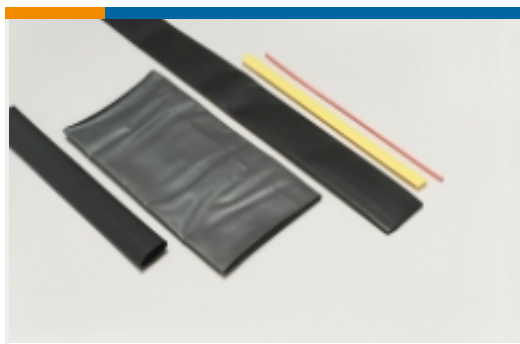

Heat Shrink Tubing(128)


Customers Also Bought



TE Part #7480624003
HFT5000 Heat Shrink Tubing



TE Part #185226-2
Signal Header

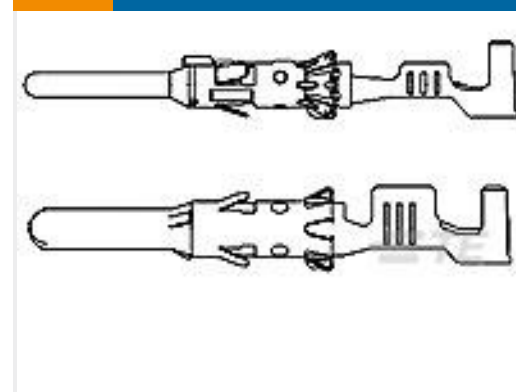

TE Part #1703013-1
DIA 1.5MM CONTACT PIN,ASSY



TE Part #3-1419158-0
GET .64 CONNECTOR SYSTEM,
CONNECTOR HSG



TE Part #NB07394001
HTAT-12/3-0-SP

Documents

Product Drawings

[HFT5000-34/17-0-SP](#)

English

Datasheets & Catalog Pages

[Measuring_Single_Wall_Tubing](#)

English



[HFT5000 Pages from 9-1773447-9](#)

English

[Selecting_Correct_Tubing_1216](#)

English

[Product Specifications](#)

[Quality Specification](#)

English

[Agency Approvals](#)

[UL](#)

English