

| | |
|---------------------|--|
| Product description | M8 female cable connector, Contacts: 3, 3.5 - 5.5 mm, shieldable, solder, IP67, UL listed |
| Area | M8 series 768 |
| Order number | 99 3360 00 03 |

| Illustration | Scale drawing | Contact arrangement | | | | | | | | | | | | | | | |
|--------------|---------------|--|--|---|---|---|------|------|---|---|---|---|-------|------|---|------|------|
| | | <table border="1" style="margin-left: 20px;"> <thead> <tr> <th></th> <th>X</th> <th>Y</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1,75</td> <td>0,00</td> </tr> <tr> <td>2</td> <td>-</td> <td>-</td> </tr> <tr> <td>3</td> <td>-1,75</td> <td>0,00</td> </tr> <tr> <td>4</td> <td>0,00</td> <td>1,75</td> </tr> </tbody> </table> | | X | Y | 1 | 1,75 | 0,00 | 2 | - | - | 3 | -1,75 | 0,00 | 4 | 0,00 | 1,75 |
| | X | Y | | | | | | | | | | | | | | | |
| 1 | 1,75 | 0,00 | | | | | | | | | | | | | | | |
| 2 | - | - | | | | | | | | | | | | | | | |
| 3 | -1,75 | 0,00 | | | | | | | | | | | | | | | |
| 4 | 0,00 | 1,75 | | | | | | | | | | | | | | | |

You can find the component part drawing and assembly instructions on the next page.

Technical data

General values

| | |
|--------------------------|------------------------|
| Connector design | female cable connector |
| Connector locking system | screw |
| Termination | solder |
| Wire gauge (mm) | 0.25 mm ² |
| Wire gauge (AWG) | 24 |
| Cable outlet | 3.5 - 5.5 mm |
| Upper limit temperature | 85 °C |
| Lower limit temperature | -40 °C |
| Customs tariff number | 85369010 |

Electrical values

| | |
|---------------------------|---------------------|
| Rated current (40 °C) | 4 A |
| Rated voltage | 60 V |
| Rated impulse voltage | 1500 V |
| Pollution degree | 3 |
| Overvoltage category | III |
| Insulating material group | III |
| EMC compliance | shieldable |
| Degree of protection | IP67 |
| Mechanical operation | > 100 Mating cycles |

Cable data


| | |
|------------|-----------|
| Approval 1 | UL listed |
|------------|-----------|

Material


| | |
|-----------------------|---------------|
| Contact material | CuSn (bronze) |
| Contact plating | Au (gold) |
| Contact body material | PA |

Product description **M8 female cable connector, Contacts: 3, 3.5 - 5.5 mm, shieldable, solder, IP67, UL listed**
 Area **M8 series 768**
 Order number **99 3360 00 03**

Component part drawing

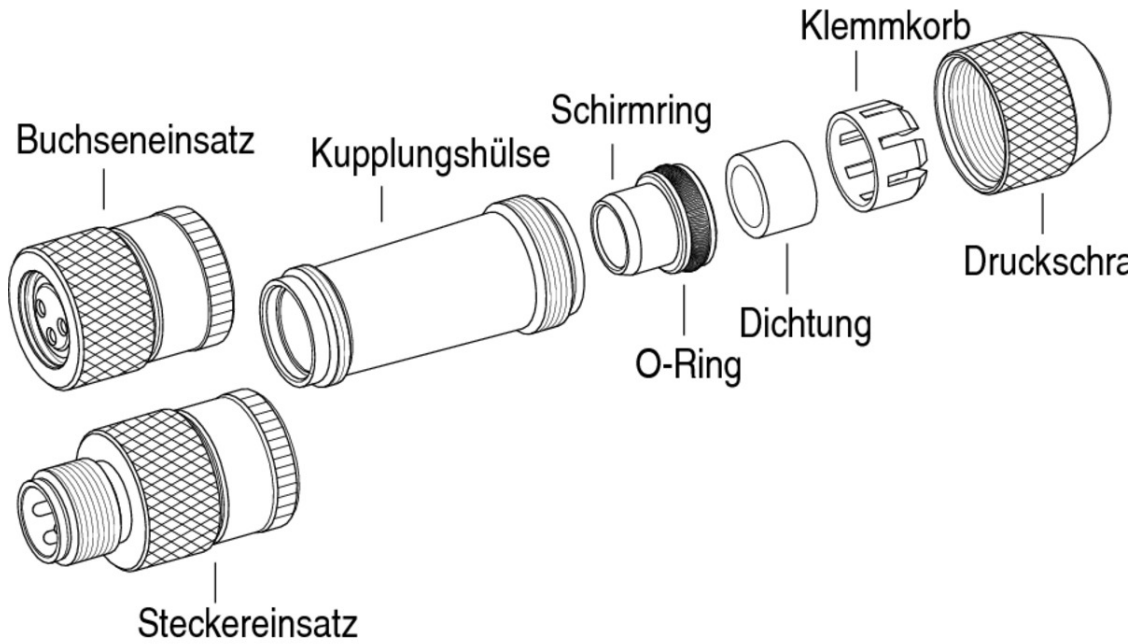

Assembly instructions / Panel cut-out

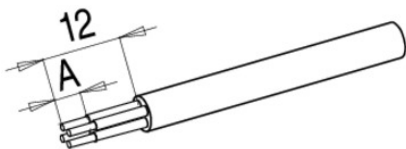

| | Schraubklemmversion | Lotversion |
|----------|---------------------|------------|
| Maß A/mm | 4 | 3 |

| | |
|---------------------|--|
| Product description | M8 female cable connector, Contacts: 3, 3.5 - 5.5 mm, shieldable, solder, IP67, UL listed |
| Area | M8 series 768 |
| Order number | 99 3360 00 03 |

Security notices

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.

To lock the cable connector to the equipment connector, the threaded ring is tightened until it is 'finger-tight' (approx. 50 cNm).