

Product data sheet

Automation technology - data transmission



Product description **M12-X Female panel mount connector, Contacts: 8, shieldable, THT, IP67, UL, M12x1.0**


Area **M12-X series 876**

Part no. **99 3782 213 08**

Illustration




Conductor layout




View of mating side
 Thickness of PCB: 1,6 mm
 All holes fully contacted
 (except Ø 2,8).
 Cu 35/35

Scale drawing

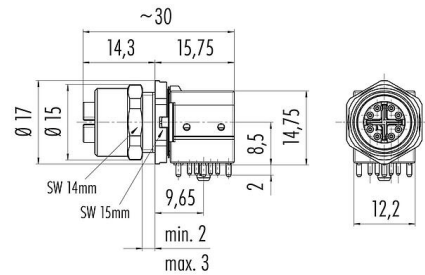

Contact arrangement (Plug-in side)

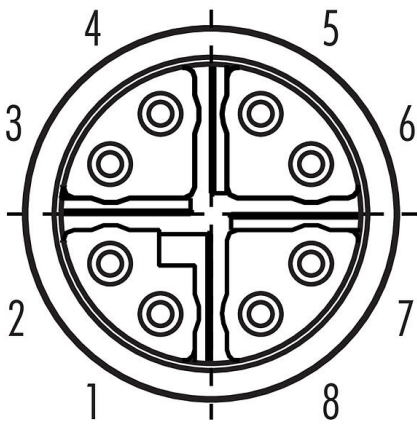

You can find the assembly instructions on the next page.

Technical data

General features

Part no.	99 3782 213 08
Connector design	Female panel mount connector
Version	Connector socket angled
Connector locking system	screw
Termination	THT
Degree of protection	IP67
Temperature range from/to	-40 °C / 85 °C
Mechanical operation	> 100 Mating cycles



Product data sheet

Automation technology - data transmission



Product description	M12-X Female panel mount connector, Contacts: 8, shieldable, THT, IP67, UL, M12x1.0
Area	M12-X series 876
Part no.	99 3782 213 08

Weight (g)	14.21
Customs tariff number	85369010

Electrical parameters

Rated voltage	50 V (AC) / 60 V (DC)
Rated current (40 °C)	0.5 A
Insulation resistance	> 10 ⁸ Ω
Pollution degree	3
Transmission rate	CAT 6A
Overvoltage category	II
Insulating material group	III
EMC compliance	shieldable
Shield connection	Shield pin

Material

Housing material	Zinc die-cast nickel-plated
Contact body material	PA
Contact material	CuSn (bronze)
Contact plating	Au (gold)
Locking material	CuZn (brass)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	96ab9d45-e05a-491c-b72f-e984cdc2a8dd

Authorization/approvals

Approvals	UL
-----------	----


Classifications

eCl@ss 11.1	27-44-01-02
ETIM 7.0	EC002635


Product description **M12-X Female panel mount connector, Contacts: 8, shieldable, THT, IP67, UL, M12x1.0**
Area **M12-X series 876**
Part no. **99 3782 213 08**

Assembly instructions / Panel cut-out

With flats as anti-rotation device

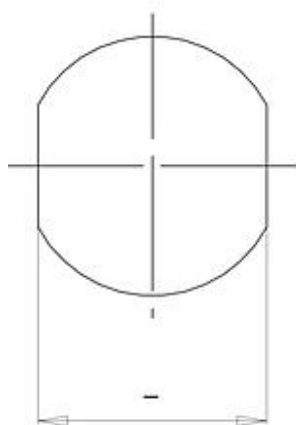

With bore hole

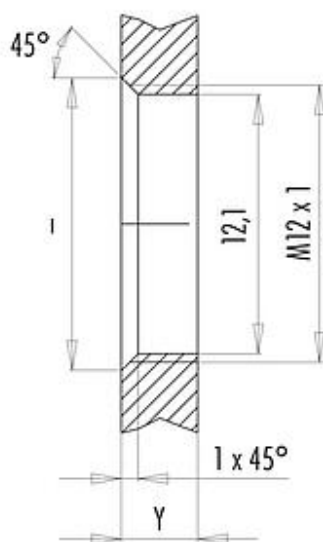

Installation direction: o-ring sits on chamfer.

Tightening moment

Metall housing 1,00 Nm

Thickness of wall Y (mm)		
Version	min (mm)	max (mm)
Fastened from rear	2	3,5
Front fastened	2	4,5
positioning possible ¹⁾	2	3,5
Screw clamp	2	3,5
Thread M12 x 1	2	3,0
Thread M14 x 1 ²⁾	³⁾ 1,5/ ⁴⁾ 2	6,5

Notes

- ¹⁾ Do not attach a chamfer
- ²⁾ Wall thickness:
use nut 38 5385 100 001 up to 1,5 mm,
>1,5 mm cut thread
- ³⁾ Nut
- ⁴⁾ Thread in wall of housing

Product description	M12-X Female panel mount connector, Contacts: 8, shieldable, THT, IP67, UL, M12x1.0
Area	M12-X series 876
Part no.	99 3782 213 08

General Disclaim Notice

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.