


KEMET Part Number: PEH200UU4470MU2
(A351SP472M350A)

PEH200, Aluminum Electrolytic, 4,700 uF, 20%, 350 VDC, -40/+85°C

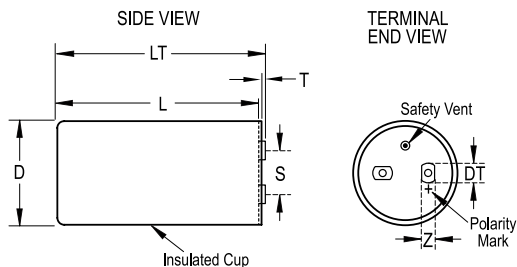

General Information

Series:	PEH200
Dielectric:	Aluminum Electrolytic
Description:	Screw Terminal, Aluminum Electrolytic
RoHS:	Yes
AEC-Q200:	No
Halogen Free:	Yes
Notes:	Dimensions D And L Include Sleevings. MS (MxS) = M12x16.
Shelf Life:	156 Weeks

Dimensions

D	76.6mm +/-1mm
L	118mm +/-1mm
T	3.8mm NOM
S	32mm +/-0.5mm
F	15mm +/-0.5mm
DT	15mm NOM
G	13mm NOM
LT	125mm +/-1mm
Z	13mm NOM

Specifications

Capacitance:	4,700 uF
Capacitance Tolerance:	20%
Voltage DC:	350 VDC
Temperature Range:	-40/+85°C
Rated Temperature:	85°C
Life:	19000 Hrs (Rated Voltage And Ripple Current At 85C)
Resistance:	20 mOhms (100Hz 20C), 11 mOhms (100kHz 20C)
Ripple Current:	14.5 Amps (100Hz 85C), 54.7 Amps (10kHz 50C), 39.5 Amps (10kHz 40C)
Leakage Current:	8935 uA (5min 20°C)
Inductance:	17 nH (ESL)

Packaging Specifications

Weight:	640 g
Sleevings:	Yes
Packaging:	Bulk, Bag
Packaging Quantity:	9