

ABE7R16T111

sub-base - soldered electromechanical relays
ABE7 - 16 channels - relay 5 mm



Main

Range of product	Advantys Telefast ABE7
Product or component type	Sub-base with plug-in electromechanical relay type
Sub-base type	Output sub-base
[Us] rated supply voltage	19...30 V conforming to IEC 61131-2
Number of channels	16
Connections - terminals	Screw type terminals, clamping capacity: 2 x 0.14...2 x 1.5 mm ² AWG 26...16 solid Screw type terminals, clamping capacity: 2 x 0.14...2 x 0.75 mm ² AWG 26...18 flexible with cable end Screw type terminals, clamping capacity: 1 x 0.14...1 x 4 mm ² AWG 26...12 solid Screw type terminals, clamping capacity: 1 x 0.14...1 x 2.5 mm ² AWG 26...14 flexible without cable end Screw type terminals, clamping capacity: 1 x 0.14...1 x 1.5 mm ² AWG 26...16 flexible with cable end

Complementary


Supply voltage type	DC
Product compatibility	ABR7S11
Contacts type and composition	1 NO
Status LED	1 LED per channel for channel status 1 LED for power ON
Polarity distribution	Common distribution group of 4
Short circuit protection	1 A internal fuse, 5 x 20 mm, fast blow (PLC end)
Mounting mode	By screws on surface mount with kit By clips on 35 mm DIN rail
Supply current	<= 1 A
Voltage drop on power supply fuse	0.3 V
Current per output common	<= 5 A screw type terminals
[Ui] rated insulation voltage	300 V between coil circuit/contact circuits conforming to IEC 60947-1 2000 V between terminals/mounting rails
Current per module	<= 12 A
[Uimp] rated impulse withstand voltage	2.5 kV
Installation category	II conforming to IEC 60664-1
Tightening torque	0.6 N.m (with flat Ø 3.5 mm)
Product weight	0.6 kg

Environment


Product certifications	BV CSA DNV GL LROS (Lloyds register of shipping) UL
IP degree of protection	IP2x conforming to IEC 60529
Resistance to incandescent wire	750 °C, extinction time: < 30 s conforming to IEC 60695-2-11
Shock resistance	15 gn for 11 ms conforming to IEC 60068-2-27
Vibration resistance	2 gn (f = 10...150 Hz) conforming to IEC 60068-2-6
Resistance to electrostatic discharge	8 kV (air) conforming to IEC 61000-4-2 level 3 4 kV (contact) conforming to IEC 61000-4-2 level 3
Resistance to radiated fields	10 V/m (26000000...1000000000 Hz) conforming to IEC 61000-4-3 level 3

Resistance to fast transients	2 kV conforming to IEC 61000-4-4 level 3
Ambient air temperature for operation	-5...60 °C conforming to IEC 61131-2
Ambient air temperature for storage	-40...80 °C conforming to IEC 61131-2
Pollution degree	2 conforming to IEC 60664-1


Dimensions

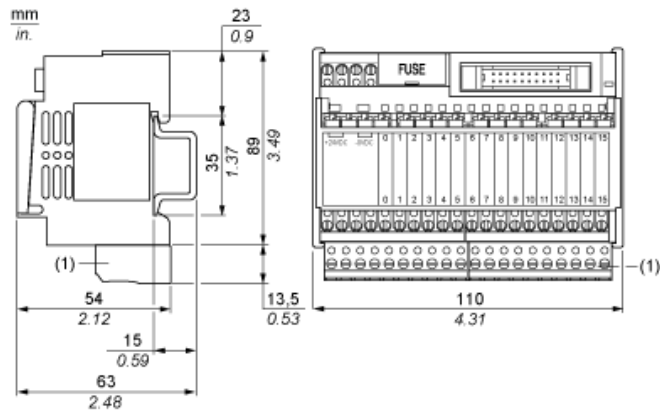


Mounting

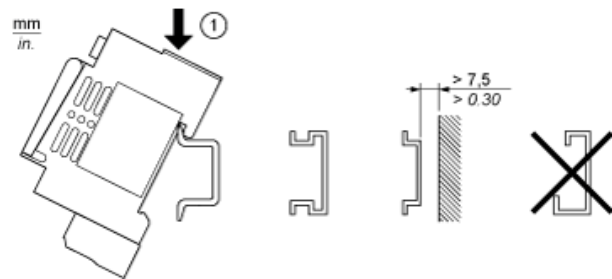

HE10 16 Channels

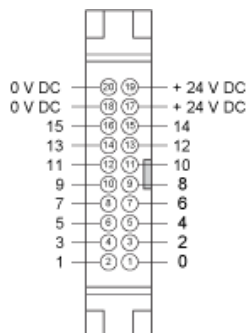


Wiring Diagram

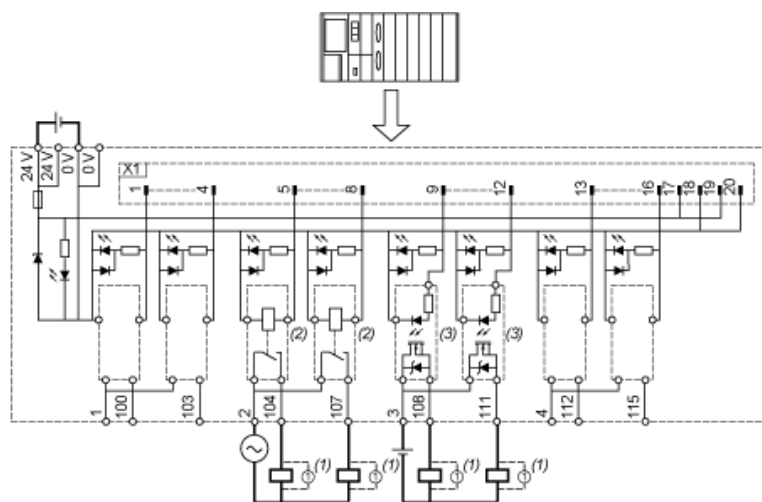

- (1) Inductive load
- (2) ABR7S11 (1F) - N/O Ith = 6 A (supplied for ABE7R16T111 and not supplied for ABE7P16T111)
- (3) ABS7SC1B 24 V DC Imax. = 2 A (not supplied)

Curves for Determining Cable Type and Length According to the Current

16-channel Sub-base

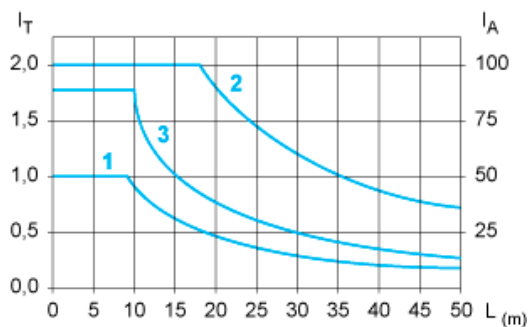


- L Cable length
 I_T Total current per sub base (A)
 I_A Average current per channel (mA)
 (1) TSXCDP••2 and ABFH20H••0 cables with c.s.a. 0.08 mm^2 (AWG 28).
 (2) TSXCDP••3 cables with c.s.a. 0.34 mm^2 (AWG 22).
 (3) Cables with c.s.a. 0.13 mm^2 (AWG 26).

The curves are given for a voltage drop of 1 V in the cable. For n volts tolerance, multiply the length determined from the graph by n.

Electrical Durability (in Millions of Operating Cycles) Conforming to IEC 60947-5-1

DC Loads


DC12 curves

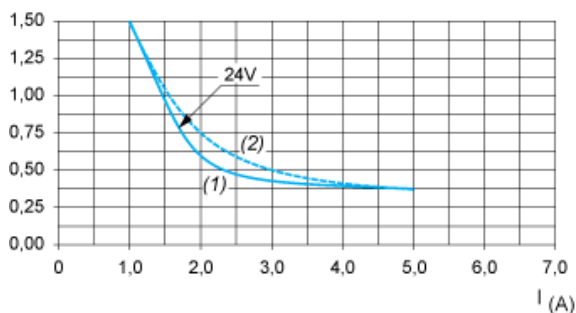

DC12control of resistive loads and of solid state loads isolated by optocoupler, $I/R \leq 1 \text{ ms}$.

- (1) Resistive loads
 (2) Inductive loads


DC13 curves

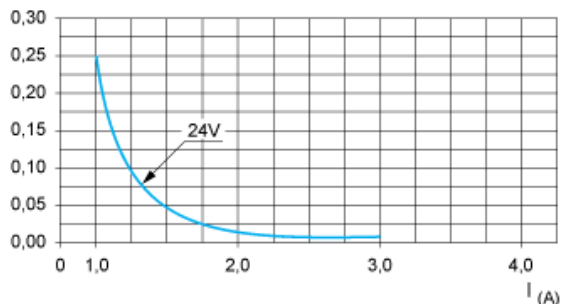

DC13switching electromagnets, $L/R \leq 2 \times (U_e \times I_e)$ in ms, U_e : rated operational voltage, I_e : rated operational current (with a protective diode on the load, DC12 curves must be used with a coefficient of 0.9 applied to the number in millions of operating cycles)


AC Loads

AC12 curves

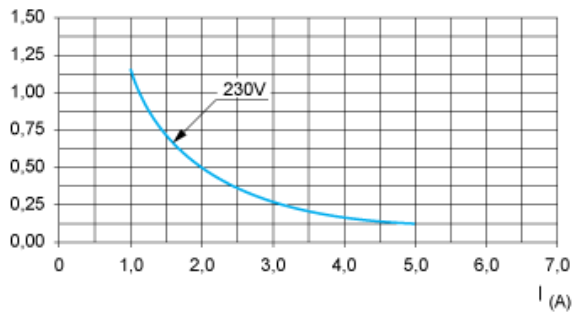

AC12 control of resistive loads and of solid state loads isolated by optocoupler, $\cos \phi \geq 0.9$.

AC15 curves

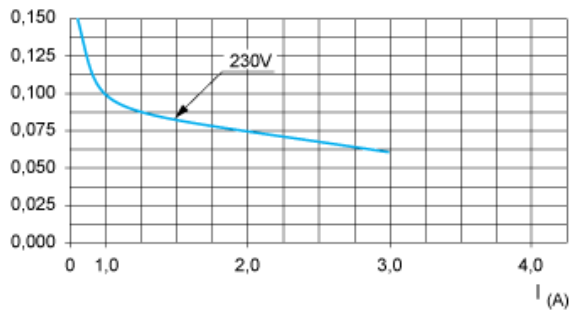

AC15 control of electromagnetic loads $> 72 \text{ VA}$, make: $\cos \phi = 0.7$, break: $\cos \phi = 0.4$.