

Product Data Sheet ACi 4420 HHU

ebm**papst**

Die Wahl der Ingenieure



ACi 4420 HHU

INDEX

1	General	3
2	Mechanics	3
2.1	General	3
2.2	Connections	4
3	Operating Data.....	5
3.1	Operating Data - Electrical Interface - Input	5
3.2	Electrical Operating Data	5
3.3	Operating Data - Electrical Interface - Output	5
3.4	Electrical Features	6
3.5	Aerodynamics	7
3.6	Sound Data	8
4	Environment.....	8
4.1	General	8
4.2	Climatic Requirements*)	8
5	Safety.....	9
5.1	Electrical Safety	9
5.2	Approval Tests	9
6	Reliability.....	9
6.1	General	9

1 General

Fan type	Fan
Rotating direction looking at rotor	Clockwise
Airflow direction	Air outlet over struts
Bearing system	Ball bearing
Mounting position	Any


2 Mechanics

2.1 General

Width	120,0 mm	
Height	120,0 mm	
Depth	38,0 mm	
Diameter	0,0 mm	
Mass	0,275 kg	
Housing material	Plastic	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges	wire outlet corner: 50 Ncm remaining corners: 80 Ncm	
Screw size	ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Cable	
Lead wire length	L = 310 mm	
Tolerance	+/- 20 mm	
Tube length	See drawing	
Tolerance		
Wire size (AWG)	18	
Insulation diameter		
Plug	See drawing	
Contact	See drawing	

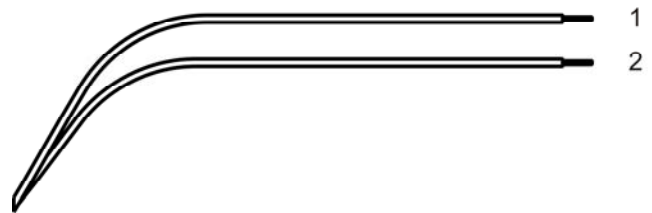

	Colour	Operation
Wire 1	blue	N
Wire 2	brown	L

3 Operating Data

3.1 Operating Data - Electrical Interface - Input

External voltage supply for input and output signals must be SELV conform.

3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$: corresp. to free air flow (see section 3.5)
I: corresp. to arithm. mean current value

Features	Condition	Symbol	Values			
Voltage range	$\Delta p = 0$	U				
Nominal voltage	$\Delta p = 0$	U_N		230 V		
Frequency	$\Delta p = 0$	f		50 Hz		
Power consumption Tolerance	$\Delta p = 0$	P		4,4 W +/- 20,0 %		
Speed Tolerance	$\Delta p = 0$	n		3.300 1/min +/- 10,0 %		

3.3 Operating Data - Electrical Interface - Output


External voltage supply for input and output signals must be SELV conform.

Tacho type	None
------------	------

Alarm type	None
------------	------

3.4 Electrical Features

Electronic function	Speed-Controlled	
Locked rotor protection	Auto restart	

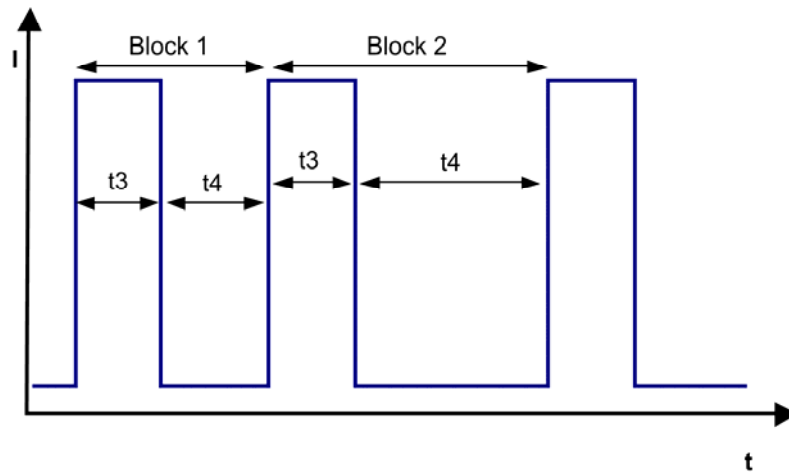

3.5 Aerodynamics

Measurement conditions:

Measured with a double chamber intake rig acc. to DIN EN ISO 5801.

Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C;

In the intake and outlet area should not be any solid obstruction within 0,5 m.

The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.


a) Operation condition:

3.300 1/min at free air flow

Frequency: 50 Hz

Nominal voltage: 230 V

Max. free-air flow ($\Delta p = 0$ / $\dot{V} = \text{max.}$)	175,0 m ³ /h
Max. static pressure ($\Delta p = \text{max.}$ / $\dot{V} = 0$)	78 Pa

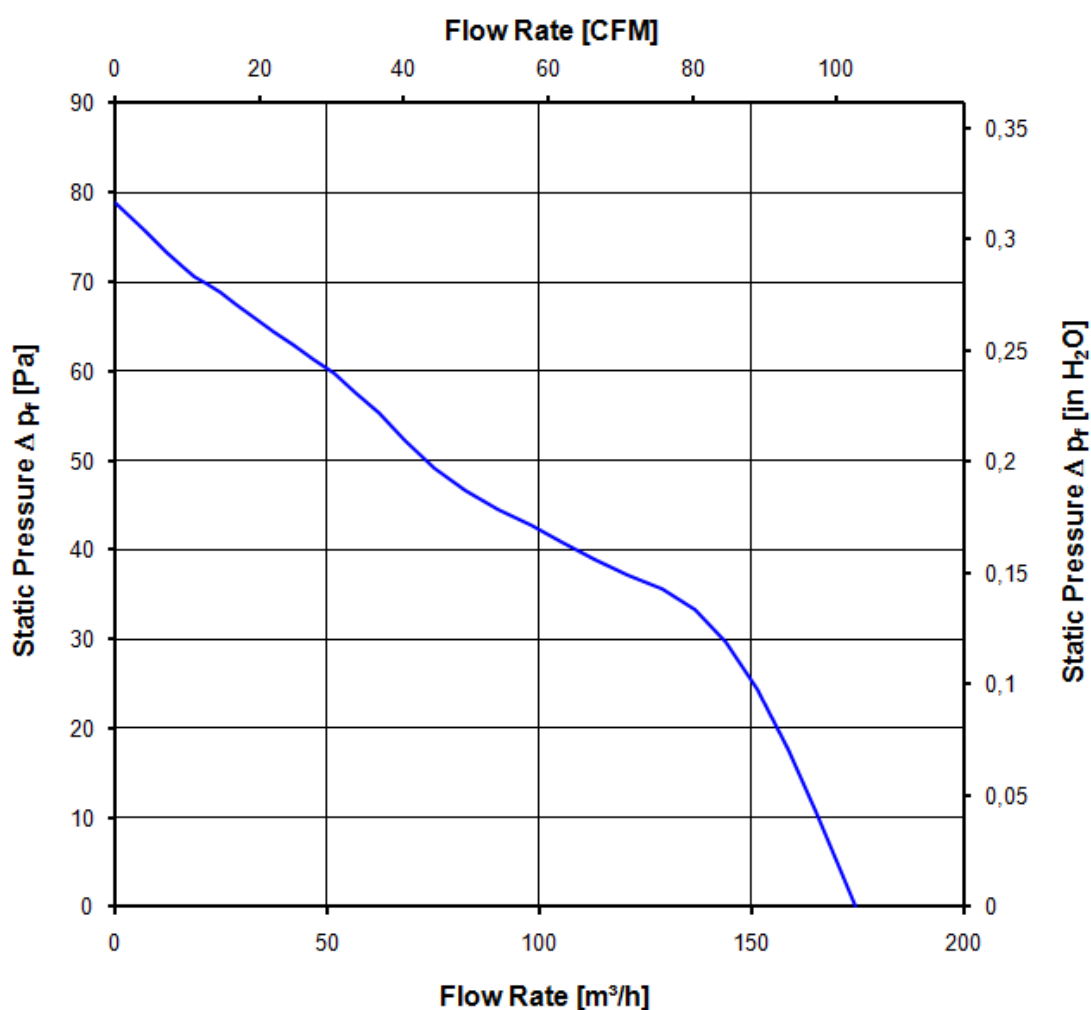

3.6 Sound Data

Measurement conditions: Sound pressure level: 1 Meter distance between microphone and the air intake.
 Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)
 Measured in a semianchoic chamber with a background noise level of $L_p(A) < 5 \text{ dB(A)}$
 For further measurement conditions see section 3.4

a) Operation condition:

3.300 1/min at free air flow

Frequency: 50 Hz

Nominal voltage: 230 V

Optimal operating point	142,0 m ³ /h @ 27 Pa	
Sound power level at the optimal operating point	5,5 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	43,0 dB(A)	

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	75 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic Requirements*)

IP-protection type (certified)	IP 65 (for fan only, not for connector if applicable) **)	
Humidity requirements	humid temperature, cyclic; according to DIN EN 60068-2-38, 10 cycle and condensation water check; according to DIN EN ISO 6270-2, 14 days	
Radiation exposure	Solar radiation; according to DIN EN 60068-2-5	
Salt fog requirements	salt fog, cyclic, in operation; according to DIN EN 60068-2-52, 3 cycle	
Harmful gas requirements	Mixed gas corrosion test; according to DIN EN 60068-2-60	

*) Permitted application area:

The product is for the use in open and unsheltered areas. Direct exposure to water as well as saline ambient conditions are allowed provided that this does not prevent the normal operation.

Pollution degree 3 (according DIN EN 60664-1)

It occurs conductive pollution or dry non-conductive pollution which becomes conductive due to condensation.

**) The specification of the IP protection refers to the conditions mentioned in certification of the fan. The above mentioned short description of the protection scope is not final. For detailed information of the respective protection scope and definitions, see certification as well as DIN EN 60529 (protection by housings) and ISO 20653 (for vehicles) with the letter K.

5 Safety

5.1 Electrical Safety

A verification of thermal conditions (normal and abnormal operation) as well as the protection against electric shock, ingress of solid foreign objects and water has to be done in conjunction with the appliance.

Test voltage HV type test	3000 V
Unit test voltage	VAC
Time type test HV	1 s
Insulation resistance	RI > 10 MOhm
Protection class	built-in fan

5.2 Approval Tests

CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	Yes / GB 12350 Safety Requirements for small Power Motors

6 Reliability

6.1 General


Life expectancy L10 at TU = 40 °C	65.000 h	
Life expectancy L10 at TU max.	30.000 h	
Life expectancy L10 Delta (40 °C)	130.000 h	
Life expectancy L10 acc. to IPC 9591 at TU = 40 °C	110.000 h	

Signifying of this document, and giving its value and the use or communication of the content thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the print or a patent or the registration of a utility model or design.

Seitenschrift und 010 130 1004 (deutsch) /
Refer to protection articles 010 130 1004 (1)

1.) Maße für Montagewand
1.) dimension for worktop mounting

- VZ = verzinkt / tin plated
- Kein Axialspiel bei Kugellager durch Federausgleich
no axial clearance of ball bearings conditional in a pre-load spring

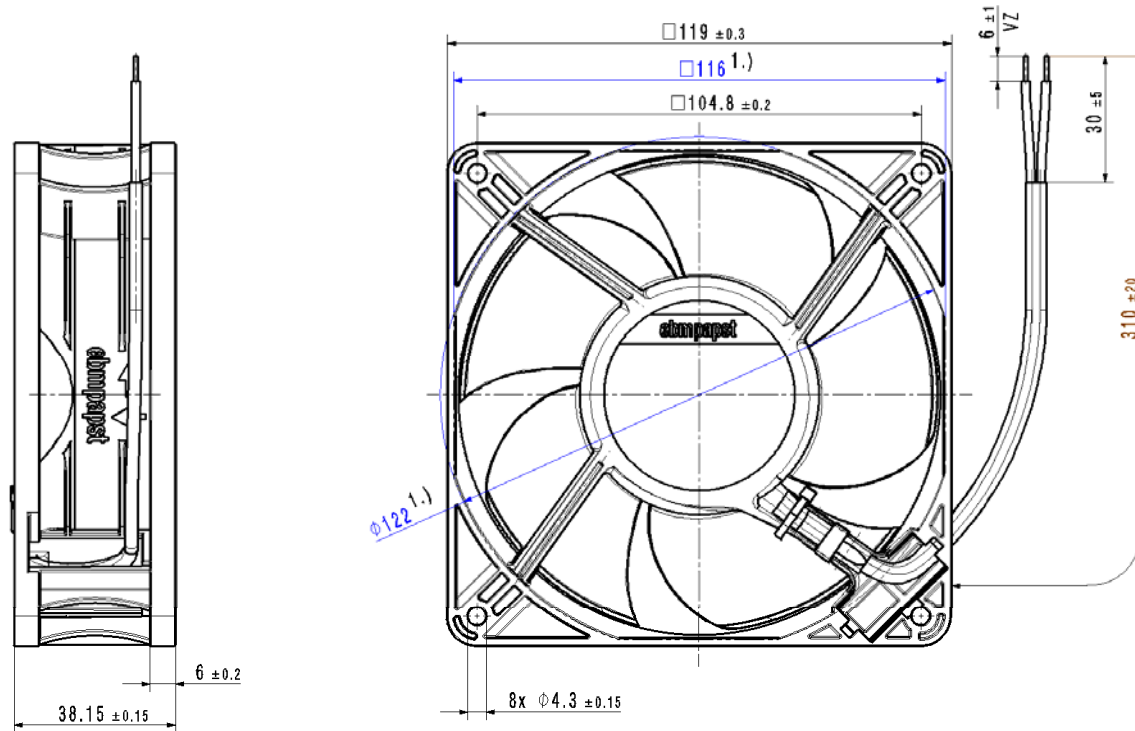

WP-Status/State		Art.-Nr./ Change-No.		DTM-System-Version/ DTM-System-Version		CD-Bezeichnung/ CD-Environment		Werkstoff / Material:		Volumen / Volume (cm³):	
				80050007 GPR001A				Artikel / Title:		Gewicht / Mass (g):	
Tolerierung / Tolerances:				3D-Referenzmodell / 3D-Referenzmodell							
				Datum		Name					
				Bezugs- system							
				Prüf- methode							
								Zug.-Nr. / Drawing No:		Ers.-f.Zahl. / Replaces:	
								Document / Type of Document		Teilnummer / (Part/Tag)	
								Index / Index		Format / Size:	
										Massstab/Scale	