

# 20A & 30A IEC 309 Watertight pin & sleeve devices

|                 |              |
|-----------------|--------------|
| Project Name:   | Prepared By: |
| Project Number: | Date:        |
| Catalog Number: | Type:        |

## Product Description - North American

20A & 30A;  
2-pole, 3-wire grounding;  
3-pole, 4-wire grounding;  
4-pole, 5-wire grounding



AH430R7W


**IP69K  
certified**



AH430P7W



AH430C7W



AH430B7W

## Pin & sleeve plugs features & benefits

- Mechanical cord clamp with silicone rubber grommet seal and locking screw ensures a positive and watertight strain relief system
- Tri-combo cord grip screws for convenience
- Durable impact resistant thermoplastic body
- Color-coded front housing for easy and accurate identification of voltages
- Oversized grounding pin assures mating only with oversized female grounding sleeve; staggered contact to ensure ground makes first and breaks last
- Engineered thermoplastic material improves cold impact performance
- Spring-loaded self-closing cap with silicone rubber gasket protects contacts when not in use. Watertight cap meets IP67 and IP69K protection standards
- Rugged materials selected for use in wet locations; provides corrosion resistance
- Standard mounting footprints and blind holes provide interchangeability with major brands
- Nickel plated pins offer long life corrosion protection
- Pins fully shrouded for mechanical protection; lockout hole for plugs
- Threaded NPT cable entry provides efficient means of attaching flexible conduit or wire mesh grips
- Tapered wiring pockets to ease insertion of stranded wire; deep pockets with clear markings keep bare conductors isolated

**Compliances, specifications and availability are subject to change without notice.**

|                 |              |
|-----------------|--------------|
| Project Name:   | Prepared By: |
| Project Number: | Date:        |
| Catalog Number: | Type:        |

**Table 1. 20A & 30A Pin & sleeve devices for receptacles, plugs, connectors & inlets**

| Rating<br>A | Poles/<br>wires | V/AC, color coding<br>& configurations | Receptacle<br>catalog no. | Plug<br>catalog no. | Connector<br>catalog no. | Inlet<br>catalog no. |
|-------------|-----------------|----------------------------------------|---------------------------|---------------------|--------------------------|----------------------|
| 20          | 2-P, 3-W        | 125                                    | AH320R4W                  | AH320P4W            | AH320C4W                 | AH320B4W             |
|             |                 | 250                                    | AH320R6W                  | AH320P6W            | AH320C6W                 | AH320B6W             |
|             |                 | 480                                    | AH320R7W                  | AH320P7W            | AH320C7W                 | AH320B7W             |
|             | 3-P, 4-W        | 125/250                                | AH420R12W                 | AH420P12W           | AH420C12W                | AH420B12W            |
|             |                 | 3Ø 250                                 | AH420R9W                  | AH420P9W            | AH420C9W                 | AH420B9W             |
|             |                 | 3Ø 480                                 | AH420R7W                  | AH420P7W            | AH420C7W                 | AH420B7W             |
|             |                 | 3Ø 600                                 | AH420R5W                  | AH420P5W            | AH420C5W                 | AH420B5W             |
|             | 4-P, 5-W        | 3ØY 120/208                            | AH520R9W                  | AH520P9W            | AH520C9W                 | AH520B9W             |
|             |                 | 3ØY 277/480                            | AH520R7W                  | AH520P7W            | AH520C7W                 | AH520B7W             |
|             |                 | 3ØY 347/600                            | AH520R5W                  | AH520P5W            | AH520C5W                 | AH520B5W             |
| 30          | 2-P, 3-W        | 125                                    | AH330R4W                  | AH330P4W            | AH330C4W                 | AH330B4W             |
|             |                 | 250                                    | AH330R6W                  | AH330P6W            | AH330C6W                 | AH330B6W             |
|             |                 | 480                                    | AH330R7W                  | AH330P7W            | AH330C7W                 | AH330B7W             |
|             | 3-P, 4-W        | 125/250                                | AH430R12W                 | AH430P12W           | AH430C12W                | AH430B12W            |
|             |                 | 3Ø 250                                 | AH430R9W                  | AH430P9W            | AH430C9W                 | AH430B9W             |
|             |                 | 3Ø 480                                 | AH430R7W                  | AH430P7W            | AH430C7W                 | AH430B7W             |
|             |                 | 3Ø 600                                 | AH430R5W                  | AH430P5W            | AH430C5W                 | AH430B5W             |
|             | 4-P, 5-W        | 3ØY 120/208                            | AH530R9W                  | AH530P9W            | AH530C9W                 | AH530B9W             |
|             |                 | 3ØY 277/480                            | AH530R7W                  | AH530P7W            | AH530C7W                 | AH530B7W             |
|             |                 | 3ØY 347/600                            | AH530R5W                  | AH530P5W            | AH530C5W                 | AH530B5W             |

**Table 2. Ordering matrix**

|                                                                  |                                                                                   |                                                                                                          |                                                                                                                                                                                                                                                                                                                                                             |
|------------------------------------------------------------------|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Pin &amp; sleeve device sample number:</b><br><b>AH420P7W</b> |                                                                                   |                                                                                                          |                                                                                                                                                                                                                                                                                                                                                             |
| <b># of wires</b><br>3 = 3-wire<br>4 = 4-wire<br>5 = 5-wire      | <b>Amperage</b><br>20 = 20 amps<br>30 = 30 amps<br>60 = 60 amps<br>100 = 100 amps | <b>Pin &amp; sleeve devices product type</b><br>P = Plug<br>C = Connector<br>R = Receptacle<br>B = Inlet | <b>Clock position of female grounding contact</b><br>3 = 380V/AC, 50Hz - 440V/AC, 60Hz<br>4 = 125V/AC<br>5 = 277V/AC or 3Ø 600V/AC or 3Ø 347/600V/AC<br>6 = 250V/AC or 380-415V/AC or 220/380-240/415V/AC<br>7 = 480V/AC or 3Ø 480V/AC or 3ØY 277/480V/AC<br>9 = 380-415V/AC or 3Ø 250V/AC or 3ØY 120/208V/AC<br>11 = 440-460V/AC, 60Hz<br>12 = 125/250V/AC |

**Note:**  
Exceptions for pin & sleeve devices:  
Not every clock face position available for each pole/amp/device combo.  
Consult your Eaton wiring devices representative for details.

|                 |              |
|-----------------|--------------|
| Project Name:   | Prepared By: |
| Project Number: | Date:        |
| Catalog Number: | Type:        |

## Applications

The industry's first pin & sleeve devices that are designed to address high pressure, high temperature washdown applications. Arrow Hart's pin and sleeve devices are unlike other brands - our devices are the industry's first to offer IP69K rated protection. Each device has been carefully engineered to offer reliability, efficiency, and added safety protection in demanding wet locations, particularly where harsh washdowns are a must!

**Table 3. Specifications**

| Device Type                          | 20A & 30A<br>pin & sleeve receptacles                                                                                                                                                                                                                                                                                                               | 20A & 30A<br>pin & sleeve plugs                                                                                                                                                                                                                                                                                                       | 20A & 30A<br>pin & sleeve connectors                                                                                                                                                                                                                                                                                                  | 20A & 30A<br>pin & sleeve inlets                                                                                                                                                                                                                                                                                                                    |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Testing &amp; code compliance</b> | <b>Base device:</b> <ul style="list-style-type: none"> <li>Classified to IEC standards 60309-1 and 60309-2</li> <li>cULus listed to UL1682 &amp; UL1686 and CSA 22.2 no. 182.1</li> </ul>                                                                                                                                                           | <b>Base device:</b> <ul style="list-style-type: none"> <li>Classified to IEC standards 60309-1 and 60309-2</li> <li>cULus listed to UL1682 &amp; UL1686 and CSA 22.2 no. 182.1</li> </ul>                                                                                                                                             | <b>Base device:</b> <ul style="list-style-type: none"> <li>Classified to IEC standards 60309-1 and 60309-2</li> <li>cULus listed to UL1682 &amp; UL1686 and CSA 22.2 no. 182.1</li> </ul>                                                                                                                                             | <b>Base device:</b> <ul style="list-style-type: none"> <li>Classified to IEC standards 60309-1 and 60309-2</li> <li>cULus listed to UL1682 &amp; UL1686 and CSA 22.2 no. 182.1</li> </ul>                                                                                                                                                           |
| <b>Environmental specifications</b>  | <b>Flammability:</b> Meets UL94 requirements; HB rated (housing), V0 rated (contact carriers)<br><b>Protection:</b> Watertight to IP67 per IEC 60529 & IP69K to DIN 40050 Part 9                                                                                                                                                                    | <b>Flammability:</b> Meets UL94 requirements; HB rated (housing), V0 rated (contact carriers)<br><b>Protection:</b> Watertight to IP67 per IEC 60529 & IP69K to DIN 40050 Part 9                                                                                                                                                      | <b>Flammability:</b> Meets UL94 requirements; HB rated (housing), V0 rated (contact carriers)<br><b>Protection:</b> Watertight to IP67 per IEC 60529 & IP69K to DIN 40050 Part 9                                                                                                                                                      | <b>Flammability:</b> Meets UL94 requirements; V2 rated (housing), V2 rated (contact carriers)<br><b>Protection:</b> Watertight to IP67 per IEC 60529 & IP69K to DIN 40050 Part 9                                                                                                                                                                    |
| <b>Electrical specifications</b>     | <b>Dielectric voltage:</b> <300V:2000V - 1 minute. >300V:3000V - 1 minute<br><b>Maximum working voltage:</b> 600V (rms)<br><b>Current interrupting:</b> Yes, at full-rated current & voltage<br><b>Temperature rise:</b> Max. 30°C (86°F) after 50 cycles of overload @150% of rated current<br><b>Endurance:</b> <20A:5000 cycles >20A:1000 cycles | <b>Dielectric voltage:</b> 1000V plus 2x rated V - 1 minute<br><b>Maximum working voltage:</b> 600V (rms)<br><b>Current interrupting:</b> Yes, at full-rated current & voltage<br><b>Temperature rise:</b> Max. 30°C (86°F) after 50 cycles of overload @150% of rated current<br><b>Endurance:</b> <20A:5000 cycles >20A:1000 cycles | <b>Dielectric voltage:</b> 1000V plus 2x rated V - 1 minute<br><b>Maximum working voltage:</b> 600V (rms)<br><b>Current interrupting:</b> Yes, at full-rated current & voltage<br><b>Temperature rise:</b> Max. 30°C (86°F) after 50 cycles of overload @150% of rated current<br><b>Endurance:</b> <20A:5000 cycles >20A:1000 cycles | <b>Dielectric voltage:</b> <300V:2000V - 1 minute. >300V:3000V - 1 minute<br><b>Maximum working voltage:</b> 600V (rms)<br><b>Current interrupting:</b> Yes, at full-rated current & voltage<br><b>Temperature rise:</b> Max. 30°C (86°F) after 50 cycles of overload @150% of rated current<br><b>Endurance:</b> <20A:5000 cycles >20A:1000 cycles |
| <b>Mechanical Specifications</b>     | <b>Voltage ratings:</b> Marked on device<br><b>Impact resistance:</b> UL1682<br><b>Cable grip retention:</b> UL1682                                                                                                                                                                                                                                 | <b>Voltage ratings:</b> Marked on device<br><b>Impact resistance:</b> UL1682<br><b>Cable grip retention:</b> UL1682                                                                                                                                                                                                                   | <b>Voltage ratings:</b> Marked on device<br><b>Impact resistance:</b> UL1682<br><b>Cable grip retention:</b> UL1682                                                                                                                                                                                                                   | <b>Voltage ratings:</b> Marked on device<br><b>Impact resistance:</b> UL1682<br><b>Cable grip retention:</b> UL1682                                                                                                                                                                                                                                 |

**Table 4. Materials**

| Device Type                         | 20A & 30A pin & sleeve<br>receptacles | 20A & 30A pin & sleeve plugs | 20A & 30A pin & sleeve<br>connectors | 20A & 30A pin & sleeve inlets |
|-------------------------------------|---------------------------------------|------------------------------|--------------------------------------|-------------------------------|
| <b>Housing &amp; flange</b>         | Nylon PA6-GF30                        | Nylon PA6-GF30               | Nylon PA6-GF30                       | Nylon PA6                     |
| <b>Back body</b>                    | N/A                                   | Nylon PA6-GF30               | Nylon PA6-GF30                       | N/A                           |
| <b>Contact carrier</b>              | Nylon PA6                             | Nylon PA6                    | Nylon PA6                            | Nylon PA6                     |
| <b>Sleeves</b>                      | Nickel plated brass                   | N/A                          | Nickel plated brass                  | N/A                           |
| <b>Contact spring on sleeves</b>    | Nickel plated spring steel            | N/A                          | Nickel plated spring steel           | N/A                           |
| <b>Pins</b>                         | N/A                                   | Nickel plated brass          | N/A                                  | Nickel plated brass           |
| <b>External strain relief clamp</b> | N/A                                   | Nylon PA6-GF30               | Nylon PA6-GF30                       | N/A                           |
| <b>Cable seal</b>                   | N/A                                   | Silicon rubber               | Silicon rubber                       | N/A                           |
| <b>Support washer for cord grip</b> | N/A                                   | Plated steel                 | Plated steel                         | N/A                           |
| <b>Cover</b>                        | Nylon PA6-GF30                        | N/A                          | Nylon PA6-GF30                       | N/A                           |
| <b>Hinge pin</b>                    | Nylon PA6-GF30                        | N/A                          | Nylon PA6-GF30                       | N/A                           |
| <b>Cover spring</b>                 | Stainless steel                       | N/A                          | Stainless steel                      | N/A                           |
| <b>Cover gasket</b>                 | Silicon rubber                        | N/A                          | Silicon rubber                       | N/A                           |
| <b>Flange gasket</b>                | Silicon rubber                        | N/A                          | N/A                                  | Silicon rubber                |
| <b>Terminal screws</b>              | Nickel plated steel                   | Nickel plated steel          | Nickel plated steel                  | Nickel plated steel           |
| <b>Assembly screws</b>              | Stainless steel                       | Stainless steel              | Stainless steel                      | Stainless steel               |

|                 |              |
|-----------------|--------------|
| Project Name:   | Prepared By: |
| Project Number: | Date:        |
| Catalog Number: | Type:        |

Product Dimensions  
20A Receptacles, Front, Side & Back Views

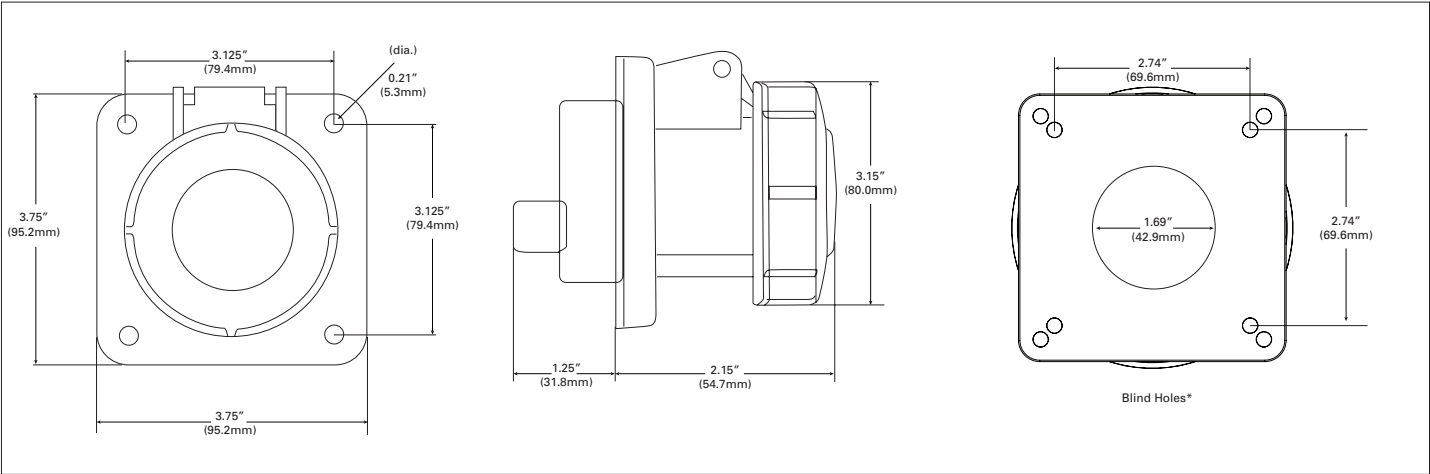


Figure 1. 20A 2-P, 3-W Receptacles, Front, Side & Back Views

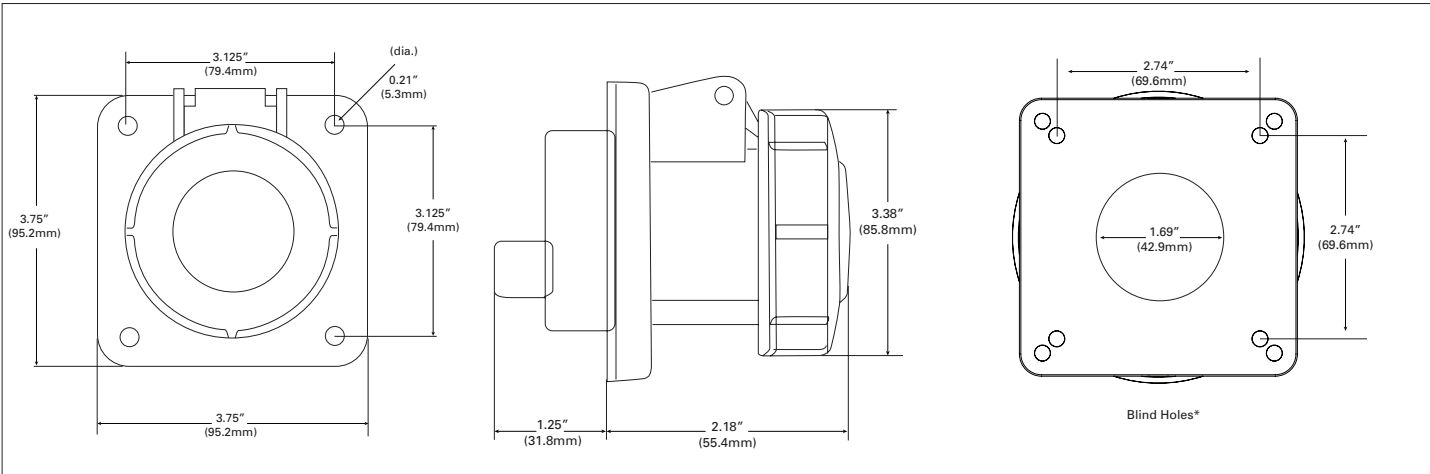


Figure 2. 20A 3-P, 4-W Receptacles, Front, Side & Back Views

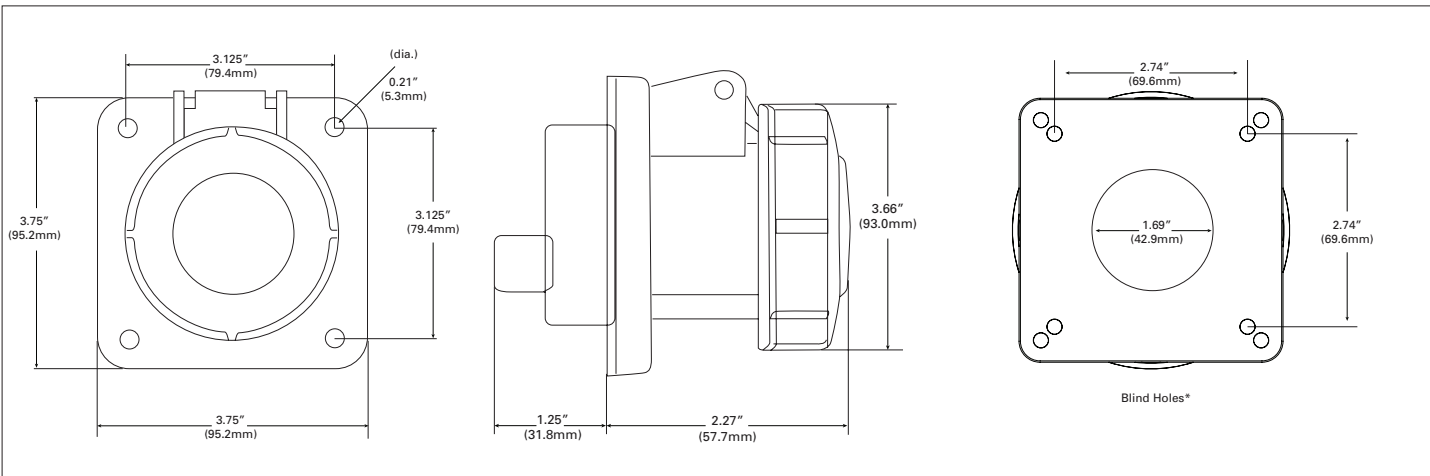


Figure 3. 20A 4-P, 5-W Receptacles, Front, Side & Back Views

|                 |              |
|-----------------|--------------|
| Project Name:   | Prepared By: |
| Project Number: | Date:        |
| Catalog Number: | Type:        |

Product Dimensions

20A Plugs

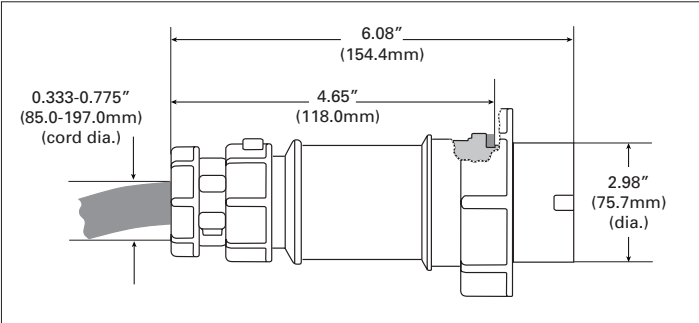


Figure 4. 20A 2-P, 3-W Plugs

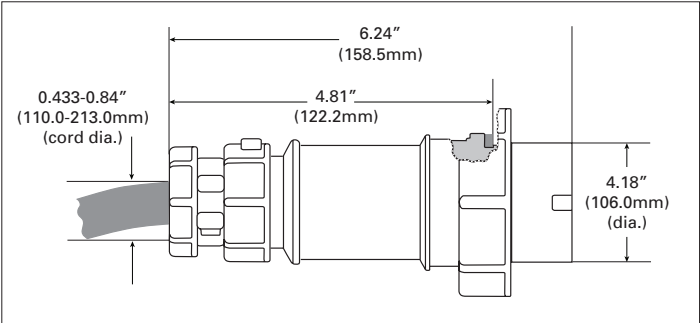


Figure 6. 20A 4-P, 5-W Plugs

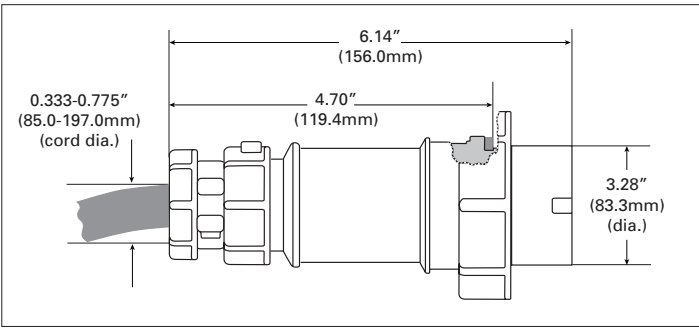


Figure 5. 20A 3-P, 4-W Plugs

20A Connectors

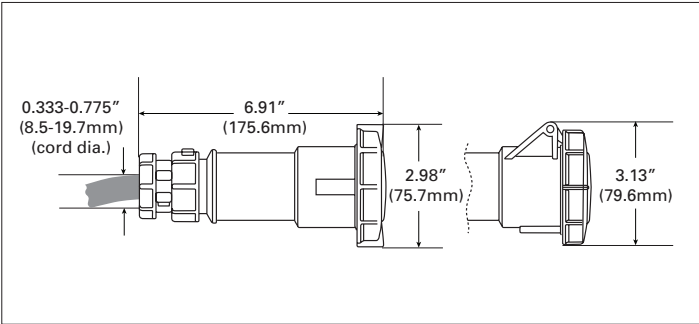


Figure 7. 20A 2-P, 3-W Underside & Side View Connectors

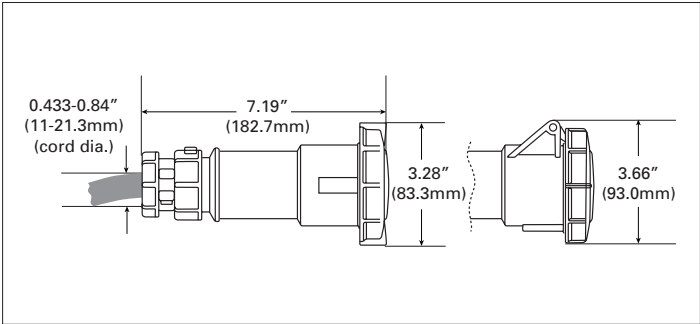


Figure 9. 20A 4-P, 5-W Underside & Side View Connectors

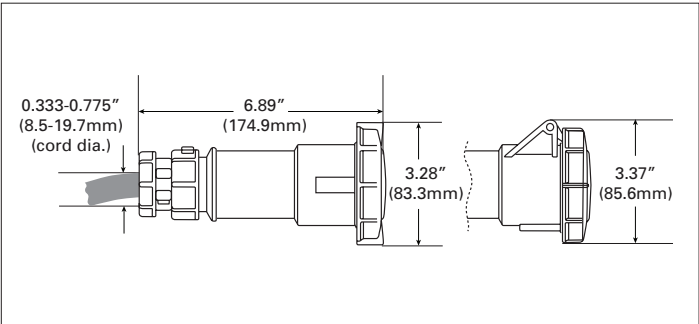


Figure 8. 20A 3-P, 4-W Underside & Side View Connectors

|                 |              |
|-----------------|--------------|
| Project Name:   | Prepared By: |
| Project Number: | Date:        |
| Catalog Number: | Type:        |

Product Dimensions

20A Inlets

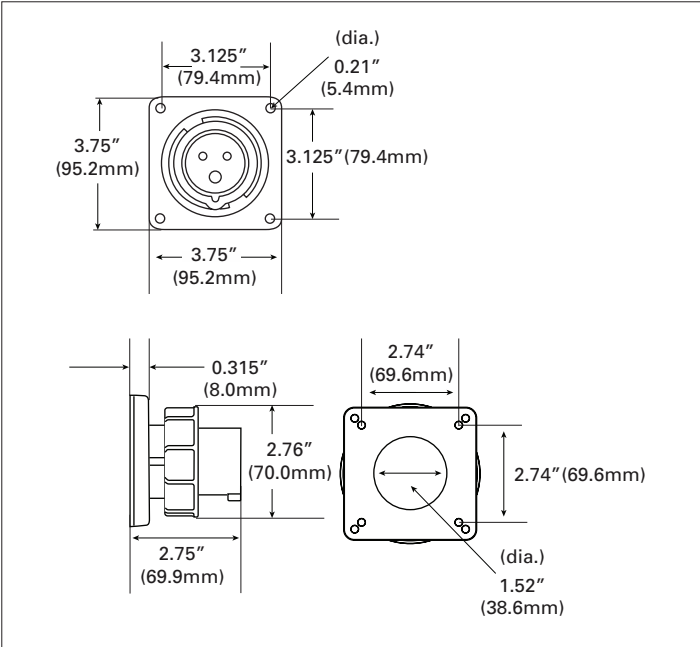


Figure 10. 20A 2-P, 3-W Front, Side & Back View Inlets

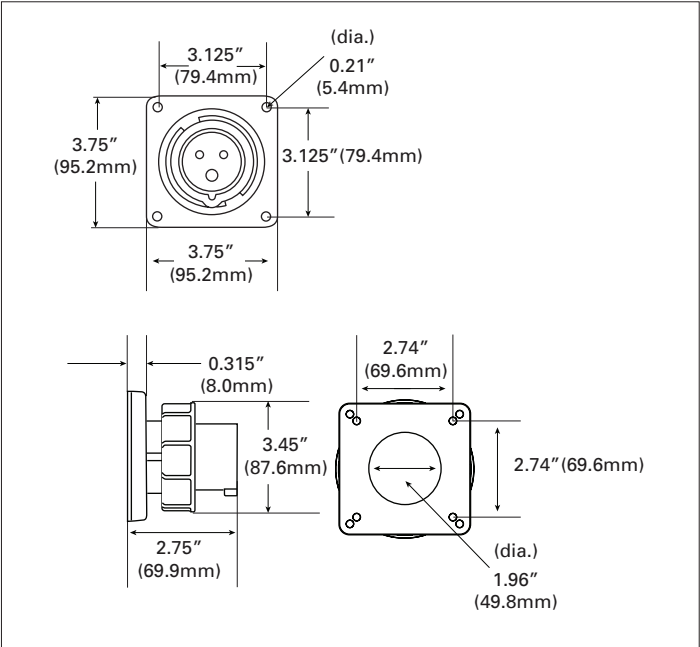


Figure 12. 20A 4-P, 5-W Front, Side & Back View Inlets

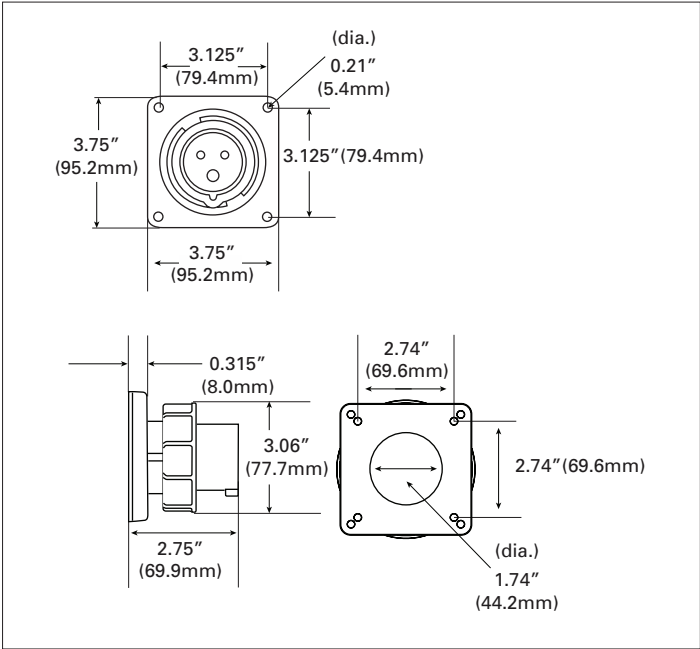


Figure 11. 20A 3-P, 4-W Front, Side & Back View Inlets

|                 |              |
|-----------------|--------------|
| Project Name:   | Prepared By: |
| Project Number: | Date:        |
| Catalog Number: | Type:        |

Product Dimensions

30A Receptacles

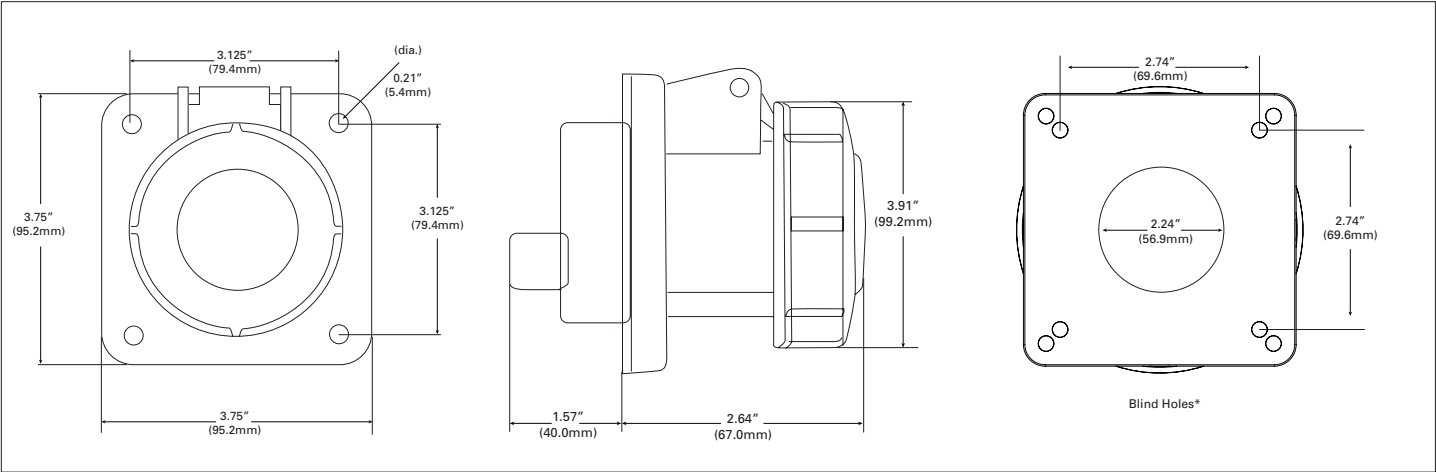


Figure 13. 30A 2-P, 3-W & 3-P, 4-W Receptacles, Front, Side & Back Views

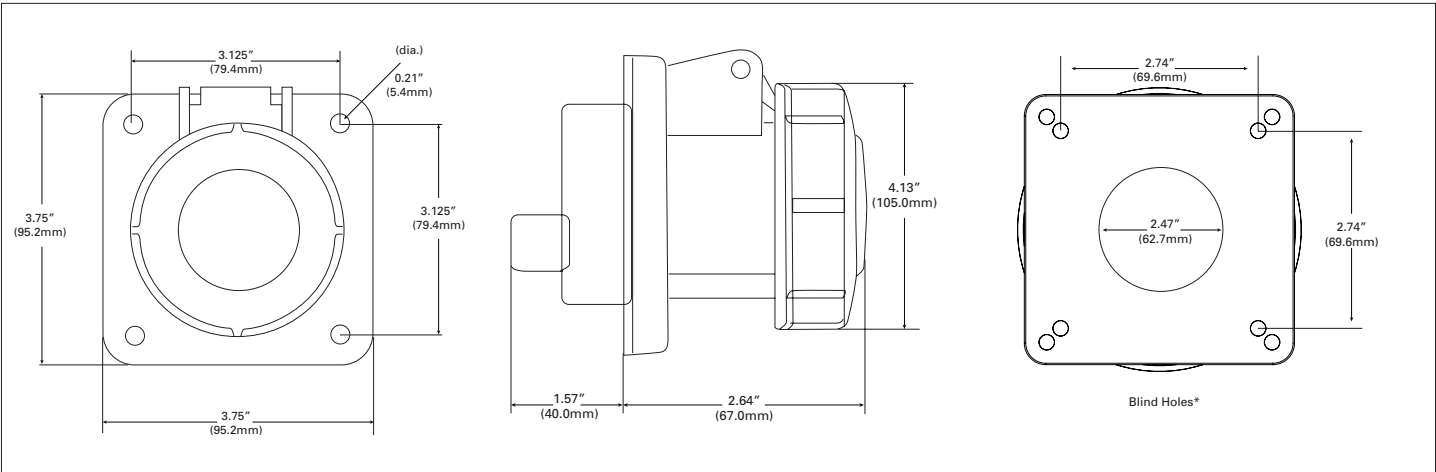


Figure 14. 30A 4-P, 5-W Receptacles, Front, Side & Back Views

|                 |              |
|-----------------|--------------|
| Project Name:   | Prepared By: |
| Project Number: | Date:        |
| Catalog Number: | Type:        |

Product Dimensions

30A Plugs

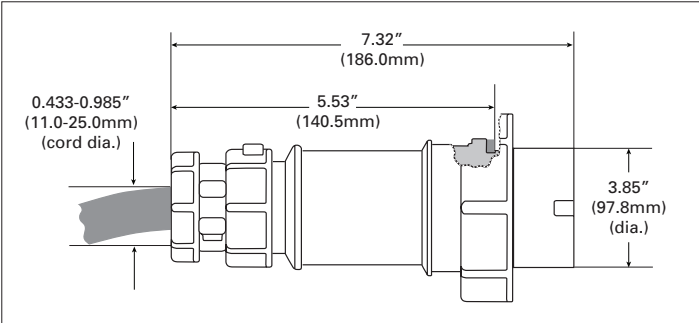


Figure 15. 30A 2-P, 3-W & 3-P, 4-W Plugs

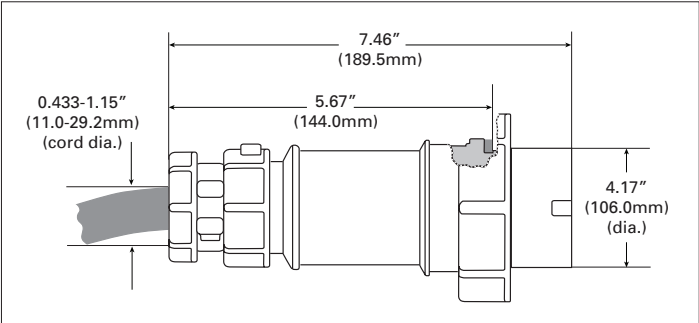


Figure 16. 30A 4-P, 5-W Plugs

30A Connectors

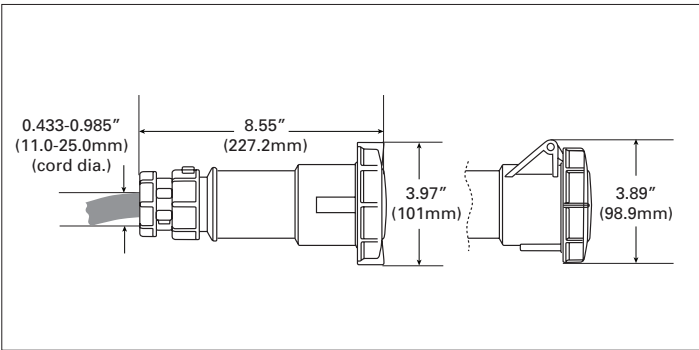


Figure 17. 30A 2-P, 3-W & 3-P, 4-W Underside & Side View Connectors

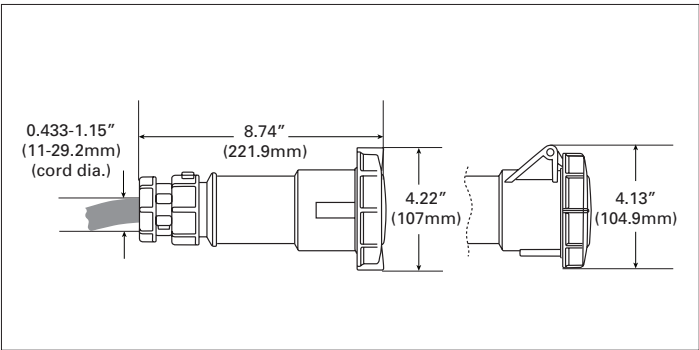


Figure 18. 30A 4-P, 5-W Underside & Side View Connectors

30A Inlets

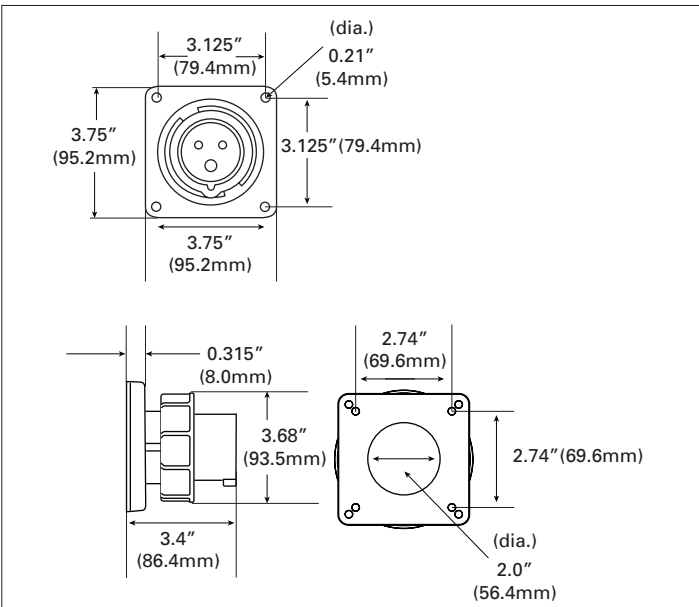


Figure 19. 30A 2-P, 3-W & 3-P, 4, Front, Side & Back View Inlets

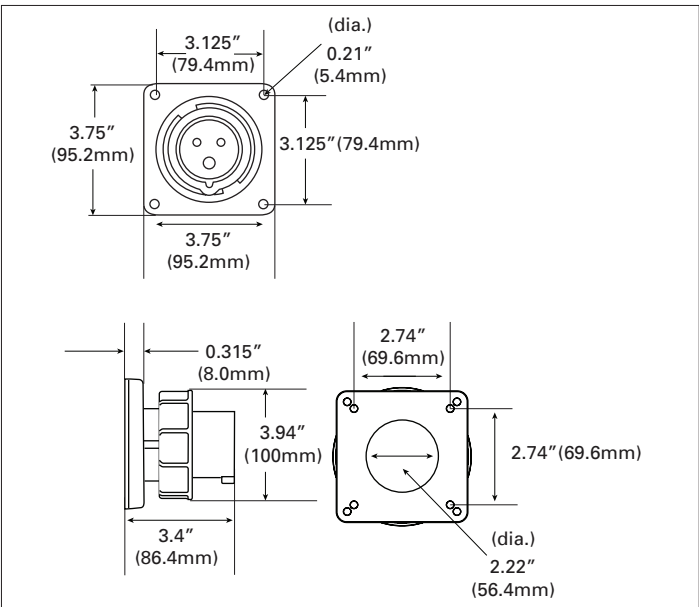


Figure 20. 30A 4-P, 5-W Front, Side & Back View Inlets

20A & 30A IEC 309  
Watertight pin & sleeve devices

Technical Data  
Effective November 2014

|                 |              |
|-----------------|--------------|
| Project Name:   | Prepared By: |
| Project Number: | Date:        |
| Catalog Number: | Type:        |

Certifications & Compliances

| Catalog No. |           |           |           |   |
|-------------|-----------|-----------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AH320R4W    | AH320P4W  | AH320C4W  | AH320B4W  | •                                                                                                                                                                   |
| AH320R6W    | AH320P6W  | AH320C6W  | AH320B6W  | •                                                                                                                                                                   |
| AH320R7W    | AH320P7W  | AH320C7W  | AH320B7W  | •                                                                                                                                                                   |
| AH420R12W   | AH420P12W | AH420C12W | AH420B12W | •                                                                                                                                                                   |
| AH420R9W    | AH420P9W  | AH420C9W  | AH420B9W  | •                                                                                                                                                                   |
| AH420R7W    | AH420P7W  | AH420C7W  | AH420B7W  | •                                                                                                                                                                   |
| AH420R5W    | AH420P5W  | AH420C5W  | AH420B5W  | •                                                                                                                                                                   |
| AH520R9W    | AH520P9W  | AH520C9W  | AH520B9W  | •                                                                                                                                                                   |
| AH520R7W    | AH520P7W  | AH520C7W  | AH520B7W  | •                                                                                                                                                                   |
| AH520R5W    | AH520P5W  | AH520C5W  | AH520B5W  | •                                                                                                                                                                   |
| AH330R4W    | AH330P4W  | AH330C4W  | AH330B4W  | •                                                                                                                                                                   |
| AH330R6W    | AH330P6W  | AH330C6W  | AH330B6W  | •                                                                                                                                                                   |
| AH330R7W    | AH330P7W  | AH330C7W  | AH330B7W  | •                                                                                                                                                                   |
| AH430R12W   | AH430P12W | AH430C12W | AH430B12W | •                                                                                                                                                                   |
| AH430R9W    | AH430P9W  | AH430C9W  | AH430B9W  | •                                                                                                                                                                   |
| AH430R7W    | AH430P7W  | AH430C7W  | AH430B7W  | •                                                                                                                                                                   |
| AH430R5W    | AH430P5W  | AH430C5W  | AH430B5W  | •                                                                                                                                                                   |
| AH530R9W    | AH530P9W  | AH530C9W  | AH530B9W  | •                                                                                                                                                                   |
| AH530R7W    | AH530P7W  | AH530C7W  | AH530B7W  | •                                                                                                                                                                   |
| AH530R5W    | AH530P5W  | AH530C5W  | AH530B5W  | •                                                                                                                                                                   |

KEY:  IEC  cULus

Electrical Sector  
203 Cooper Circle  
Peachtree City, GA 30269  
United States  
Eaton.com  
Cooperwiringdevices.com

Electrical Sector  
Canada Operations  
5925 McLaughlin Road  
Mississauga, Ontario, L5R 1B8  
Canada  
EatonCanada.ca  
Cooperwiringdevices.com

Electrical Sector  
Mexico Operations  
Carr. Tlalnepantla -  
Cuautitlan Km 178 s/n  
Col. Villa Jardin esq.  
Cerrada 8 de Mayo  
Cuautitlan, Mexico CP 54800  
Mexico  
Eaton.mx  
Cooperwiringdevices.com

### IEC 309 watertight pin & sleeve devices

#### Product description

**North American** 20A, 30A, 60A & 100A for receptacles, plugs, connectors & inlets



Receptacle



Plug



Connector



Inlet



AH560R9W-5

| Rating<br>A | Poles/<br>wires | V/AC, color coding<br>& configurations | Receptacle<br>catalog no. | Plug<br>catalog no. | Connector<br>catalog no. | Inlet<br>catalog no. | 15° Angled<br>Receptacle<br>catalog no. |
|-------------|-----------------|----------------------------------------|---------------------------|---------------------|--------------------------|----------------------|-----------------------------------------|
| 20          | 2-P, 3-W        | 125                                    | AH320R4W                  | AH320P4W            | AH320C4W                 | AH320B4W             | —                                       |
|             |                 | 250                                    | AH320R6W                  | AH320P6W            | AH320C6W                 | AH320B6W             | —                                       |
|             |                 | 480                                    | AH320R7W                  | AH320P7W            | AH320C7W                 | AH320B7W             | —                                       |
|             | 3-P, 4-W        | 125/250                                | AH420R12W                 | AH420P12W           | AH420C12W                | AH420B12W            | —                                       |
|             |                 | 3Ø 250                                 | AH420R9W                  | AH420P9W            | AH420C9W                 | AH420B9W             | —                                       |
|             |                 | 3Ø 480                                 | AH420R7W                  | AH420P7W            | AH420C7W                 | AH420B7W             | —                                       |
|             |                 | 3Ø 600                                 | AH420R5W                  | AH420P5W            | AH420C5W                 | AH420B5W             | —                                       |
|             | 4-P, 5-W        | 3ØY 120/208                            | AH520R9W                  | AH520P9W            | AH520C9W                 | AH520B9W             | —                                       |
|             |                 | 3ØY 277/480                            | AH520R7W                  | AH520P7W            | AH520C7W                 | AH520B7W             | —                                       |
|             |                 | 3ØY 347/600                            | AH520R5W                  | AH520P5W            | AH520C5W                 | AH520B5W             | —                                       |
| 30          | 2-P, 3-W        | 125                                    | AH330R4W                  | AH330P4W            | AH330C4W                 | AH330B4W             | —                                       |
|             |                 | 250                                    | AH330R6W                  | AH330P6W            | AH330C6W                 | AH330B6W             | —                                       |
|             |                 | 480                                    | AH330R7W                  | AH330P7W            | AH330C7W                 | AH330B7W             | —                                       |
|             | 3-P, 4-W        | 125/250                                | AH430R12W                 | AH430P12W           | AH430C12W                | AH430B12W            | —                                       |
|             |                 | 3Ø 250                                 | AH430R9W                  | AH430P9W            | AH430C9W                 | AH430B9W             | —                                       |
|             |                 | 3Ø 480                                 | AH430R7W                  | AH430P7W            | AH430C7W                 | AH430B7W             | —                                       |
|             |                 | 3Ø 600                                 | AH430R5W                  | AH430P5W            | AH430C5W                 | AH430B5W             | —                                       |
|             | 4-P, 5-W        | 3ØY 120/208                            | AH530R9W                  | AH530P9W            | AH530C9W                 | AH530B9W             | —                                       |
|             |                 | 3ØY 277/480                            | AH530R7W                  | AH530P7W            | AH530C7W                 | AH530B7W             | —                                       |
|             |                 | 3ØY 347/600                            | AH530R5W                  | AH530P5W            | AH530C5W                 | AH530B5W             | —                                       |
| 60          | 2-P, 3-W        | 125                                    | AH360R4W                  | AH360P4W            | AH360C4W                 | AH360B4W             | —                                       |
|             |                 | 250                                    | AH360R6W                  | AH360P6W            | AH360C6W                 | AH360B6W             | —                                       |
|             |                 | 480                                    | AH360R7W                  | AH360P7W            | AH360C7W                 | AH360B7W             | —                                       |
|             | 3-P, 4-W        | 125/250                                | AH460R12W                 | AH460P12W           | AH460C12W                | AH460B12W            | —                                       |
|             |                 | 3Ø 250                                 | AH460R9W                  | AH460P9W            | AH460C9W                 | AH460B9W             | —                                       |
|             |                 | 3Ø 480                                 | AH460R7W                  | AH460P7W            | AH460C7W                 | AH460B7W             | —                                       |
|             |                 | 3Ø 600                                 | AH460R5W                  | AH460P5W            | AH460C5W                 | AH460B5W             | —                                       |
|             | 4-P, 5-W        | 3ØY 120/208                            | AH560R9W                  | AH560P9W            | AH560C9W                 | AH560B9W             | AH560R9W-15                             |
|             |                 | 3ØY 277/480                            | AH560R7W                  | AH560P7W            | AH560C7W                 | AH560B7W             | —                                       |
|             |                 | 3ØY 347/600                            | AH560R5W                  | AH560P5W            | AH560C5W                 | AH560B5W             | —                                       |
| 100         | 2-P, 3-W        | 125                                    | AH3100R4W                 | AH3100P4W           | AH3100C4W                | AH3100B4W            | —                                       |
|             |                 | 250                                    | AH3100R6W                 | AH3100P6W           | AH3100C6W                | AH3100B6W            | —                                       |
|             |                 | 480                                    | AH3100R7W                 | AH3100P7W           | AH3100C7W                | AH3100B7W            | —                                       |
|             | 3-P, 4-W        | 125/250                                | AH4100R12W                | AH4100P12W          | AH4100C12W               | AH4100B12W           | AH4100R12W-15                           |
|             |                 | 3Ø 250                                 | AH4100R9W                 | AH4100P9W           | AH4100C9W                | AH4100B9W            | —                                       |
|             |                 | 3Ø 480                                 | AH4100R7W                 | AH4100P7W           | AH4100C7W                | AH4100B7W            | AH4100R7W-15                            |
|             |                 | 3Ø 600                                 | AH4100R5W                 | AH4100P5W           | AH4100C5W                | AH4100B5W            | —                                       |
|             | 4-P, 5-W        | 3ØY 120/208                            | AH5100R9W                 | AH5100P9W           | AH5100C9W                | AH5100B9W            | AH5100R9W-15                            |
|             |                 | 3ØY 277/480                            | AH5100R7W                 | AH5100P7W           | AH5100C7W                | AH5100B7W            | AH5100R7W-15                            |
|             |                 | 3ØY 347/600                            | AH5100R5W                 | AH5100P5W           | AH5100C5W                | AH5100B5W            | —                                       |

Compliances, specifications and availability are subject to change without notice.