

AKZ500/..DS-5.08-H-GREY



A Phoenix Mecano Brand


Technical Data

Wire sizes		Insulating Material	
Solid min	0.2 mm²	Material	PA 6.6
Solid max	1.5 mm²	Flammability Class	UL 94 V-0
Stranded (flexible) min	0.2mm²	Temperatures	
Stranded (flexible) max	1.5 mm²	Operating Temperature (without mech. load)	-40 °C - 105 °C
Stranded with Ferrule min	0.2 mm²	Store Temperature	-40 °C - 105 °C
Stranded with Ferrule max	1.5 mm²	Wave Soldering Process	
Dimensions		Soldering Temperature, recommended	260 °C
Stripped Length	5.0 mm	Peak Soldering Time, recommended	3-4 s
PCB Hole Diameter	1.3 mm	Reflow Process	
Materials		Soldering Temperature, recommended	-
Clamp	Brass	Peak Soldering Time, recommended	-
Wire Guard	Stainless Steel		
Screw	Steel		

Colours

	GREY, RAL 7016
	BLUE, RAL 5015

Colours according to RAL, there may be variations on colour due to production conditions. Special colours on request.

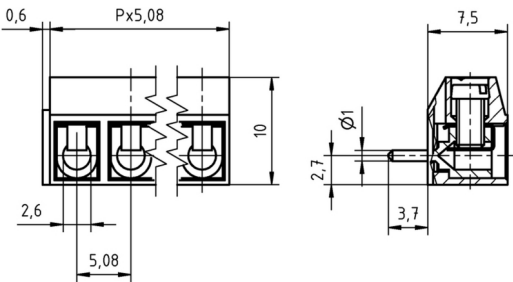

Order Data (Spacing 5.08 mm)

Poles	Width (mm)	Article Designation	Article Number	PU
2	10.76	AKZ500/2DS-5.08-H-GREY	50500020184 G	250
3	15.84	AKZ500/3DS-5.08-H-GREY	50500030184 G	250
4	20.92	AKZ500/4DS-5.08-H-GREY	50500040184 G	250
5	26.00	AKZ500/5DS-5.08-H-GREY	50500050184 G	250
6	31.08	AKZ500/6DS-5.08-H-GREY	50500060184 G	250
7	36.16	AKZ500/7DS-5.08-H-GREY	50500070184 G	250
8	41.24	AKZ500/8DS-5.08-H-GREY	50500080184 E	100
9	46.32	AKZ500/9DS-5.08-H-GREY	50500090184 E	100
10	51.40	AKZ500/10DS-5.08-H-GREY	50500100184 E	100
11	56.48	AKZ500/11DS-5.08-H-GREY	50500110184 E	100
12	61.56	AKZ500/12DS-5.08-H-GREY	50500120184 E	100

Accessoires

Figure	Designation	Article Number
	Bridge, 2-pole, insulated, BRI/2-5.0/5.08-LIGHT GREY	Order Data: 500000000006
	Bridge, 3-pole, insulated, BRI/3-5.0/5.08-LIGHT GREY	Order Data: 500000000007
	Bridge, 2-pole, BR/2-5.0/5.08-L7.0	Order Data: 500000000008

Ratings

UseGroup	B	C	D		
Rated Voltage	300 V	-	300 V		250 V
Rated Current	15 A	-	10 A		17.5 A
Rated Wire Size				min	max
- solid	AWG 22-14	-	AWG 22-14	0.5 mm²	1.5 mm²
- stranded	AWG 22-14	-	AWG 22-14	0.5 mm²	1.5 mm²
Torque	0.40 Nm	-	0.40 Nm		0.40 Nm
Screw Size	M2.6	-	M2.6		M2.6
Test Voltage	1.60 kV	-	1.60 kV		2.0 kV