



World Wide [Change](#)

[Home](#) [Products](#) [Support](#) [Services](#) [Selectors](#) [How to Buy](#)


Basic Rack PDU

Rack PDU, Basic, Zero U, 32A, 230V, (20)C13 & (4)C19

AP7553

[Email Technical Specification](#)

[Printer Friendly](#)

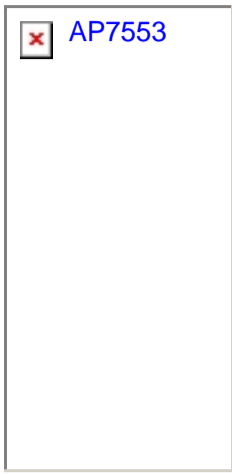

APC Basic Rack PDU , Input: 230V , Input Connections: IEC 309 32A 2P+E , Cord Length: 10 feet (3.05 meters) , Output: 230V , Output Connections: IEC 320 C13,IEC 320 C19

Includes Installation guide, Rack Mounting brackets, Toolless Mounting Kit

Standard Lead Time Usually in Stock

[More Images](#)

[Technical Specifications](#) [Product Overview](#) [Documentation](#) [Options](#)

Output

Nominal Output Voltage

230V

Maximum Total Current Draw per Phase

32A

Output Connections

(20) IEC 320 C13

(4) IEC 320 C19



Input

Nominal Input Voltage

230V

Input Frequency

47 - 63 Hz

Input Connections

IEC 309 32A 2P+E

Cord Length

3.05 meters

Number of Power Cords

1

Maximum Input Current per phase

32A

Load Capacity

7360 VA

Physical

Net Weight

5.57 KG

Maximum Height

1619.00 mm

Maximum Width

56.00 mm

Maximum depth

44.00 mm

Shipping Weight

6.48 KG

Shipping Height

2134.00 mm

Shipping Width

152.00 mm

Shipping Depth

127.00 mm

Color

Black

Environmental

Operating Environment

0 - 45 °C

Operating Relative Humidity

0 - 95%

Operating Elevation

0-3000 meters

Storage Temperature

-25 - 65 °C

Storage Relative Humidity

0 - 95%

Storage Elevation

0-15000 meters

Conformance

Regulatory Approvals

CCC,CE,VDE

Standard Warranty

2 years repair or replace

[Copyright](#) © American Power Conversion Corp., all rights reserved

[About APC](#) [Investors](#) [Job Seekers](#) [Press](#) [Feedback](#) [Contact](#) [Privacy Policy](#)