

SPECIFICATIONS

Mechanical

Contact Retention Force: 0.10kg min.
Durability : 60 Cycles

Electrical

Voltage Rating: 25V
Current Rating: 0.5A
Contact Resistance: 60mΩ max.
Dielectric Withstanding Voltage: 250V AC/1 min.
Insulation Resistance: 100MΩ

Physical


Housing: Thermoplastic, UL 94V-0 rated in Black Color
Contact: Copper alloy
Plating: See "ORDERING INFORMATION"
Metal Spring: Copper alloy
Operating Temperature: -55°C to +85°C

DDRIV SO DIMM Socket

AS Series
9.2 mm Height
SMT Type
0.50mm Pitch
260 Pos.



DRAWING

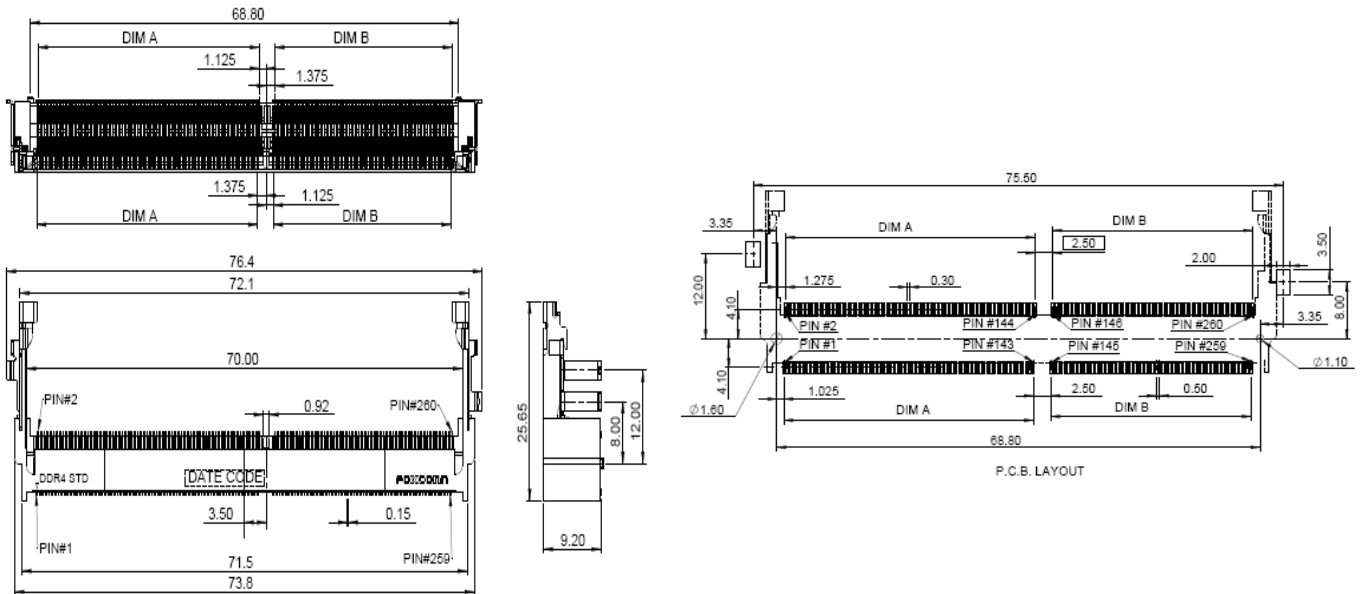

ORDERING INFORMATION

PRODUCT NO.: **A S A A8 2 * - E A * B 0 - * H**

- Memory Module Socket
- Horizontal Type
- Single Row
- No. Of Pos. (A8=260 Pos.)
- SMT Type
- Contact Area Plating (1=Gold Flash, Y=5u"Gold Plating, 6=10u"Gold Plating, 7=15u"Gold Plating, 3=30u"Gold Plating)
- HALOGEN /LEAD FREE
- Package Code (4=Soft Tray, 7=Tape Reel)
- 0=Normal Type
- B=BLACK COLOR
- S=Standard
- R=Reverse
- A=9.2mm Height
- E=DDR SODIMM

AS0A82*-EASB0-*H	35.50	28.50
AS0A82*-EARB0-*H	28.50	35.50
P/ N	DIM.A	DIM.B