




ASE22RGS Product Details

Share Print Email

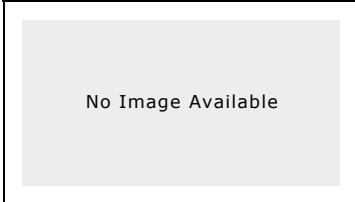

ASE22RGS (1-1437581-0)

TE Internal Number: 1-1437581-0

Active

Slide Switches

Always ELV Compliant (Find RoHS Compliant Alternates/Statement of Compliance)

Product Highlights:

- 2 Positions
- Double Pole - Double Throw Configuration (Pole-Throw)
- Actuator Style = Extended, Side
- Actuator Color = Black
- ASE/F Series

[View all Features](#)

Quick Links

- ▶ Pricing & Availability
- ▶ Search for Tooling
- ▶ Product Feature Selector
- ▶ Contact Us About This Product

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

Documentation & Additional Information

<p>Product Drawings:</p> <ul style="list-style-type: none"> • SLIDE SWITCH ASE/ASF, AUTO-INSERTABLE, THRU-HOLE AND... (PDF, English) <p>Catalog Pages/Data Sheets:</p> <ul style="list-style-type: none"> • None Available <p>Product Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Application Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Instruction Sheets:</p> <ul style="list-style-type: none"> • None Available <p>CAD Files:</p> <ul style="list-style-type: none"> • None Available 	<p>Additional Information:</p> <ul style="list-style-type: none"> • Product Line Information <p>Additional Product Images:</p> <ul style="list-style-type: none"> • Dimensional Drawing <p>Related Products:</p> <ul style="list-style-type: none"> • Tooling
---	---

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

<p>Product Type Features:</p> <ul style="list-style-type: none"> • Actuator Style = Extended, Side • Mount Angle = Right Angle • Terminal Configuration = Standard • Grade = Telecom <p>Electrical Characteristics:</p> <ul style="list-style-type: none"> • Contact Rating = 0.4 VA max @ 20 VDC or peak AC <p>Termination Features:</p> <ul style="list-style-type: none"> • Termination Type = PC <p>Body Features:</p> <ul style="list-style-type: none"> • Actuator Color = Black • Mount Style = Reverse L Leg Configuration, Surface Mount • Switch Style = Auto-insertable • Actuator Material = Polyester 	<p>Contact Features:</p> <ul style="list-style-type: none"> • Contact Plating = Gold • Contact Base Material = Copper Alloy <p>Configuration Features:</p> <ul style="list-style-type: none"> • Number of Positions = 2 • Configuration (Pole-Throw) = Double Pole - Double Throw • Number of Actuators = Single <p>Industry Standards:</p> <ul style="list-style-type: none"> • RoHS/ELV Compliance = ELV compliant • Lead Free Solder Processes = Reflow solder capable to 245°C • RoHS/ELV Compliance History = Always was ELV compliant <p>Identification Marking:</p> <ul style="list-style-type: none"> • Stamped Marking = With <p>Other:</p> <ul style="list-style-type: none"> • Series = ASE/F • Brand = Alcoswitch
--	---

Feedback

Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)

Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

Keep Me Informed



