

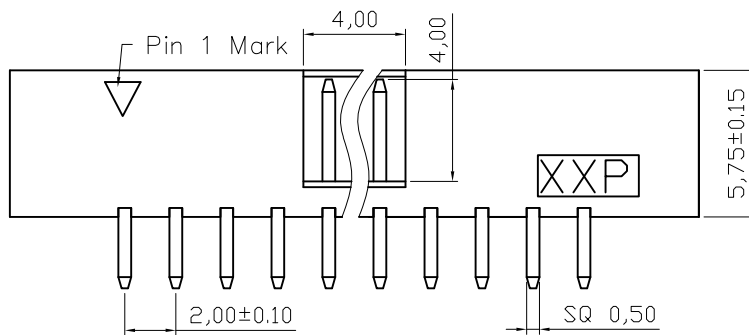


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

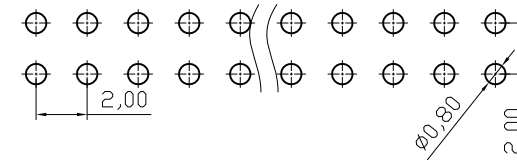

NOTES:

MATERIAL

- 1.Insulator Material:PA6T+30%GF(UL94V-0),Black
- 2.Contact Material : Brass
- 3.Contact Plating : Gold flash Over 50µ"Ni

ELECTRICAL

- 1.Current Rating : 1.5AMP
- 2.Withstand Voltage : 500V AC/DC
- 3.Contact Resistance : 20mΩ max
- 4.Insulation Resistance: 1000MΩ min

ENVIRONMENTAL

- 1.Operation Temperature: -40°C to +105°C
- ④ 2.Packing: Tube

Order Information :

xx: 06,08,10,14,16,20,24,26,30,34,40,44,50,60

RoHS compliant



File No.: E198287 ③

Scale	Free						Date	Name	Customer-No.
TOLERANCE						Drawn	25.01.2006	Alex	ASSMANN WSW-No. AWHW2 xxG-0202
X.X	±0.40	④	Update the packing	24.02.2014	Amy	Approved	24.02.2014	Amy	
X.XX	±0.25	③	Add UL-File No	12.12.2013	Winnie				
X.XXX	±0.15	②	Update	29.06.2009	Dean				
Angle°	±3°	①	Drawn	25.01.2006	Alex				Drawing-No.
									ASS 2317 CO
									rev04
									Replace
									Sheet



1

2

3

4

5

6

7