



RAYCHEM

TE Internal #: 695993-000

SolderSleeve Shield Terminators, 6.9 mm [.272 in] Expanded Inside, 3.18 mm [.125 in] Recovered Inside, Pre-Installed Lead, Splash Protection

[View on TE.com >](#)

Wire Protection & Management > Interconnect Devices > SolderSleeve Shield Terminators



Operating Temperature (Max): 150 °C

Expanded Inside Diameter (Min): 6.9 mm [.272 in]

Recovered Inside Diameter (Max): 3.18 mm [.125 in]

Pre-Installed Lead: **Yes**

Resistance Properties: **Splash Protection**

Features

Product Type Features

Interconnect Device Splice Type	SolderSleeve
---------------------------------	--------------

Configuration Features

Pre-Installed Lead	Yes
--------------------	-----

Dimensions

Product Length	22.1 mm [.87 in]
Expanded Inside Diameter (Min)	6.9 mm [.272 in]
Recovered Inside Diameter (Max)	3.18 mm [.125 in]
Wire Size	24 AWG

Usage Conditions

Operating Temperature (Max)	150 °C
Resistance Properties	Splash Protection
Wire Temperature (Max)	125 °C

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold



EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JUNE 2024 (241)

Candidate List Declared Against: JAN 2024 (240)

SVHC > Threshold:

Pb (37% in Solder)

Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content

Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # EG8162-000
HL1920E-230V-EURO

Customers Also Bought

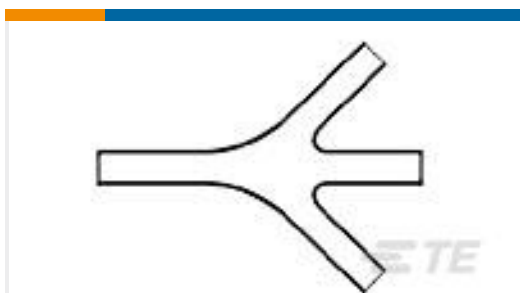

TE Part #811465-000
462A421-50-0




TE Part #2-520084-2
ULTRAFAST 110 ASSY REC 22-18
TPBR LP




TE Part #2562-201-2031L
CONT SOC ASSY



TE Part #2-323680-5
TERMINAL,SOLIS R HT 12-10 10

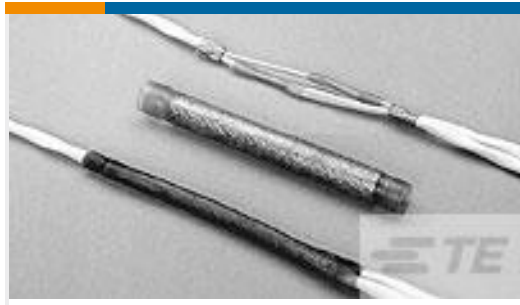

TE Part #522161-000
D-150-0228

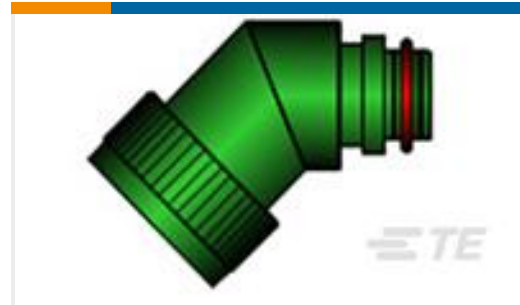

TE Part #782611-000
TXR41SC45-2412AI



TE Part #277151-2
TERMINAL,COPALUM R 1/0 3/8

Documents

Product Drawings

[B-058-02](#)

English

Product Specifications

[Product Specification](#)

English

[Installation Procedure for SolderSleeves B-003-0X, B-058-0X, B-900-0X](#)

English