




Wire Protection & Management > Interconnect Devices > SolderSleeve Shield Terminators

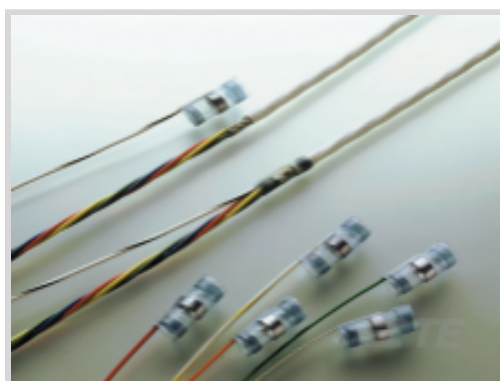

Operating Temperature (Max): 150 °C

Expanded Inside Diameter (Min): 10.41 mm [.409 in]

Recovered Inside Diameter (Max): 3.81 mm [.15 in]

Pre-Installed Lead: **Yes**

Resistance Properties: **Splash Protection**

Features

Product Type Features

| | |
|---------------------------------|--------------|
| Interconnect Device Splice Type | SolderSleeve |
|---------------------------------|--------------|

Configuration Features

| | |
|--------------------|-----|
| Pre-Installed Lead | Yes |
|--------------------|-----|

Dimensions

| | |
|---------------------------------|-------------------|
| Expanded Inside Diameter (Min) | 10.41 mm[.409 in] |
| Recovered Inside Diameter (Max) | 3.81 mm[.15 in] |
| Wire Size | 20 AWG |

Usage Conditions

| | |
|-----------------------------|-------------------|
| Operating Temperature (Max) | 150 °C |
| Resistance Properties | Splash Protection |

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

| | |
|---|--------------------------------------|
| EU RoHS Directive 2011/65/EU | Not Compliant |
| EU ELV Directive 2000/53/EC | Not Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | |



Current ECHA Candidate List: JUNE 2023 (235)

Candidate List Declared Against: JUNE 2023 (235)

SVHC > Threshold:

Pb (37% in Solder)

Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content

Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Customers Also Bought



TE Part #326882
TERMINAL,PIDG R 16-14 6




TE Part #165046
PIDG WIRE PIN



TE Part #52934
TERMINAL,PIDG SPR SPD 16-14 5



TE Part #47387
DAHT PG PIDG 20-14 ASSY

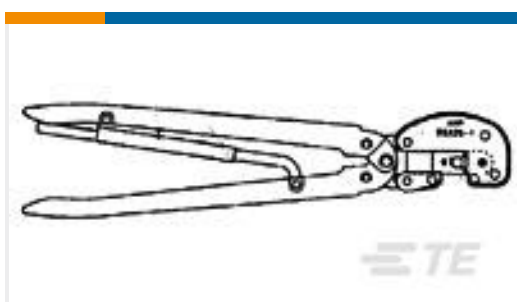


TE Part #59239-4
HHHT PIDG PG 12-10 ASSY



TE Part #52041-3
TERMINAL,R PG 8 1/4



TE Part #4611264003
ZHTM-24/12-0-SP

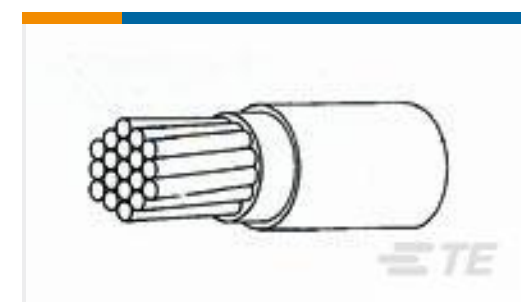

TE Part #2836883001
44A0211-20-5



Documents

Product Drawings

[B-900-22](#)

English

Datasheets & Catalog Pages

[Raychem Electrical Interconnect Products](#)

English

Product Specifications

[Product Specification](#)

English

[Installation Procedure for SolderSleeves B-003-0X, B-058-0X, B-900-0X](#)

English