



SAW Components

Data Sheet X 6941 D

Data Sheet

An abstract, grayscale graphic featuring a globe with a grid of latitude and longitude lines. Overlaid on the globe is a large, stylized, 3D-effect word "EPCOS" in a light gray color. The word is tilted and appears to be floating or attached to the globe's surface. The overall image has a dark, moody atmosphere with soft lighting effects.

EPCOS



SAW Components

X 6941 D

Bandpass Filter

44,00 MHz

Data Sheet


Standard

Duroplast package **SIP5D**

- HDTV

Features

- Constant group delay
- Optimized for cascade of two devices
- Optimized for balanced to balanced operation
- Standard IC package

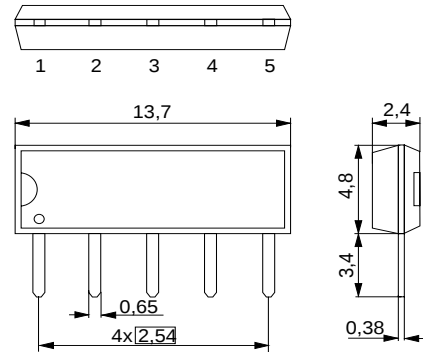


Terminals

- Tinned CuFe alloy

Dimensions in mm, approx. weight 0,5 g

Pin configuration

- 1 Input
- 2 Input
- 3 Chip carrier - ground
- 4 Output
- 5 Output



Type	Ordering code	Marking and package according to	Packing according to
X 6941 D	B39440-X6941-N201	C61157-A1-A21	F61074-V8049-Z000

Maximum ratings

Operable temperature range	T_A	-25/+65	°C	
Storage temperature range	T_{stg}	-40/+85	°C	
DC voltage	V_{DC}	5	V	between any terminals
AC voltage	V_{pp}	10	V	between any terminals



SAW Components

X 6941 D

Bandpass Filter

44,00 MHz

Data Sheet

Characteristics

Reference temperature:

$$T_A = 25^\circ \text{C}$$

Terminating source impedance:


$$Z_S = 50 \Omega$$

Terminating load impedance:

$$Z_L = 2 \text{ k}\Omega \parallel 3 \text{ pF and matching network}$$

			min.	typ.	max.	
Insertion attenuation α						
Reference level for the following data	44,00 MHz		18,5	20,0	21,5	dB
Amplitude ripple (p-p) $\Delta\alpha$						
	41,60 ... 46,40 MHz		—	0,4	—	dB
Relative attenuation α_{rel}						
	40,75 MHz		25,0	32,0	—	dB
	41,31 MHz		1,1	1,6	2,1	dB
	41,43 MHz		-0,4	0,3	1,0	dB
	41,60 MHz		-0,4	0,1	0,6	dB
	46,40 MHz		-0,4	0,1	0,6	dB
	46,57 MHz		0,1	0,6	1,1	dB
	46,69 MHz		1,5	2,0	2,5	dB
	47,25 MHz		25,0	36,0	—	dB
Lower sidelobe	35,00 ... 39,10 MHz		34,0	42,0	—	dB
	39,10 ... 40,35 MHz		27,0	32,0	—	dB
Upper sidelobe	47,65 ... 48,65 MHz		25,0	30,0	—	dB
	48,65 ... 55,00 MHz		32,0	37,0	—	dB
Reflected wave signal suppression						
1,5 μs ... 6,0 μs after main pulse (test pulse 250 ns, carrier frequency 44,00 MHz)			42,0	56,0	—	dB
Group delay ripple (p-p) $\Delta\tau$						
	41,31 ... 46,69 MHz		—	30	80	ns
Impedance at 44,00 MHz						
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$			—	1,9 $\parallel$ 22,2	—	k Ω $\parallel$ pF
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$			—	6,1 $\parallel$ 5,7	—	k Ω $\parallel$ pF
Temperature coefficient of frequency TC_f						
			—	-18	—	ppm/K

Matching network:

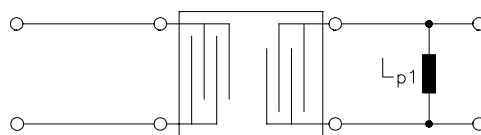

$$L_{p1} = 1800 \text{ nH}$$



SAW Components



X 6941 D

Bandpass Filter

44,00 MHz

Data Sheet

Frequency response

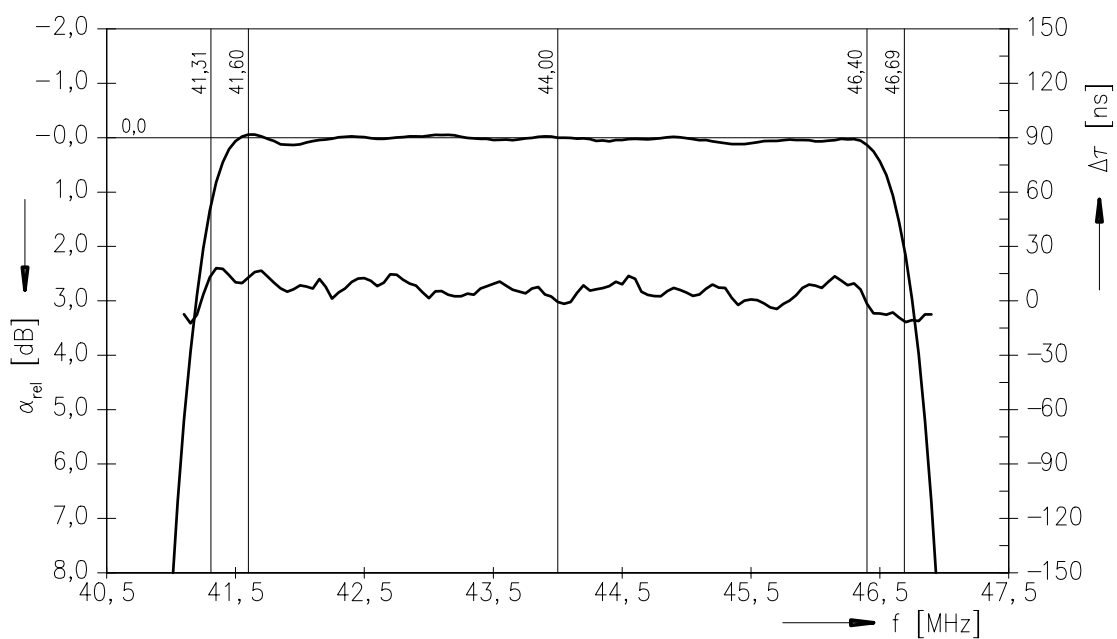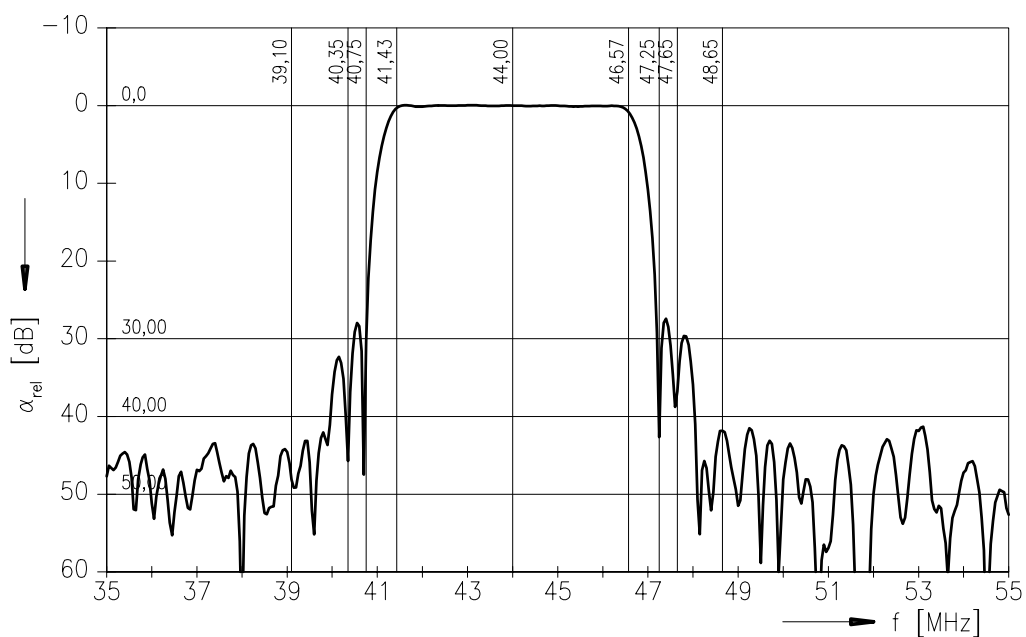



SAW Components


X 6941 D

Bandpass Filter


44,00 MHz

Data Sheet

Frequency response

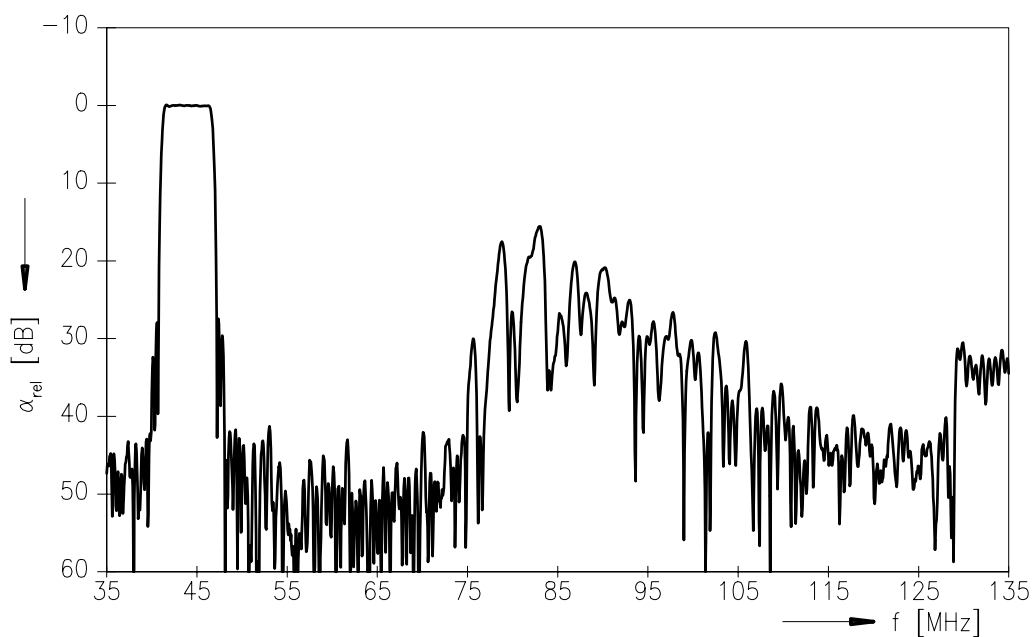

Time domain response

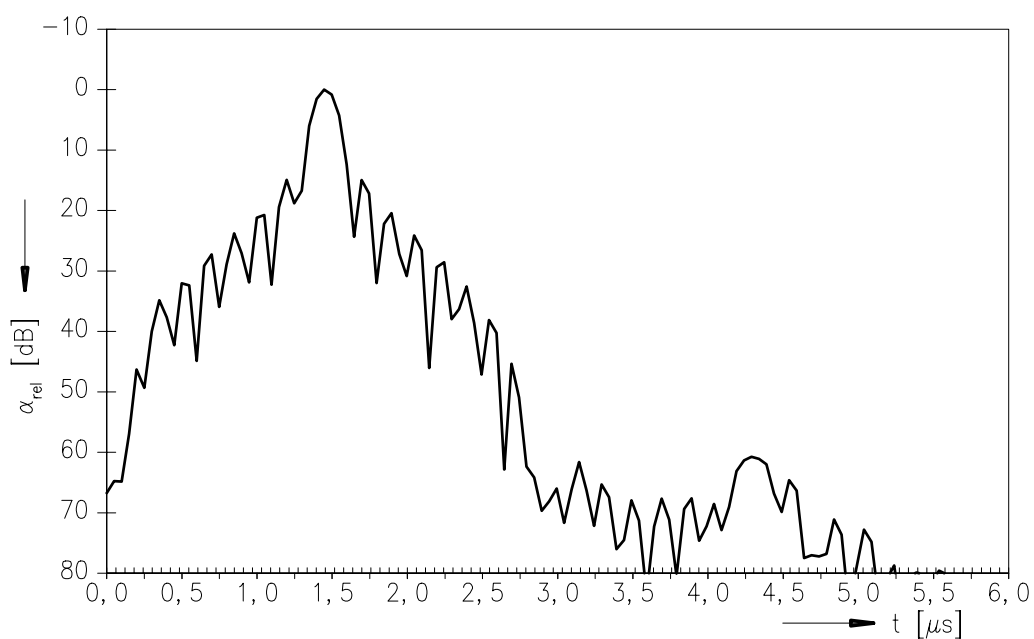



SAW Components	X 6941 D
Bandpass Filter	44,00 MHz

Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW CE MM PD

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2003. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.