

4MT5
(CYJV CABLE ASSEMBLY)



Basic features

Approval/Conformity	cULus EAC WEEE
---------------------	----------------------

Electrical connection

Cable	PVC Shielded gray, 10.00 m
Cable diameter D	5.40 mm \pm 0.10 mm
Conductor cross-section	0.34 mm ²
Connection	M12x1-Female, right-angle, 5-pin, A-coded
Connector configuration	right-angle
Number of conductors	4
Number of pins	5
System	Molded

Electrical data

Operating voltage U _b	250 VDC / 250 VAC
Rated current (40 °C)	4.0 A

Environmental conditions

Cable temperature UL max., fixed routing	80 °C
Cable temperature, fixed routing	-20...105 °C
Protection degree	IP67

Material

Cable jacket material, note	Shielded
Cable jacket, material	PVC
Cable shield	Copper braid, tin-plated
Material contact carrier	PUR
Material contacts	Bronze
Material cover nut	Brass nickel plates
Material grip	PUR

Mechanical data

Cable jacket, color	gray
Cable length L	10.00 m
Tightening torque pigtail	0.6 Nm


Output/Interface

Switching output	Complementary
------------------	---------------

Remarks


Cable construction acc. to UL-AWM Style 2517
 Silicone-free
 Flame resistance acc. to FT1
 Enclosure rating per IEC 60529, only in screwed state with the associated mating piece.

Connector Drawings



PIN 1: brown
PIN 2: white
PIN 3: blue
PIN 4: black

Wiring Diagrams

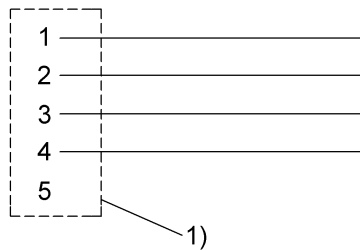

1) Shield on cover nut