


LTR	REVISION	DATE	APPD
B	052018-GP02: UPDATED TEST DATA	06-29-18	GP

BF3126-SIW-014B

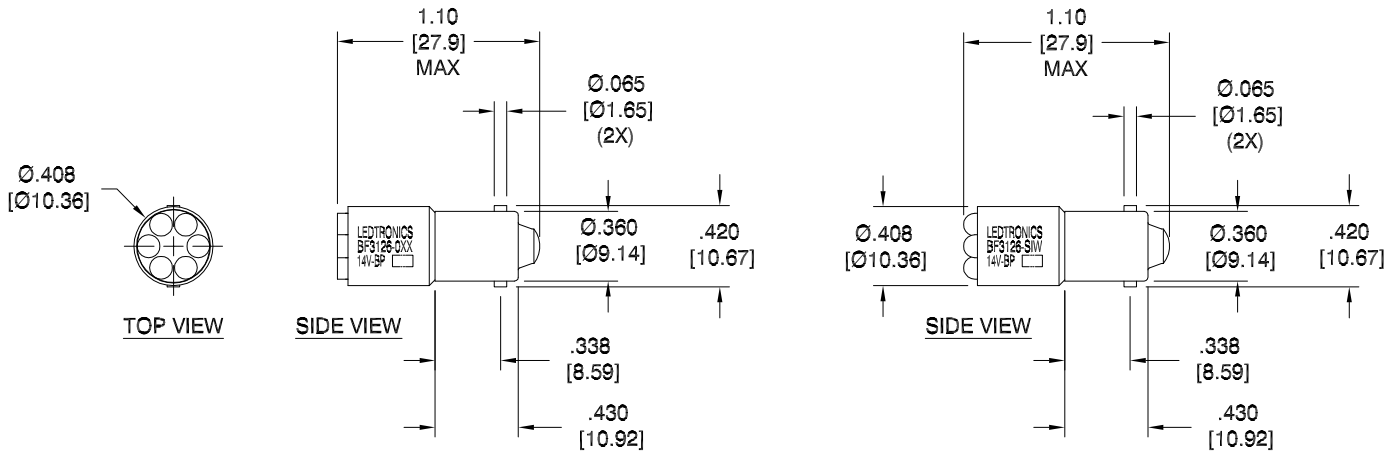

NOTES:

1. ALL DIMENSIONS ARE IN INCHES (MILLIMETERS).
2. SLEEVE MATERIAL: RYNITE FR530 (UL94V-1 MINIMUM, UL94V-0 PREFERRED)
3. BASE MATERIAL: (BODY) BRASS & NICKEL-PLATED BRASS (BARREL)
4. OPERATING TEMPERATURE: ~-30°C to ~+50°C

REVISION NOTIFICATION	
<input type="checkbox"/>	DLC
<input type="checkbox"/>	UL/ETL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER
REDLINE CHECKLIST	
<input type="checkbox"/>	REDLINE(YES)
<input type="checkbox"/>	DATE: _____
<input type="checkbox"/>	INITIATED BY: _____
<input type="checkbox"/>	ECR REQUIRED YES <input type="checkbox"/> NO <input type="checkbox"/>
<input type="checkbox"/>	WORK ORDER# _____

ELECTRICAL - OPTICAL CHARACTERISTICS (Ta = 25°C)

BF3126-OAG-014B	AQUA GREEN	12/14Vdc(@14Vdc)	0.34 W	0.024 A	5.400cd	520	-	105°
BF3126-OCW-014B	COOL WHITE	12/14Vdc(@14Vdc)	0.34 W	0.024 A	8.640cd	-	8000K	105°
BF3126-OUR-014B	ULTRA RED	12/14Vdc(@14Vdc)	0.42 W	0.030 A	0.450cd	654	-	105°
BF3126-OUY-014B	SUPER YELLOW	12/14Vdc(@14Vdc)	0.42 W	0.030 A	1.012cd	593	-	120°
BF3126-SIW-014B	WARM WHITE	12/14Vdc(@14Vdc)	0.32 W	0.023 A	9.000cd	-	3000K	85°
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	λ P nm	COLOR TEMP. (K)	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)

<p>LEDTRONICS,™ INC. 23105 KASHIWA COURT TORRANCE, CA 90505</p>	<p>-PROPRIETARY- This document contains Proprietary information of LEDTRONICS,™ INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS,™ INC.</p>		<p>TITLE BF3126-XXX-014B</p>								
	<p>.XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0°,30' FRACT. ± 1/32</p>		<p>DWG NO BF3126-14V-BP</p>		<p>SCALE 1:1</p>		<p>SHEET 1 OF 1</p>		<p>DATE 10-09-12</p>		
	<p>CODE IDENT NO. 8Z410</p>		<p>DWG BY GP 10-09-12</p>		<p>CHK BY</p>		<p>QA EE 07-09-18</p>		<p>MFG LD 07-09-18</p>		<p>R&D KS 07-09-18</p>