


LTR	REVISION	DATE	APPD
A	052018-GP02: UPDATED TEST DATA	06-29-18	GP

BF3126-SIW-024B

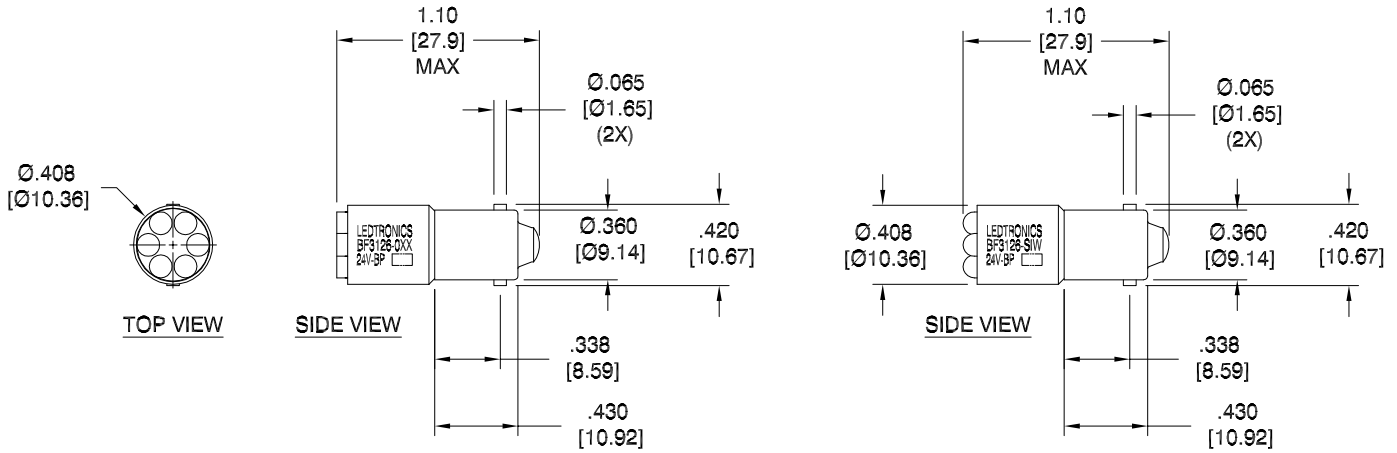

NOTES:

1. ALL DIMENSIONS ARE IN INCHES (MILLIMETERS).
2. SLEEVE MATERIAL: RYNITE FR530 (UL94V-1 MINIMUM, UL94V-0 PREFERRED)
3. BASE MATERIAL: (BODY) BRASS & NICKEL-PLATED BRASS (BARREL)
4. OPERATING TEMPERATURE: ~-30°C to ~+50°C

REVISION NOTIFICATION	
<input type="checkbox"/> DLC	
<input type="checkbox"/> UL/ETL	
<input type="checkbox"/> MADE IN USA	
<input type="checkbox"/> CUSTOMER _____	
<input type="checkbox"/> OTHER	
REDLINE CHECKLIST	
<input type="checkbox"/> REDLINE(YES)	
<input type="checkbox"/> DATE: _____	
<input type="checkbox"/> INITIATED BY: _____	
<input type="checkbox"/> ECR REQUIRED YES <input type="checkbox"/> NO <input type="checkbox"/>	
<input type="checkbox"/> WORK ORDER# _____	

ELECTRICAL - OPTICAL CHARACTERISTICS (Ta = 25°C)

BF3126-0AG-024B	AQUA GREEN	24Vdc	0.50 W	0.021 A	9.450cd	520	-	105°
BF3126-0CW-024B	COOL WHITE	24Vdc	0.41 W	0.017 A	12.240cd	-	8000K	105°
BF3126-0PB-024B	SUPER BLUE	24Vdc	0.43 W	0.018 A	1.890cd	465	-	110°
BF3126-SIW-024B	WARM WHITE	24Vdc	0.36 W	0.015 A	11.250cd	-	3000K	85°
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	λ P nm	COLOR TEMP. (K)	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)

LEDTRONICS,™ INC.
23105 KASHIWA COURT
TORRANCE, CA 90505

-PROPRIETARY-
This document contains Proprietary information of LEDTRONICS,™ INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS,™ INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°,30'
FRACT. ± 1/32

TITLE							
BF3126-XXX-024B							
DWG NO	SCALE	SHEET	DATE				
BF3126-24V-BP	1:1	1 OF 1	02-11-15				
CODE IDENT NO.	DWG BY	CHK BY	QA	EE	MFG LD	R&D	KS
8Z410	02-11-15		07-09-18	07-09-18	07-09-18	07-09-18	