


LTR	REVISION	DATE	APPD
B	051718-GP01: UPDATED TEST DATA	06-15-18	GP

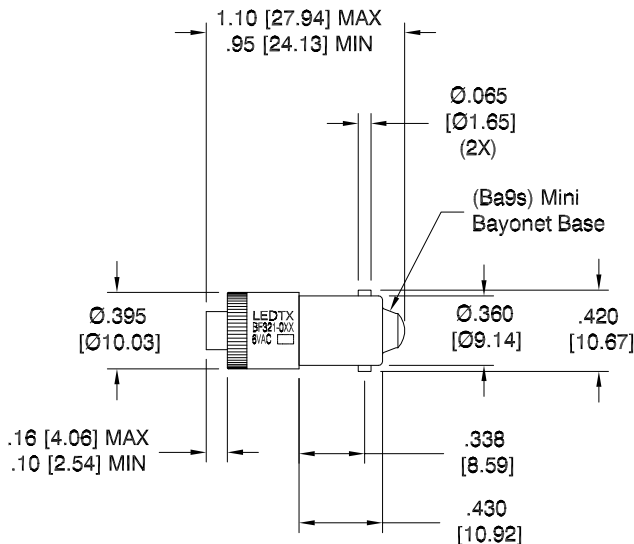

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: GENERAL POLYMERS RYNITE FR530 (UL 94HB)
3. BASE MATERIAL: (BODY) BRASS & NICKEL PLATED BRASS (BARREL)
4. OPERATING TEMPERATURE: ~-30°C TO ~+50°C

**FULL BEAM WIDTH @ 50% INTENSITY

REVISION NOTIFICATION	
<input type="checkbox"/> DLC	
<input type="checkbox"/> UL/ETL	
<input type="checkbox"/> MADE IN USA	
<input type="checkbox"/> CUSTOMER _____	
<input type="checkbox"/> OTHER _____	
REDLINE CHECKLIST	
<input type="checkbox"/> REDLINE(YES)	
<input type="checkbox"/> DATE: _____	
<input type="checkbox"/> INITIATED BY: _____	
<input type="checkbox"/> ECR REQUIRED YES <input type="checkbox"/> NO <input type="checkbox"/>	
<input type="checkbox"/> WORK ORDER# _____	

ELECTRICAL - OPTICAL CHARACTERISTICS (Ta = 25°C)

BF321-0AG-006A	AQUA GREEN	6Vac	0.09 W	0.015 A	1.650cd	520	-	85°	AC Voltage
BF321-0CW-006A	COOL WHITE	6Vac	0.08 W	0.014 A	2.327cd	-	8000K	95°	AC Voltage
BF321-0UO-006A	SUPER ORANGE	6Vac	0.09 W	0.019 A	0.214cd	610	-	95°	AC Voltage
BF321-0UR-006A	ULTRA RED	6Vac	0.09 W	0.019 A	0.142cd	652	-	80°	AC Voltage

LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	λP nm	COLOR TEMP. (Kelvin)	VIEWING ANGLE**	CENTER CONTACT POLARITY
---------------------	---------------	------------------	-----------	-------------	-----------------	-------	----------------------	-----------------	-------------------------

<p>LEDTRONICS,™ INC. 23105 KASHIWA COURT TORRANCE, CA 90505</p>	<p>-PROPRIETARY- This document contains Proprietary information of LEDTRONICS,™ INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS,™ INC.</p>		<p>TITLE BF321-0XX-006A</p>								
	<p>DWG NO BF321-6VAC</p>		<p>SCALE 1:1</p>		<p>SHEET 1 OF 1</p>		<p>DATE 10-17-11</p>				
	<p>CODE IDENT NO. 8Z410</p>		<p>DWG BY MM 10-17-11</p>		<p>CHK BY</p>		<p>QA EE 06-21-18</p>		<p>MFG LD 06-21-18</p>		<p>R&D KS 06-21-18</p>

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°.30'
FRACT. ± 1/32