


LTR	REVISION	DATE	APPD
-	RELEASED	04-15-16	

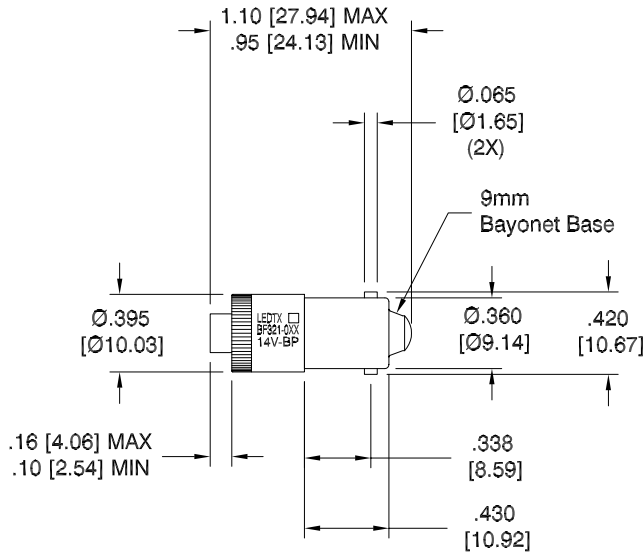

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: GENERAL POLYMERS RYNITE FR530 (UL 94HB)
3. BASE MATERIAL: BRASS, NICKEL-PLATED
4. OPERATING TEMPERATURE: ~-30°C TO ~+50°C

**FULL BEAM WIDTH @ 50% INTENSITY



ELECTRICAL - OPTICAL CHARACTERISTICS (Ta = 25°C)

REVISION NOTIFICATION	
<input type="checkbox"/>	DLC
<input type="checkbox"/>	UL/ETL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER

BF321-0AG-014B	AQUA GREEN	12/14Vdc	0.24 W	0.017A@14Vdc	0.400cd	520	-	85°	BipolarDC(+/-)
BF321-0CW-014B	COOL WHITE	12/14Vdc	0.24 W	0.017A@14Vdc	0.825cd	-	8000K	95°	BipolarDC(+/-)
BF321-0IW-014B	WARM WHITE	12/14Vdc	0.24 W	0.017A@14Vdc	0.130cd	-	3000K	110°	BipolarDC(+/-)
BF321-0PB-014B	SUPER BLUE	12/14Vdc	0.24 W	0.017A@14Vdc	0.116cd	465	-	85°	BipolarDC(+/-)
BF321-0UG-014B	SUPER GREEN	12/14Vdc	0.27 W	0.019A@14Vdc	0.058cd	573	-	90°	BipolarDC(+/-)
BF321-0UO-014B	SUPER ORANGE	12/14Vdc	-	0.019A@14Vdc	-	610	-	95°	BipolarDC(+/-)
BF321-0UR-014B	ULTRA RED	12/14Vdc	0.27 W	0.019A@14Vdc	0.115cd	652	-	80°	BipolarDC(+/-)
BF321-0UY-014B	SUPER YELLOW	12/14Vdc	0.27 W	0.019A@14Vdc	0.116cd	593	-	85°	BipolarDC(+/-)
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	λ P nm	COLOR TEMP. (Kelvin)	VIEWING ANGLE**	CENTER CONTACT POLARITY



-PROPRIETARY-
 This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
 .XX ± .025 (UNLESS OTHERWISE STATED)
 ANGLES ± 0°,30'
 FRACT. ± 1/32

TITLE					
BF321-0XX-014B					
DWG NO	SCALE	SHEET	DATE		
BF321-14V-BP	1:1	1 OF 1	04-15-16		
CODE IDENT NO.	DWG BY	CHK BY	QA	MFG	R&D
8Z410	GP 04-15-16		JH 06-01-16	LD 06-01-16	LUV 05-31-16