


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

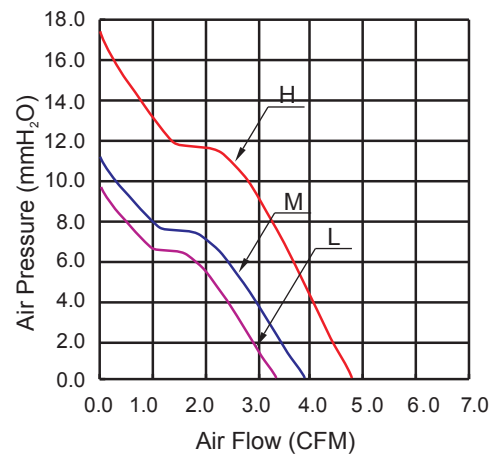

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
BF6015L12S	Sleeve	12V	0.12	1.44	3,000 ± 10%	3.21	9.12	28.0	60 X 60 X 15
BF6015M12S	Sleeve	12V	0.20	2.40	4,000 ± 10%	3.85	11.50	33.0	60 X 60 X 15
BF6015H12S	Sleeve	12V	0.25	3.00	4,800 ± 10%	4.81	17.90	37.5	60 X 60 X 15
BF6015L24S	Sleeve	24V	0.007	1.68	3,000 ± 10%	3.21	9.12	28.0	60 X 60 X 15
BF6015M24S	Sleeve	24V	0.12	2.88	4,000 ± 10%	3.85	11.50	33.0	60 X 60 X 15
BF6015H24S	Sleeve	24V	0.20	4.80	4,800 ± 10%	4.81	17.90	37.5	60 X 60 X 15