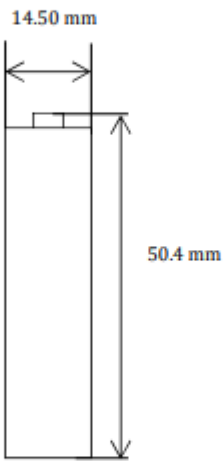


Panasonic

Cell Type BK-3HCDE

To PECE

Specifications


		
Dimensions (with Label)	D	14.50 mm
	H	50.4 mm

Type : Nickel-Metal Hydride Battery			Size : AA Consumer Type
Country of origin			Japan
Capacity ¹⁾	Minimum		2500mAh
Nominal Voltage			1.2V
Charging Current x Time		Fast Charge ²⁾	1250mA X 2.2h
Ambient Temp.	Charge Condition	Fast Charge ²⁾	0°C - 40°C
	Discharge Condition		0°C - 50°C
	Storage Condition	Less than 90days	-20°C - 40°C
		Less than 1year	-20°C - 35°C
Internal Impedance ³⁾ (after discharge to E.V.=1.0V)			Approx. 40m Ω (at 1KHz)
Weight ⁴⁾			Approx. 30 g
Size ⁴⁾ :(Diameter) x (Height)			φ :14.5mm X H:50.4mm

- 1) Single cell capacity under the following condition.
Charge: 250mA x 16h, Discharge: 500mA (E.V.
=1.0V) at 25deg.C
2) Use recommended charging system.
3) After a few charge and discharge cycles under
the above 1) condition. 4) With Label.



Charge Characteristics

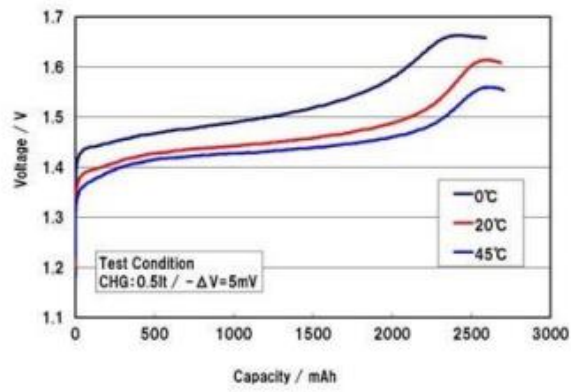

Discharge Characteristics

