

BLM03EB250SH1#


“#” indicates a package specification code.



< List of part numbers with package codes >

BLM03EB250SH1D BLM03EB250SH1J BLM03EB250SH1B

Appearance & Shape

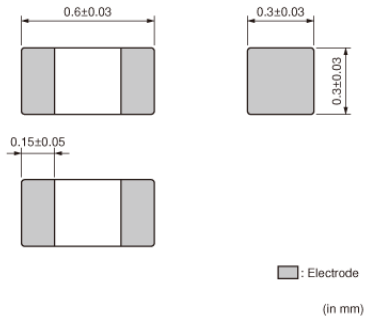

Features

1. Horizontal winding inner coil structure enables low storage capacitance which result to high noise suppression performance. Effective in LTE range up to 2.6GHz from 700MHz.
2. Low DC Resistance. Large Rated Current.
3. The small size of BLM03E series (0.6x0.3mm) is suitable for noise suppression in small equipment such as cellular phones.

Applications

Automotive Usage	Powertrain/Safety
------------------	-------------------

Packaging Information

Packaging	Specifications	Minimum Order Quantity
D	180mm Paper Tape	15000
J	330mm Paper Tape	50000
B	Bulk(Bag)	1000

Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

BLM03EB250SH1#

“#” indicates a package specification code.



Specifications

Shape	SMD	Mass(typ.)	0.3mg
Size Code (in mm)	0603	Number of Circuit	1
Size Code (in inch)	0201		
Length	0.6mm		
Length Tolerance	±0.03mm		
Width	0.3mm		
Width Tolerance	±0.03mm		
Thickness	0.3mm		
Thickness Tolerance	±0.03mm		
Impedance (at 100MHz)	25Ω		
Impedance (at 100MHz) Tolerance	±25%		
Impedance (at 1GHz)	105Ω		
Impedance (at 1GHz) Tolerance	±40%		
Rated Current (at 85°C)	600mA		
Rated Current (at 125°C)	450mA		
DC Resistance(max.)	0.26Ω		
Operating Temperature Range	-55°C to 125°C		

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

BLM03EB250SH1#

“#” indicates a package specification code.


Product Data

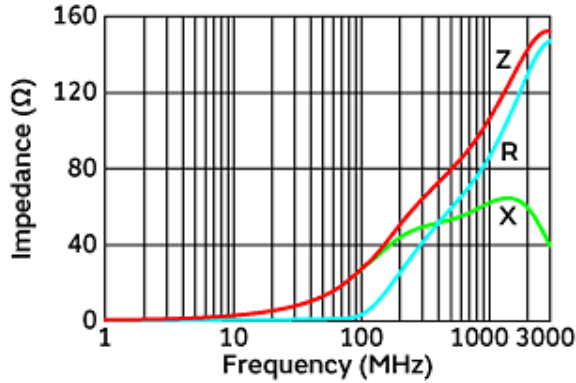

Impedance-Frequency Characteristics

In operating temperature exceeding +85°C, derating of current is necessary for BLM03E series. Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

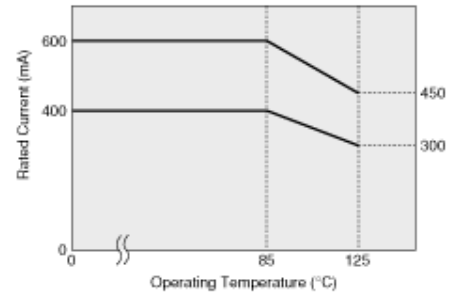

Derating of Rated Current



Equivalent Circuit

Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.