


BNI PNT-507-005-Z040  
BNI0092

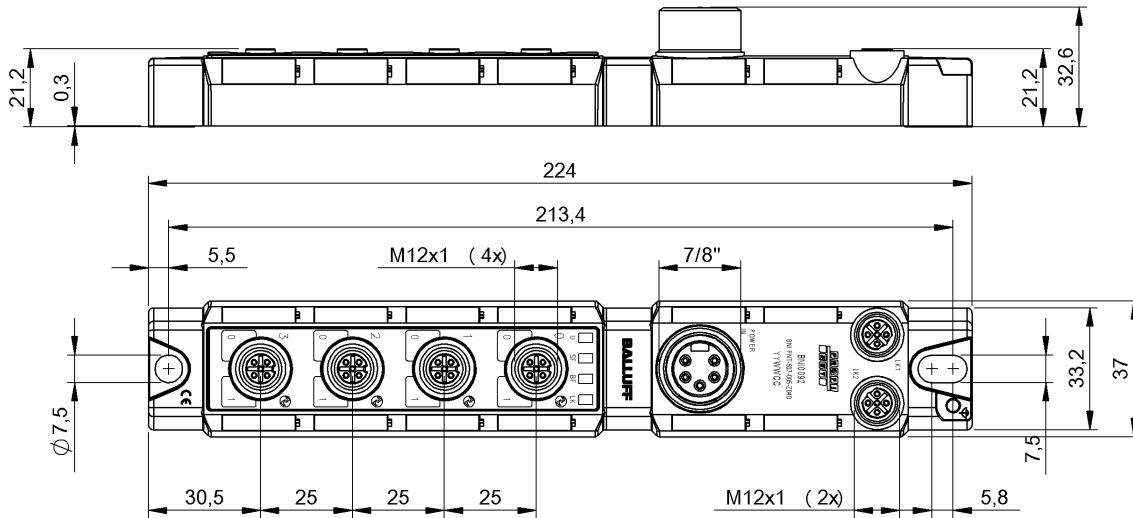

## Display/Operation

Actuator supply UA, indicator	LED green
IO-Link communication indicator	LED green
Sensor supply US indicator	LED green
Switching function display	LED yellow

## Electrical connection

Contact, surface protection	nickel plated 2 µm/gold plated 0.4 µm
-----------------------------	---------------------------------------

## Electrical data

Address range	IPV4
Configurable inputs/outputs	yes
Current sum UA, actuator	9.0 A
Current sum US, sensor	9.0 A
IO-Link function	Master
MTTF (40 °C)	48 a
Operating voltage Ub	18...30.2 VDC
Output current max.	2 A
Rated operating voltage Ue DC	24 V
Transfer rate	10...100 Mbit/s

## Environmental conditions

Ambient temperature	-5...70 °C
EN 60068-2-6, Vibration	5...61 Hz, constant amplitude 1 mm 61...500 Hz, constant acceleration 15 g
Protection type IEC 60529	IP67 when threaded in
Storage temperature	-25...70 °C

## Functional safety

Functional safety	no
Mission Time	20 a

## General data

Approval/Conformity	CE
Scope of delivery	Part label (20x) Blind plugs M12 (4x) Ground strap Lock washer Short guide M4x6 screw
Style	single-row

## Material

Gasket, material	FKM 75
Housing material	Zinc, Die casting
Housing shield	yes
Surface protection	Cu 15 µ Ni 15 µ

## Mechanical data

Dimension	37 x 32.6 x 224 mm
Fastening detail	2-hole screw mount
Mounting ground strap	M4

## Output/Interface

Auxiliary interfaces	4x IO-Link
Auxiliary interfaces, number	4x IO-Link
Digital inputs	8x PNP, Type 2
Digital outputs	8x PNP
Interface	Profinet I/O

## BNI PNT-507-005-Z040 BNI0092

IO-Link version 1.1


For further information on MTTF/B10d, please refer to the MTTF / B10d Certificate.

### Remarks


Specification of the MTTF value and the B10d value do not represent any binding quality and/or life expectancy guarantees.

Installation instructions See short guide


### Connector view



PIN 1: 0V PIN 2: 0V PIN 3: Function ground PIN 4: Sensor and bus supply. PIN 5: Actuator supply Power IN



PIN 1: TD+ PIN 2: RD+ PIN 3: TD- PIN 4: RD- Profinet Port



IO-Link PIN 1: +24V, 1.6A PIN 2: In-/output/Diagnostics PIN 3: 0V PIN 4: IO-Link/In-/output PIN 5: n.c.