



LTR	REVISION	DATE	APPD
-	RELEASED	01-02-20	



ROTATED 90°

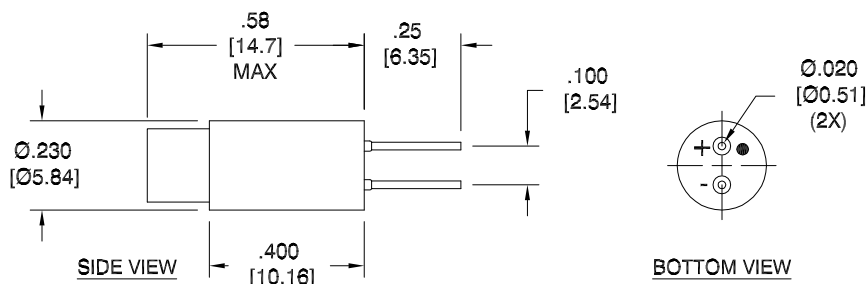

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: RYNITE
3. TERMINAL MATERIAL: NICKEL TYPE 200, 1/2 HARD TEMPERED
FINISH: BRIGHT TIN-LEAD (60-40) PLATE PER MIL-P-81728, TYPE I (.0003" TO .0005" THICK)
4. REPLACES INCANDESCENT: 7328
5. OPERATING TEMPERATURE: ~-30°C to ~+50°C

REVISION NOTIFICATION	
<input type="checkbox"/>	DLC
<input type="checkbox"/>	UL/ETL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER _____
REDLINE CHECKLIST	
<input type="checkbox"/>	REDLINE(YES)
<input type="checkbox"/>	DATE: _____
<input type="checkbox"/>	INITIATED BY: _____
<input type="checkbox"/>	ECR REQUIRED YES <input type="checkbox"/> NO <input type="checkbox"/>
<input type="checkbox"/>	WORK ORDER# _____

ELECTRICAL-OPTICAL CHARACTERISTICS (Ta = 25°C)

BPF200-0AG-005V	AQUA GREEN	5Vdc	0.1 W	0.019 A	1434 mcd	0.48	6.10 lm	523nm	85°
BPF200-0CW-005V	COOL WHITE	5Vdc	0.1 W	0.019 A	1965 mcd	0.61	7.77 lm	8000K	95°
BPF200-0UY-005V	SUPER YELLOW	5Vdc	0.1 W	0.021 A	348 mcd	0.08	1.00 lm	596nm	80°
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	LUMINOUS INTENSITY	SCP	TOTAL LUMENS	λP nm COLOR TEMP. (K)	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)

LEDTRONICS, INC.
23105 KASHIWA COURT
TORRANCE, CA 90505

-PROPRIETARY-
This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°,30'
FRACT. ± 1/32

TITLE							
BPF200-0XX-005V							
DWG NO	SCALE	SHEET	DATE				
BPF200-5V-DC	2:1	1 OF 1	01-02-20				
CODE IDENT NO.	DWG BY GP	CHK BY	QA LUV	MFG LD	R&D UF		
8Z410	01-02-20		01-06-20	01-06-20	01-03-20		