


Accessories
Actuation kit (puck)
BTS-DSU35-EBE3-US2

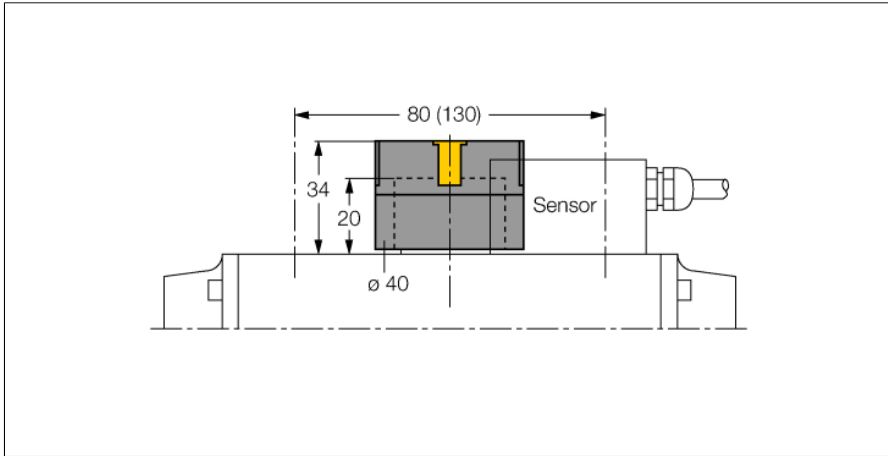

- End position damped
- 6.2 mm stainless steel target to compensate larger tolerances (eg. caused by rubber seals)
- End position (open/closed) freely adjustable 360°, in steps of 4°
- Displays rotatable by 90°
- Scale division
- Hole pattern on flange surface: 30 x 80 mm (30 x 130 mm)
- Connection shaft (shaft extension) height: 20 mm/Ø: max. 30 mm
- Mounting screws with US thread for sensor and actuator are included

Type	BTS-DSU35-EBE3-US2
ID	6901079
Design	Accessories for dual sensors, Ni4-DSU35...
Housing material	Plastic, ABS
Tightening torque	≤ 1.5 Nm
Included in delivery	2x cylinder screw 10x24 UNC 0.5" 2x lock washers #10 1x countersunk screw M6x25 (DIN 7991-A2)

General description

Dual sensors are especially designed for position detection in rotary actuators. They combine the reliability of non-contact inductive sensors with the flexibility of a modular housing system. A broad range of practice-oriented accessories ensure optimal adaption to your system.

