


REVISIONS	
A	CO-73287M
	GJW
16	MAY 95

[illegible]


FORMTEK
DRAWN

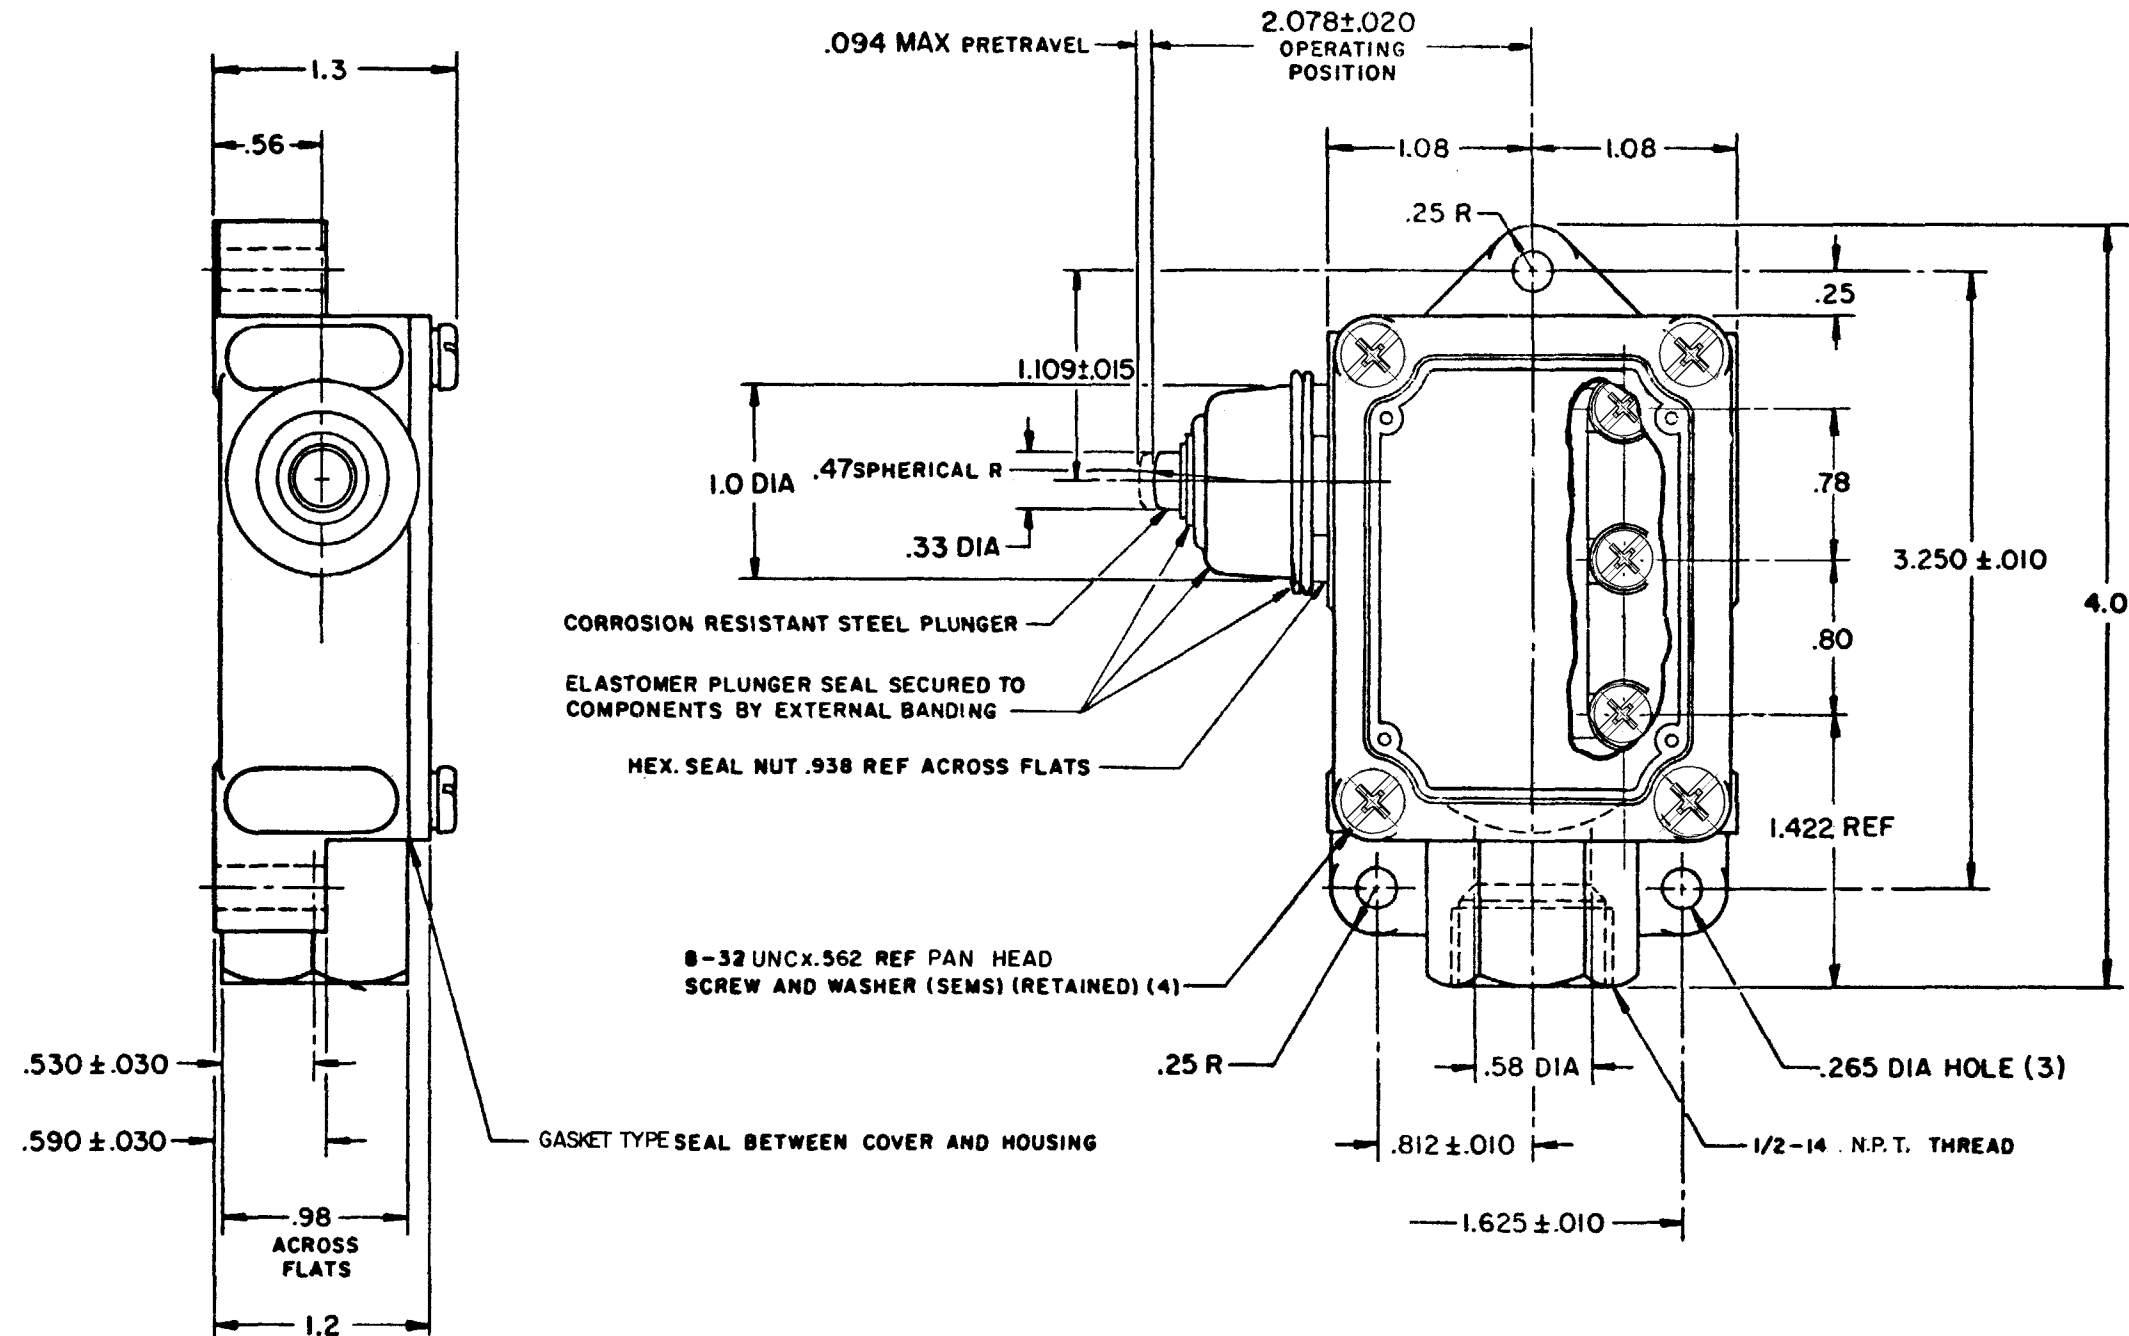

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF
HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE ----- 2 LB MAX	CONTACT ARRANGEMENT S P D T
RELEASE FORCE ----- 1/2 LB MIN	-L96- 15 A-125, <u>250</u> , OR 480 VAC
DIFFERENTIAL TRAVEL ---- .004 MAX	1/2 A-125 VDC ; 1/4 A - 250 VDC
OVERTRAVEL ----- .219 MIN	1/8 HP-125 VAC ; 1/4 HP- <u>250</u> VAC
BASIC SWITCH REPLACEMENT BZ-2R708-P7	 

THIRD ANGLE PROJECTION



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE	(.01)	$\pm .030$
TWO PLACE	(.00)	$\pm .015$
THREE PLACE	(.000)	$\pm .005$
ANGLES		$\pm$

WEIGHT .500 LB

NOTE

1 - 8-32 UNC X (.219) BINDER HEAD,COMBINATION , TERMINAL SCREWS
AND CUPWASHERS (SEMS) (3)