


C062C563K1R5TA

aka C062C563K1R5TA

Capacitor, ceramic, 0.056 uF, +/-10% Tol, 100V, X7R, Lead Spacing=0.2"

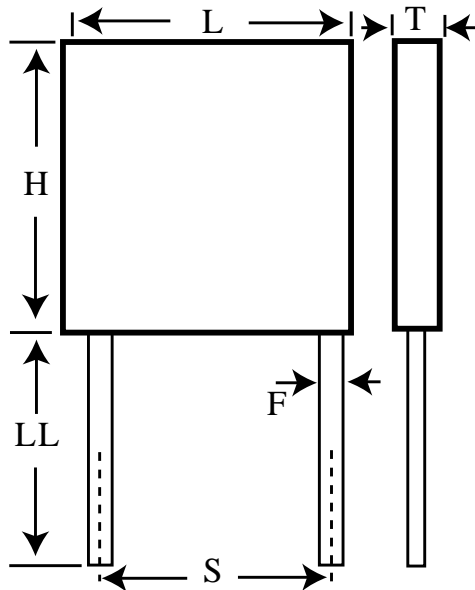

Dimensions (in)

Specifications

ID	Dimension	Tolerance	Manufacturer:	KEMET
L	0.29	+/-0.01	Capacitance:	0.056 uF
H	0.29	+/-0.01	Lead Spacing:	0.2"
S	0.2	+/-0.03	Voltage:	100V
LL	1.25	min	Temperature Coefficient:	X7R
F	0.025	+0.004/-0.002	Tolerance:	+/-10%
K	0.025		Body Type:	Radial Molded
			Lead Type:	Standard Leads
			Lead Form:	Straight Leads
			Termination Type:	Tin
			Package Kind:	Bulk
			Package Type:	Bag
			Package Quantity:	100

Notes:

-Note A: Center line of the leads will be within 0.03 in [0.76 mm] of the center line of the body.

-Lead length shown is for parts supplied in bulk. See packaging specifications for lead lengths when not provided in bulk