


Ceramic, MoldedStandard, 0.01 uF, 10%, 50 V, X7R

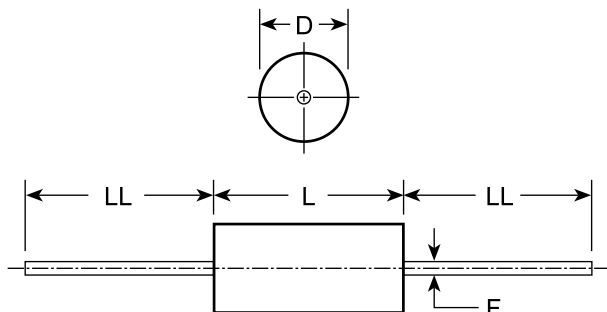

Dimensions

D	2.29mm +/-0.25mm
L	4.06mm +/-0.25mm
LL	38.1mm MIN
F	0.51mm -0.08mm

Packaging Specifications

Packaging:	Bulk, Bag
Packaging Quantity:	200

General Information

Series:	MoldedStandard
RoHS:	No
Termination:	Lead (SnPb)
Failure Rate:	N/A
Notes:	Lead Length Shown Is For Parts Supplied In Bulk, See Packaging Specifications For Lead Lengths When Not Provided In Bulk

Specifications

Capacitance:	0.01 uF
Capacitance Tolerance:	10%
Voltage DC:	50 VDC
Dielectric Withstanding Voltage:	125 V
Temperature Range:	-55/+125C
Temperature Coefficient:	X7R
Dissipation Factor:	2.5%
Insulation Resistance:	100 GOhms