


LDD Comm C0G, Ceramic, 220 pF, 10%, 100 VDC, C0G

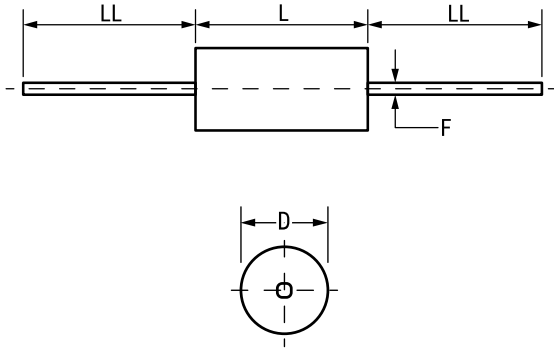

General Information	
Series:	LDD Comm C0G
RoHS:	No
Prop 65:	⚠ WARNING: Cancer and reproductive harm - www.p65warnings.ca.gov .
REACH:	SVHC (Pb – CAS 7439-92-1)
Termination:	Lead (SnPb)
Notes:	Lead Length Shown Is For Parts Supplied In Bulk, See Packaging Specifications For Lead Lengths When Not Provided In Bulk

Dimensions	
D	2.29mm +/-0.25mm
L	4.06mm +/-0.25mm
LL	38.1mm MIN
F	0.51mm -0.08mm

Packaging Specifications	
Packaging:	T&R
Packaging Quantity:	5000

Specifications	
Capacitance:	220 pF
Capacitance Tolerance:	10%
Voltage DC:	100 VDC
Dielectric Withstanding Voltage:	250 VDC
Temperature Range:	-55/+125°C
Temperature Coefficient:	C0G
Dissipation Factor:	0.10% 1MHz 25C
Insulation Resistance:	4.545 GOhms