

## MIRA-M

~30° medium beam


### TECHNICAL SPECIFICATIONS:


Dimensions	Ø 32.4 mm
Height	14.7 mm
Fastening	
Colour	clear
Box size	480 x 280 x 300 mm
Box weight	7.3 kg
Quantity in Box	840 pcs
ROHS compliant	yes ⓘ




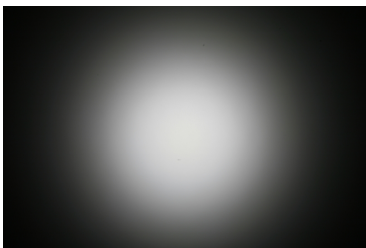



### MATERIAL SPECIFICATIONS:

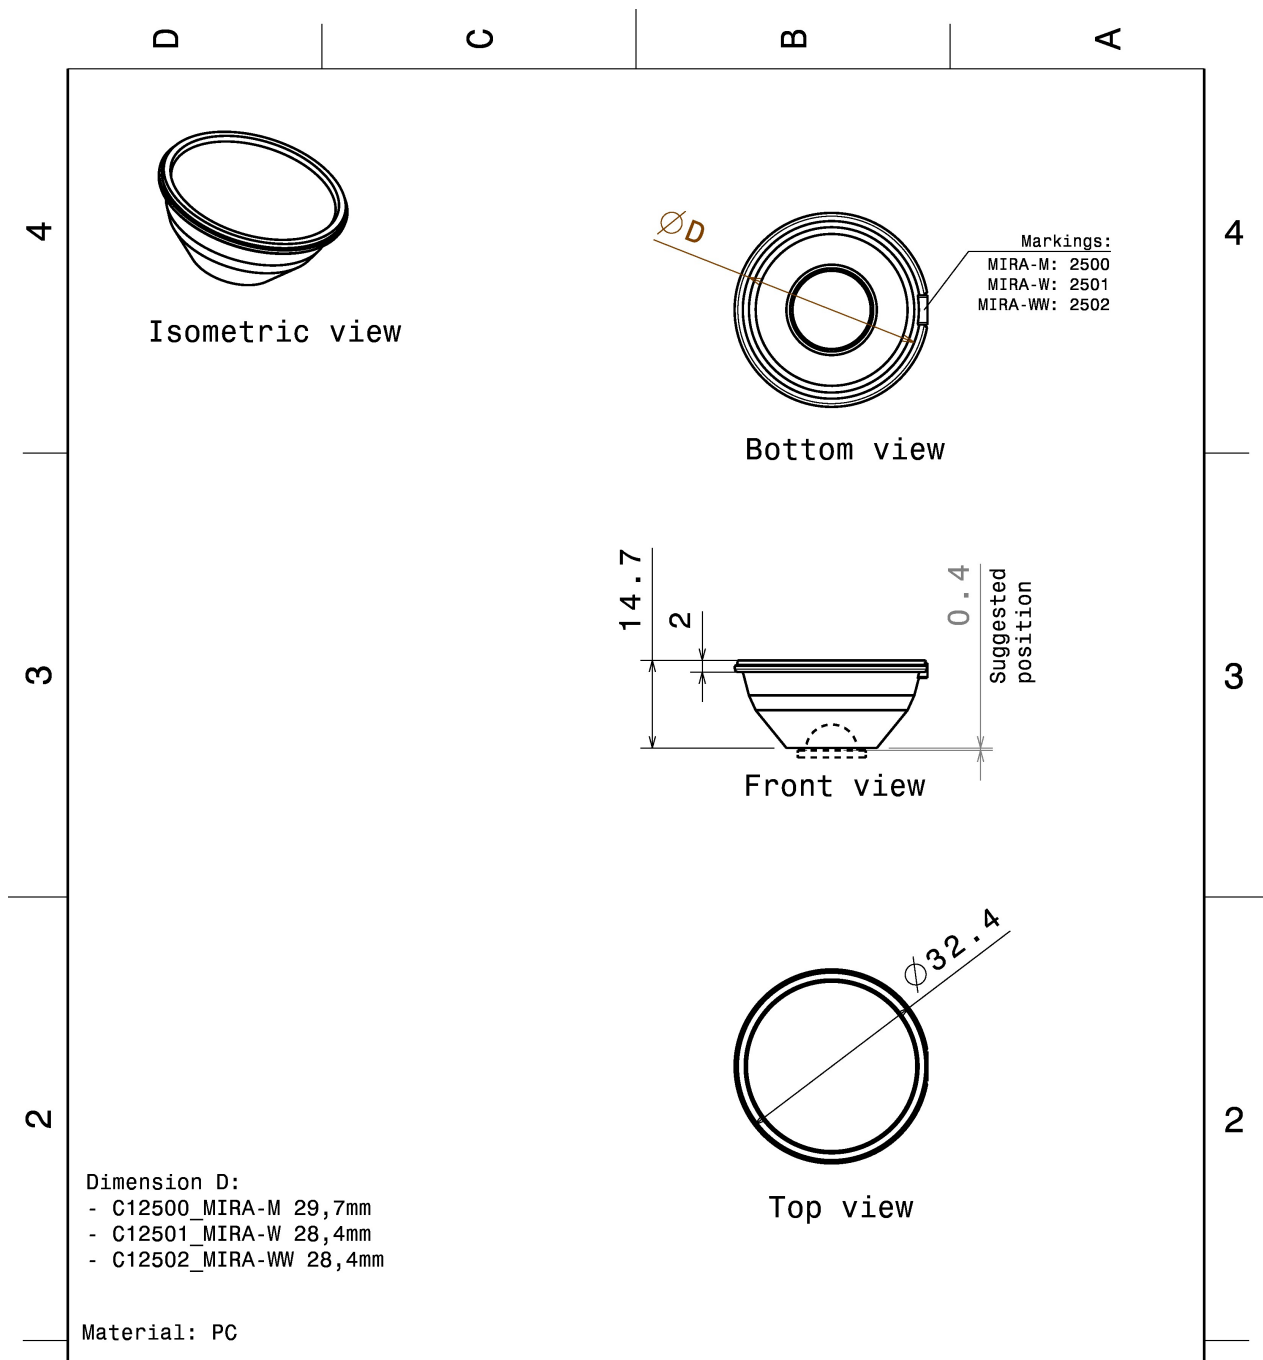Component	Type	Material	Colour
MIRA-M	Lens	PC	clear



This drawing is our property. It can't be reproduced or communicated without our written agreement.				Ledil Oy Salorankatu 10 FIN 24240 SALO Finland	
<b>DRAWING TITLE</b>					
<b>DRAWN BY</b> mav	<b>DATE</b> 02.04.2012	<b>Datasheet MIRA lens</b>			
<b>CHECKED BY</b> sn	<b>DATE</b> 02.04.2012	<b>SIZE</b> A4	<b>DRAWING NUMBER</b> -		<b>REV</b> 1
<b>DESIGNED BY</b> mav	<b>DATE</b> 29.11.2011	<b>SCALE</b> 1:1	<b>WEIGHT (g)</b>	<b>SHEET</b> 1/1	


**PHOTOMETRIC DATA (MEASURED):**
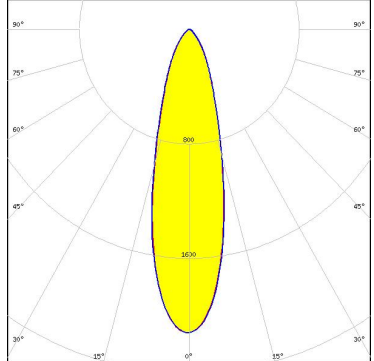
<p>bridgelux.</p> <p>LED BXRA ES Star</p> <p>FWHM 30.0°</p> <p>Efficiency 82 %</p> <p>Peak intensity cd/lm</p> <p>Required components:</p>	
<p>bridgelux.</p> <p>LED V10 Gen6</p> <p>FWHM 35.0°</p> <p>Efficiency 77 %</p> <p>Peak intensity 1.760 cd/lm</p> <p>Required components:</p>	
<p><b>CREE</b> ⇄</p> <p>LED CXA/B 15xx</p> <p>FWHM 31.0°</p> <p>Efficiency 85 %</p> <p>Peak intensity 2.000 cd/lm</p> <p>Required components:</p>	
<p><b>CREE</b> ⇄</p> <p>LED MHD-E/G</p> <p>FWHM 28.0°</p> <p>Efficiency 85 %</p> <p>Peak intensity 2.100 cd/lm</p> <p>Required components:</p>	 



**PHOTOMETRIC DATA (MEASURED):**





LED MT-G  
FWHM 28.0°  
Efficiency 83 %  
Peak intensity 2.200 cd/lm  
Required components:

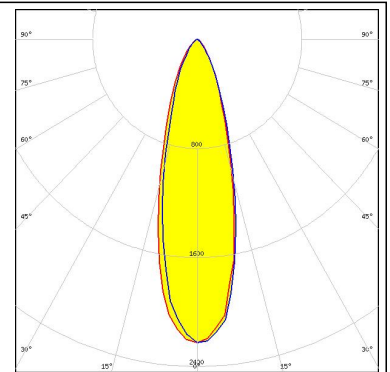


LED XHP70  
FWHM 27.0°  
Efficiency 83 %  
Peak intensity 2.200 cd/lm  
Required components:

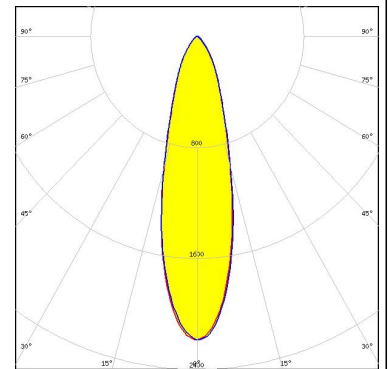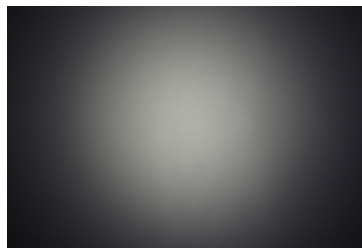

LED LUXEON M/MX  
FWHM 25.0°  
Efficiency 81 %  
Peak intensity cd/lm  
Required components:

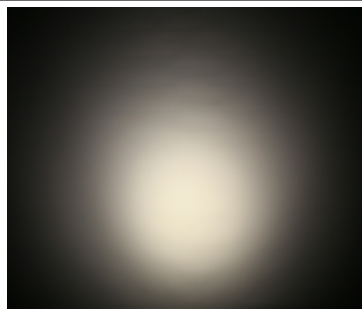



LED LUXEON MZ  
FWHM 19.0°  
Efficiency 81 %  
Peak intensity 3.900 cd/lm  
Required components:

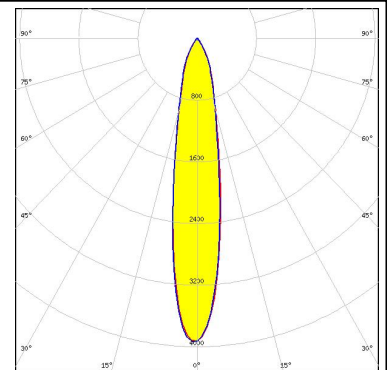



### PHOTOMETRIC DATA (MEASURED):





LED NFMW48xA  
 FWHM 21.0°  
 Efficiency 82 %  
 Peak intensity 3.300 cd/lm  
 Required components:

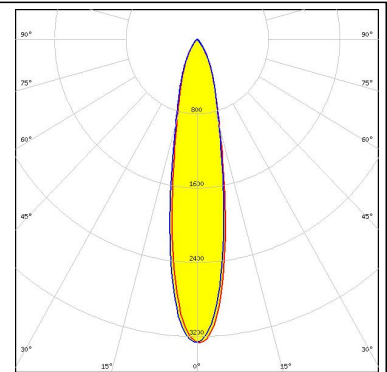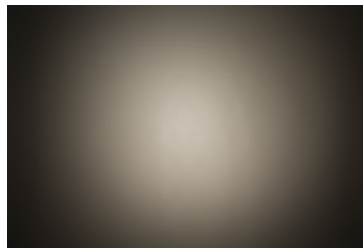


LED NSCxL036A  
 FWHM 28.0°  
 Efficiency 80 %  
 Peak intensity 2.400 cd/lm  
 Required components:

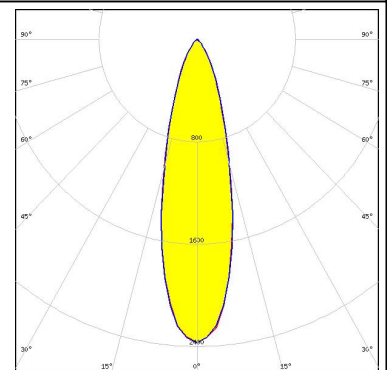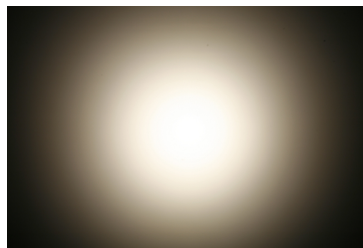

LED NSMx286M  
 FWHM 23.0°  
 Efficiency 80 %  
 Peak intensity 3.050 cd/lm  
 Required components:

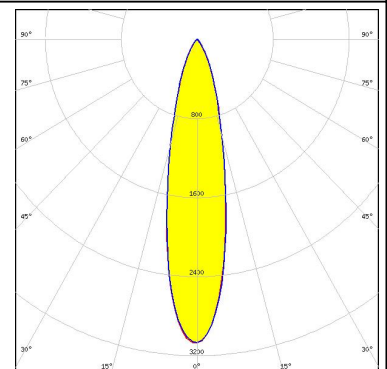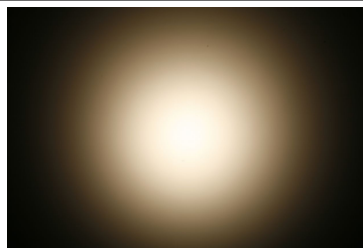

LED Duris S10  
 FWHM 22.0°  
 Efficiency 83 %  
 Peak intensity 3.600 cd/lm  
 Required components:

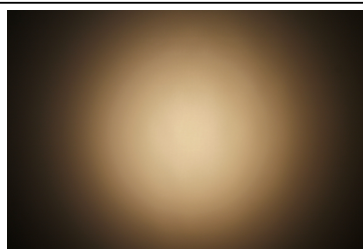

## PHOTOMETRIC DATA (MEASURED):


**OSRAM**  
Opto Semiconductors

LED Soleriq P6  
FWHM 25.0°  
Efficiency 78 %  
Peak intensity 2.880 cd/lm  
Required components:



**OSRAM**  
Opto Semiconductors

LED Soleriq P9  
FWHM 32.0°  
Efficiency 78 %  
Peak intensity 1.890 cd/lm  
Required components:

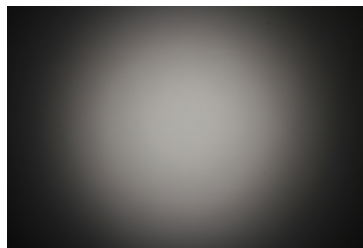



### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Salo, Finland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)