


STRADELLA-16-HB-O

Oval beam for high bay aisles

TECHNICAL SPECIFICATIONS:

Dimensions	49.5 mm
Height	8.3 mm
Fastening	
ROHS compliant	yes 


MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
STRADELLA-16-HB-O	Multi-lens	PMMA	clear	



ORDERING INFORMATION:



Component	Qty in box	MOQ	MPQ	Box weight (kg)
C16156_STRADELLA-16-HB-O » Box size: 476 x 273 x 292 mm	800		160	8.3

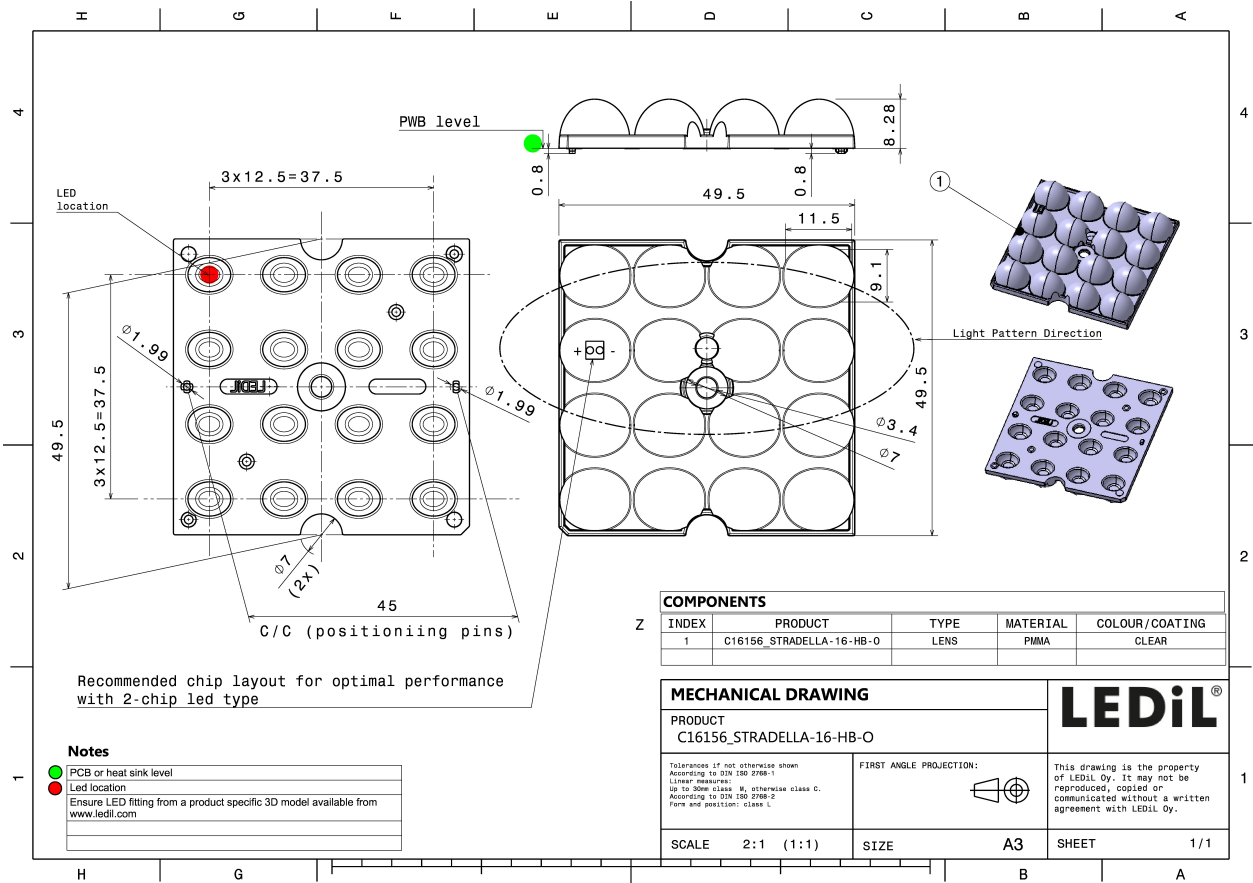

PHOTOMETRIC DATA (MEASURED):



LG Innotek

LED LG 3030
 FWHM 64.0 + 21.0°
 Efficiency 94 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

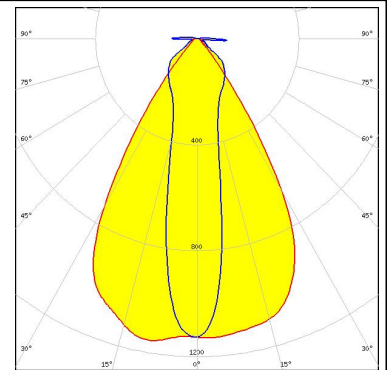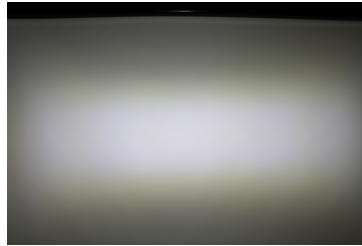



NICHIA

LED NFSx757D
 FWHM 62.0 + 19.0°
 Efficiency 94 %
 Peak intensity 1.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

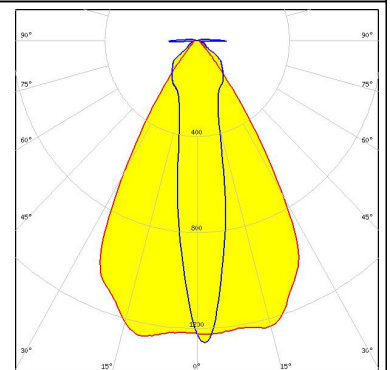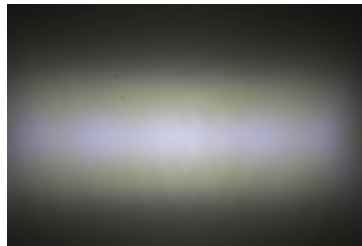



NICHIA

LED NFSx757G
 FWHM 63.0 + 20.0°
 Efficiency 94 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

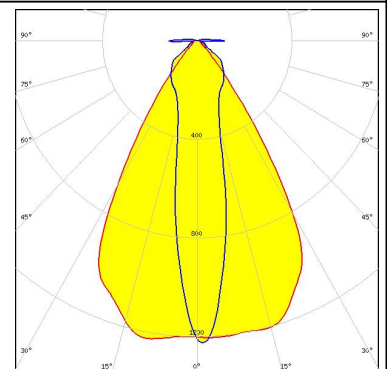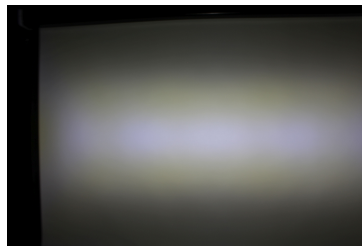

NICHIA



LED NVSW319B
 FWHM 72.0 + 24.0°
 Efficiency 94 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

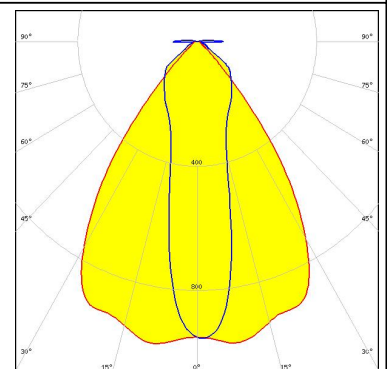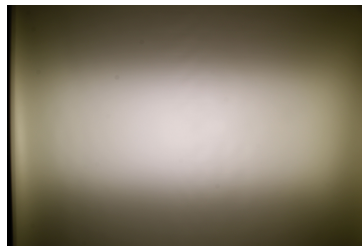

PHOTOMETRIC DATA (MEASURED):

OSRAM


LED PrevaLED Brick MP 4x16
 FWHM 64.0 + 20.0°
 Efficiency 94 %
 Peak intensity 1.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

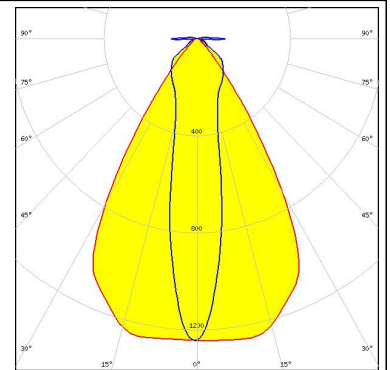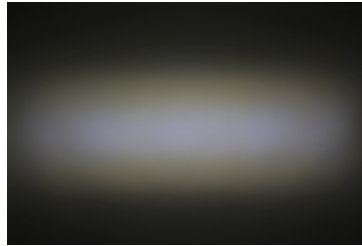

OSRAM

Opto Semiconductors


LED Duris S5 (2 chip)
 FWHM 63.0 + 20.0°
 Efficiency 94 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour Purple
 Required components:

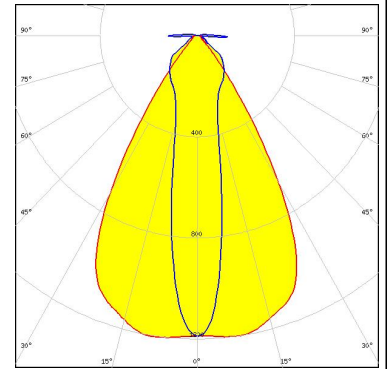

OSRAM

Opto Semiconductors



LED Duris S5 (Single chip)
 FWHM 62.0 + 17.0°
 Efficiency 94 %
 Peak intensity 1.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

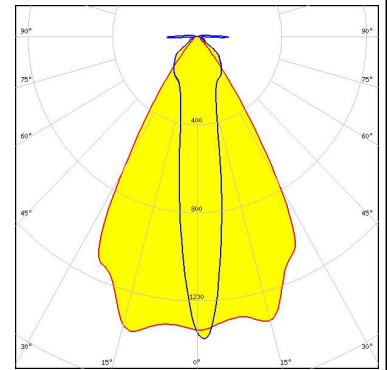

OSRAM

Opto Semiconductors



LED OSCONIQ S 3030
 FWHM 64.0 + 21.0°
 Efficiency 94 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

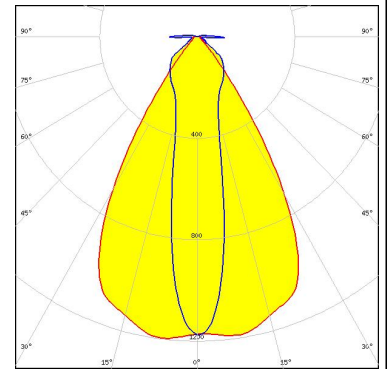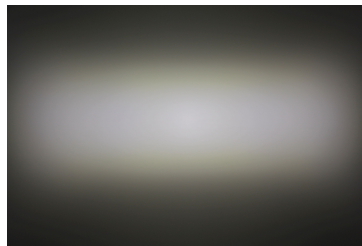

PHOTOMETRIC DATA (MEASURED):



PHILIPS

LED Fortimo FastFlex LED 4x16 DHE G4
 FWHM 63.0 + 20.0°
 Efficiency 94 %
 Peak intensity 1.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

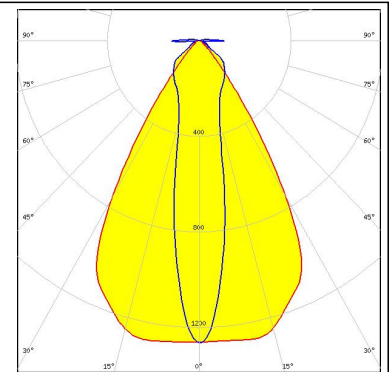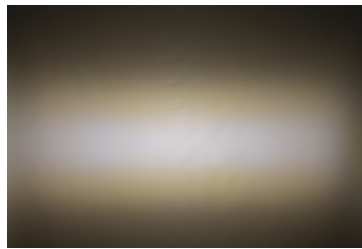



SAMSUNG

LED HiLOM RM64 (LM301B)
 FWHM 64.0 + 20.0°
 Efficiency 94 %
 Peak intensity 1.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

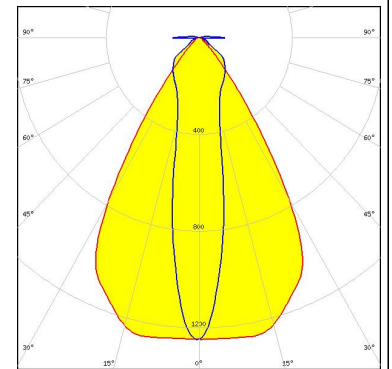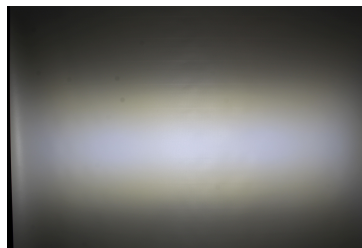



SAMSUNG

LED LM231 A/B
 FWHM 62.0 + 15.0°
 Efficiency 94 %
 Peak intensity 1.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

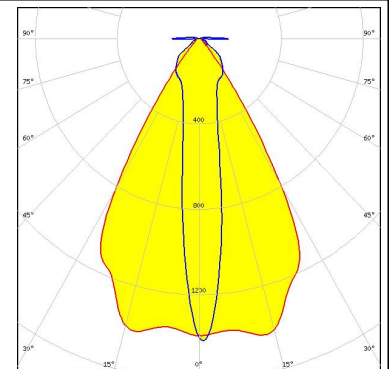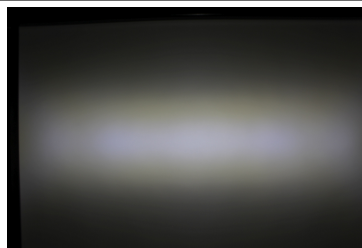



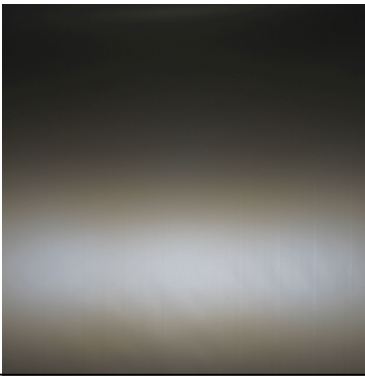
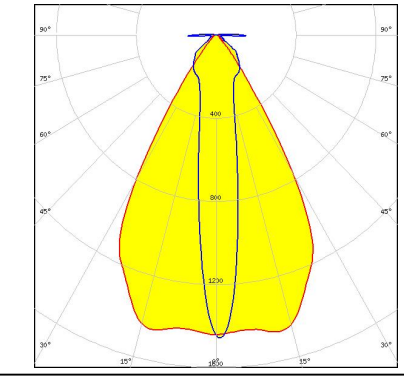




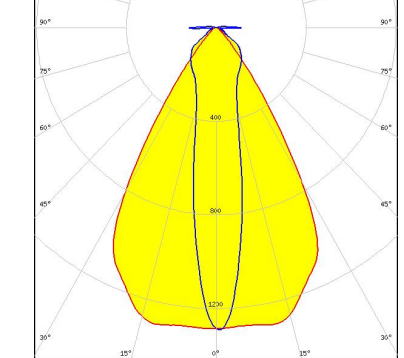


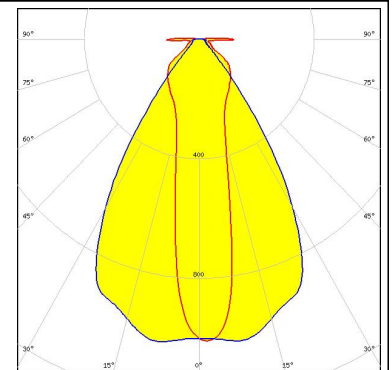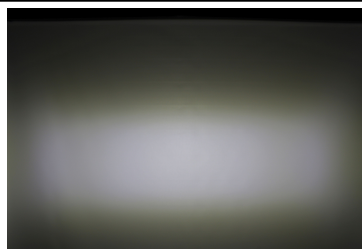SCIOLUX

LED XLE-S44XTEHE (XT-E HE)
 FWHM 66.0 + 21.0°
 Efficiency 94 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

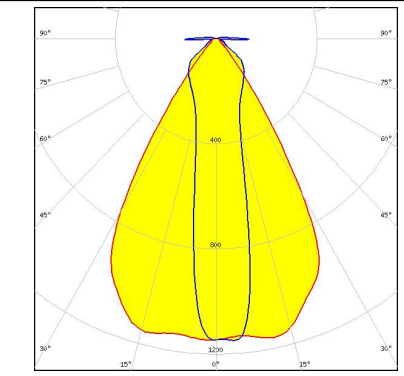

PHOTOMETRIC DATA (MEASURED):
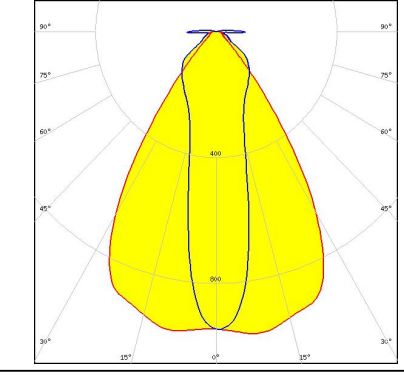
<p> SEOL SEMICONDUCTOR</p> <p>LED: SEOUL 3030 FWHM: 64.0 + 20.0° Efficiency: 94 % Peak intensity: 1.2 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>		
<p> SEOL SEMICONDUCTOR</p> <p>LED: SEOUL DC 3030 FWHM: 61.0 + 16.0° Efficiency: 94 % Peak intensity: 1.5 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>		
<p> SEOL SEMICONDUCTOR</p> <p>LED: Z5M3 FWHM: 67.0 + 24.0° Efficiency: 94 % Peak intensity: 1 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>		
<p>TRIDONIC</p> <p>LED: RLE 4x16 4000lm MP ADV2 OTD FWHM: 64.0 + 19.0° Efficiency: 94 % Peak intensity: 1.3 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>		

PHOTOMETRIC DATA (MEASURED):


TRIDONIC

LED	RLE 4x8 2000lm MP ADV2 OTD
FWHM	64.0 + 19.0°
Efficiency	94 %
Peak intensity	1.3 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	


PHOTOMETRIC DATA (SIMULATED):




LED XHP35 HI
 FWHM 67.0 + 22.0°
 Efficiency 94 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

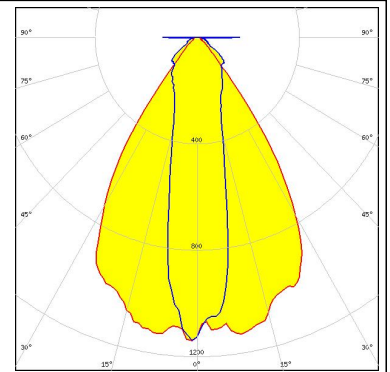


LED XP-G2
 FWHM 71.0 + 20.0°
 Efficiency 87 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

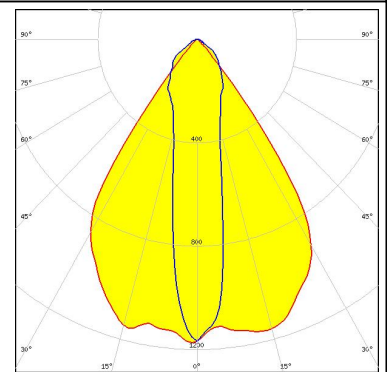

LED XP-G2 HE
 FWHM 69.0 + 24.0°
 Efficiency 92 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

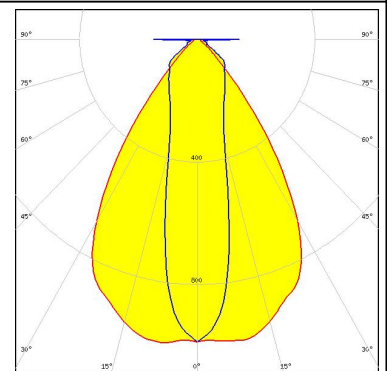


LED XP-G3
 FWHM 70.0 + 25.0°
 Efficiency 92 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

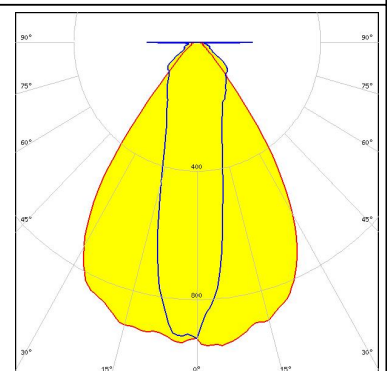


PHOTOMETRIC DATA (SIMULATED):




LED XT-E
FWHM 67.0 + 19.0°
Efficiency 87 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

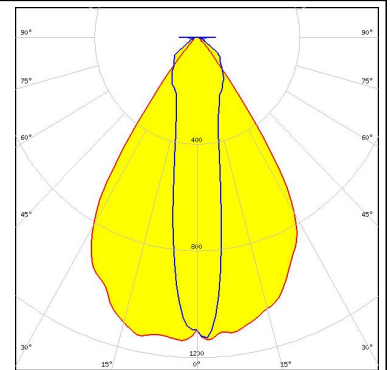


LED LUXEON 3030 2D (Round LES)
FWHM 50.0 + 16.0°
Efficiency 91 %
Peak intensity 1.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

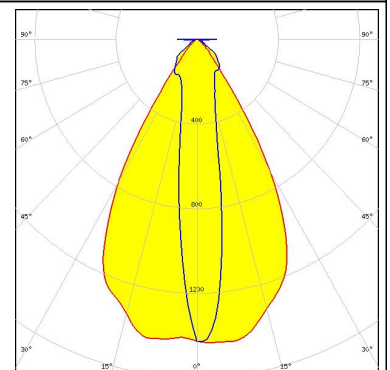

LED LUXEON CZ
FWHM 60.0 + 14.0°
Efficiency 94 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

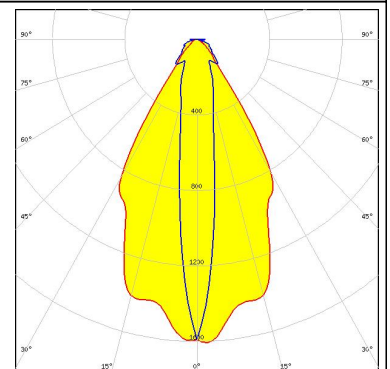

LED Duris E5
FWHM 20.0 + 63.0°
Efficiency 94 %
Peak intensity 1.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

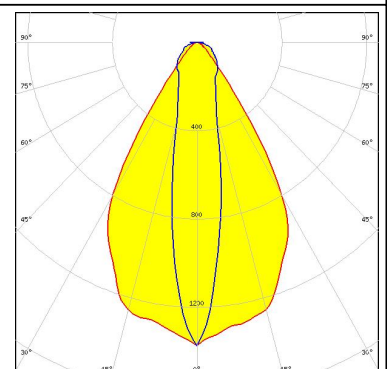


PHOTOMETRIC DATA (SIMULATED):

OSRAM


Opto Semiconductors

LED OSLOM Square CSSRM2/CSSRM3
 FWHM 69.0 + 20.0°
 Efficiency 94 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour Red
 Required components:

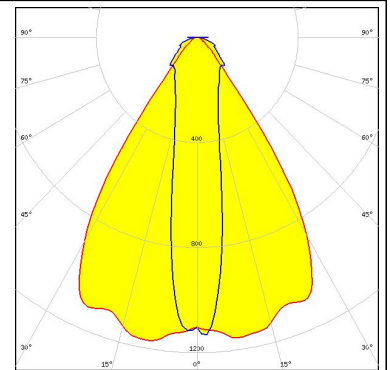

SAMSUNG


LED LM301B
 FWHM 19.0 + 63.0°
 Efficiency 93 %
 Peak intensity 1.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

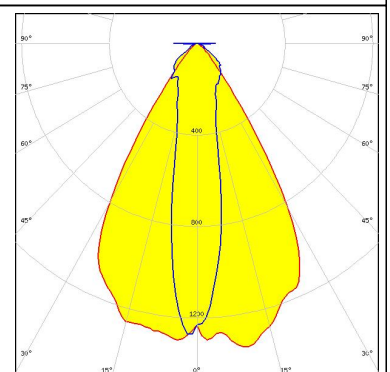

SEOUL SEMICONDUCTOR


LED SEOUL DC 3030C
 FWHM 18.0 + 62.0°
 Efficiency 86 %
 Peak intensity 1.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

Transparent protective cover

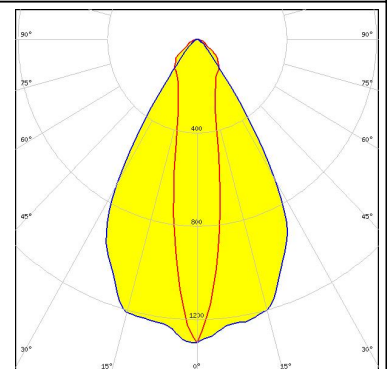


SEOUL SEMICONDUCTOR

LED SEOUL DC 3030C
 FWHM 62.0 + 20.0°
 Efficiency 94 %
 Peak intensity 1.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

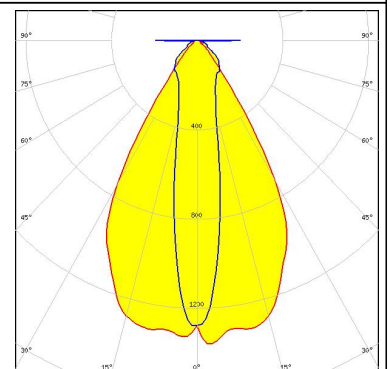

PHOTOMETRIC DATA (SIMULATED):

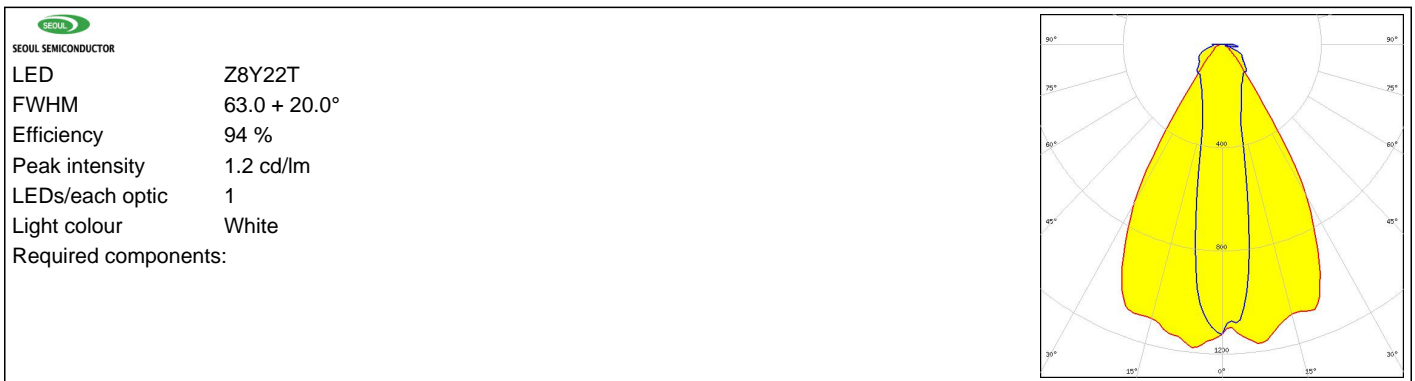

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)