


KPS SMD Comm X8L HT150C, Ceramic, 22 uF, 20%, 25 VDC, X8L, 2220-2

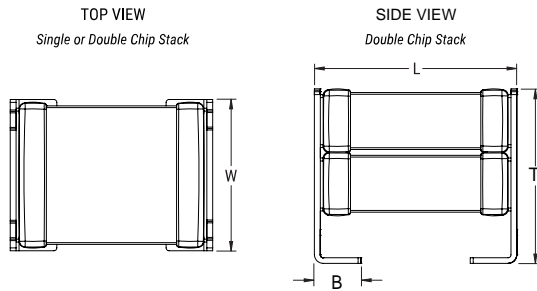

Dimensions	
L	6mm +/-0.5mm
W	5mm +/-0.5mm
T	5mm +/-0.50mm
B	1.6mm +/-0.3mm

Packaging Specifications	
Packaging:	T&R, 180mm, Plastic Tape
Packaging Quantity:	200

General Information	
Series:	KPS SMD Comm X8L HT150C
Style:	Stacked Chip
Description:	SMD, MLCC, Stacked, Double Chip, High Temperature
Features:	High Temperature
RoHS:	Yes
Termination:	Tin
AEC-Q200:	No
Chip Size:	2220-2
Shelf Life:	78 Weeks
MSL:	1

Specifications	
Capacitance:	22 uF
Measurement Condition:	120 Hz 0.5Vrms
Capacitance Tolerance:	20%
Voltage DC:	25 VDC
Dielectric Withstanding Voltage:	62.5 VDC
Temperature Range:	-55/+150°C
Temperature Coefficient:	X8L
Capacitance Change with Reference to +25°C and 0 VDC Applied (TCC):	+15% (-55C to +125C), +15/-40% (125C to 150C), 120Hz 0.5Vrms
Dissipation Factor:	2.5% 120 Hz 0.5Vrms
Aging Rate:	3% Loss/Decade Hour: Referee Time is 1000 Hours
Insulation Resistance:	23 MOhms