


Capacitor, ceramic, 0.01 uF, +/-10% Tol, 50V, X7R, Lead Spacing=0.2"

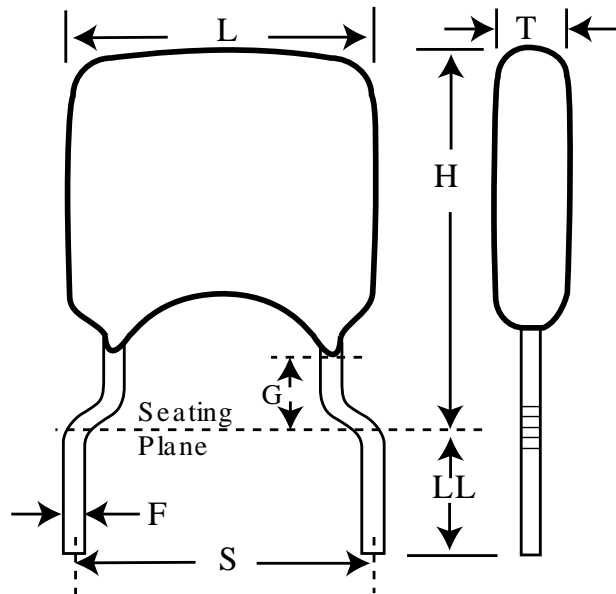

Dimensions (in)

Specifications

| ID | Dimension | Tolerance | Manufacturer: | KEMET |
|----|-----------|---------------|--------------------------|------------------|
| L | 0.2 | max | Capacitance: | 0.01 uF |
| H | 0.26 | max | Lead Spacing: | 0.2" |
| T | 0.125 | max | Voltage: | 50V |
| S | 0.2 | +/-0.03 | Temperature Coefficient: | X7R |
| LL | 0.276 | min | Tolerance: | +/-10% |
| F | 0.02 | +0.004/-0.001 | Body Type: | Radial Conformal |
| K | 0.02 | | Lead Type: | Standard Leads |
| G | 0.031 | ref | Lead Form: | Hockey Stick |
| | | | Termination Type: | Tin |
| | | | Package Kind: | T&R |
| | | | Package Size: | 12in |
| | | | Package Type: | Type 1 |
| | | | Package Quantity: | 2500 |

Notes:

- Dimension G represents meniscus-free zone above seating plane
- Lead length shown is for parts supplied in bulk. See packaging specifications for lead lengths when not provided in bulk