


GoldMax 300 Comm X7R, Ceramic, 0.022 uF, 10%, 50 VDC, X7R, GoldMax, Commercial Standard, Lead Spacing = 5.08mm

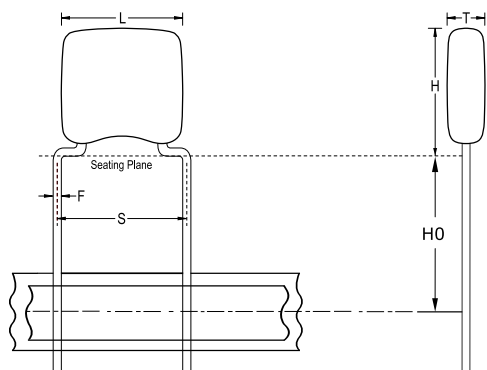

Dimensions

| | |
|-----------|----------------------|
| L | 5.08mm MAX |
| H | 6.6mm MAX |
| T | 3.18mm MAX |
| S | 5.08mm +/-0.78mm |
| HO | 16mm +/-0.5mm |
| F | 0.51mm +0.1/-0.025mm |

Packaging Specifications

| | |
|----------------------------|------------|
| Packaging: | T&R, 305mm |
| Packaging Quantity: | 2500 |

General Information

| | |
|----------------------|------------------------------|
| Series: | GoldMax 300 Comm X7R |
| Style: | Radial |
| Description: | GoldMax, Commercial Standard |
| RoHS: | Yes |
| Termination: | Tin |
| Failure Rate: | N/A |
| AEC-Q200: | No |
| Halogen Free: | Yes |

Specifications

| | |
|--|---------------------|
| Capacitance: | 0.022 uF |
| Measurement Condition: | 1 kHz 1.0Vrms |
| Capacitance Tolerance: | 10% |
| Voltage DC: | 50 VDC |
| Dielectric Withstanding Voltage: | 125 VDC |
| Temperature Range: | -55/+125°C |
| Temperature Coefficient: | X7R |
| Capacitance Change with Reference to +25°C and 0 VDC Applied (TCC): | 0.15, 1kHz 1.0Vrms |
| Dissipation Factor: | 2.5% 1 kHz 1.0Vrms |
| Aging Rate: | 3% Loss/Decade Hour |
| Insulation Resistance: | 45.45 GOhms |