


# C333C334Z1U5TA

aka C333C334Z1U5TA

Capacitor, ceramic, 0.33 uF, -20/+80% Tol, 100V, Z5U, Lead Spacing=0.2"

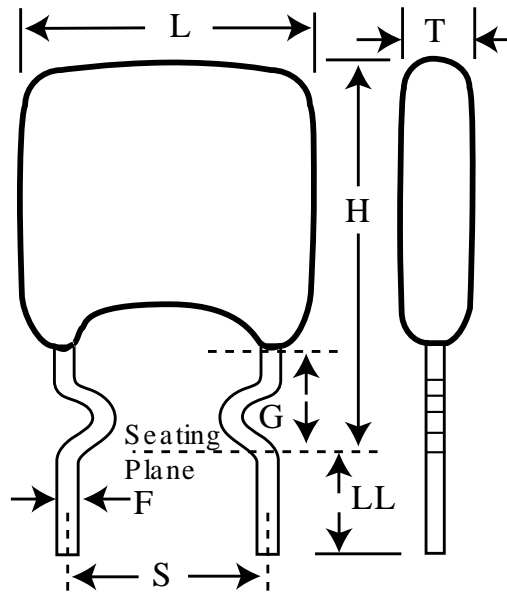

## Dimensions (in)

## Specifications

ID	Dimension	Tolerance	Manufacturer:	KEMET
L	0.3	max	Capacitance:	0.33 uF
H	0.39	max	Lead Spacing:	0.2"
T	0.15	max	Voltage:	100V
S	0.2	+/-0.03	Temperature Coefficient:	Z5U
LL	0.276	min	Tolerance:	-20/+80%
F	0.02	+0.004/-0.001	Body Type:	Radial Conformal
K	0.02		Lead Type:	Standard Leads
G	0.031	ref	Lead Form:	Inward Crimp
			Termination Type:	Tin
			Package Kind:	Bulk
			Package Type:	Bag
			Package Quantity:	250

### Notes:

-Dimension G represents meniscus-free zone above seating plane

-Lead length shown is for parts supplied in bulk. See packaging specifications for lead lengths when not provided in bulk