


Capacitor, ceramic, 0.47 uF, +/-20% Tol, 50V, Z5U, Lead Spacing=0.2"

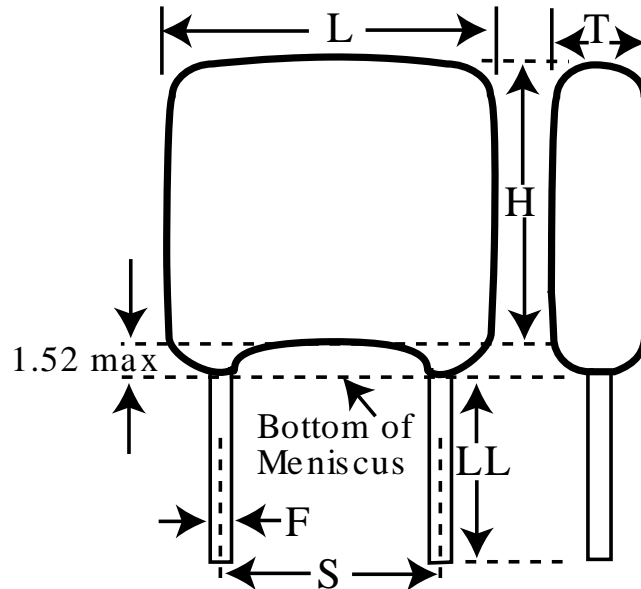

Dimensions (in)

Specifications

| ID | Dimension | Tolerance | Manufacturer: | KEMET |
|----|-----------|---------------|--------------------------|------------------|
| L | 0.4 | max | Capacitance: | 0.47 uF |
| H | 0.46 | max | Lead Spacing: | 0.2" |
| T | 0.15 | max | Voltage: | 50V |
| S | 0.2 | +/-0.03 | Temperature Coefficient: | Z5U |
| LL | 0.276 | min | Tolerance: | +/-20% |
| F | 0.02 | +0.004/-0.001 | Body Type: | Radial Conformal |
| K | 0.02 | | Lead Type: | PC-Leads |
| | | | Lead Form: | Straight Leads |
| | | | Termination Type: | Tin-Lead (SnPb) |
| | | | Package Kind: | T&R |
| | | | Package Size: | 12in |
| | | | Package Type: | Type 2 |
| | | | Package Quantity: | 1000 |

Notes:

-Lead length shown is for parts supplied in bulk. See packaging specifications for lead lengths when not provided in bulk