


C44B, Film, Metallized Polypropylene, Power, 0.1 uF, 5%, 1000 VAC, 2400 VDC

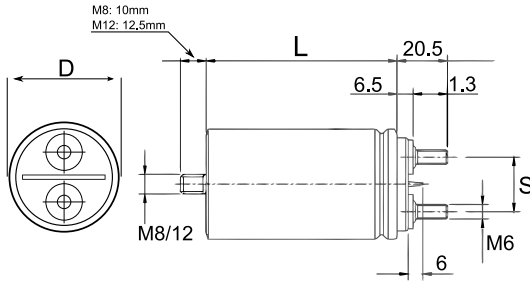

General Information	
Series:	C44B
Dielectric:	Metallized Polypropylene
Style:	Can
RoHS:	Yes
Lead:	Threaded Studs M6
AEC-Q200:	No
Miscellaneous:	Peak Voltage = 4000 VDC.

Dimensions	
D	45mm +/-0.5mm
L	78mm +/-2mm
S	22.3mm +/-0.5mm

Specifications	
Capacitance:	0.1 uF
Capacitance Tolerance:	5%
Voltage AC:	1000 VAC
Voltage DC:	2400 VDC
Temperature Range:	-40/+85°C
Rated Temperature:	70°C
Max dV/dt:	500 V/us
Resistance:	2.5 mOhms (TYP)
Ripple Current:	5 Amps, 50 Amps (Peak)

Packaging Specifications	
Mounting:	Bolt - M8x10
Packaging:	Bulk, Bag
Packaging Quantity:	60

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.