


C44E, Film, Metallized Polypropylene, AC Filter, 100 uF, 5%, 380 VAC, 600 VDC

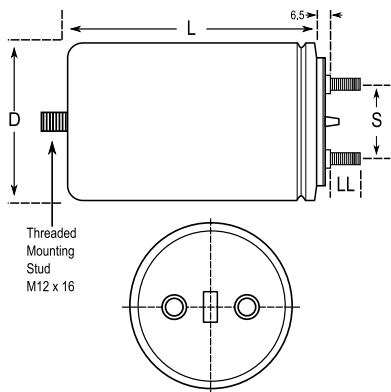

Dimensions	
D	76mm +/-0.5mm
L	138mm +/-2mm
S	35mm +/-0.5mm
LL	13mm NOM

Packaging Specifications	
Mounting:	Bolt - M12x16
Packaging:	Bulk, Bag
Packaging Quantity:	9

General Information	
Series:	C44E
Dielectric:	Metallized Polypropylene
Style:	Can
Features:	Single Phase PFC
RoHS:	Yes
Lead:	Threaded Studs M6
Miscellaneous:	Q = 4.53 kVar. Peak Voltage = 800 VDC

Specifications	
Capacitance:	100 uF
Capacitance Tolerance:	5%
Voltage AC:	380 VAC
Voltage DC:	600 VDC
Temperature Range:	-40/+70°C
Rated Temperature:	70°C
Max dV/dt:	20 V/us
Ripple Current:	30 Amps, 2000 Amps (Peak)