


Film, Metallized Polypropylene, DC Link, C4AE, 12 uF, 5%, 900 V, 70C, Lead Spacing = 37.5mm

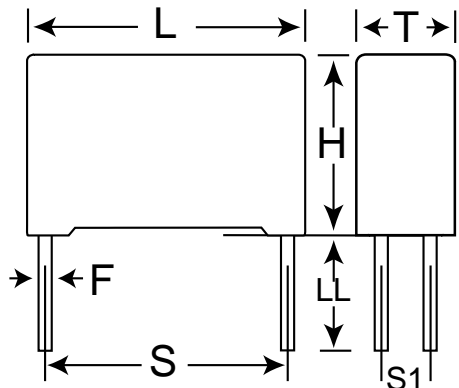

Dimensions

L	42mm +0.6mm
H	40mm +0.2mm
T	20mm +0.4mm
S	37.5mm +/-0.4mm
LL	6mm -2mm
F	1.2mm NOM
G	0.5mm NOM

Packaging Specifications

Packaging:	Bulk
-------------------	------

General Information

Dielectric:	Metallized Polypropylene
Style:	Radial
Series:	C4AE
RoHS:	Yes
Lead:	4 Wire Leads
Miscellaneous:	Thermal Resistance = 44 C/W
Notes:	P1 = 5.1 available on request

Specifications

Capacitance:	12 uF
Capacitance Tolerance:	5%
Voltage DC:	900 VDC
Temperature Range:	-40/+85C
Rated Temperature:	70C
Max dVdt:	16 V
Resistance:	6.3 mOhms (10kHz 70C)
Current:	10 Amps (10kHz 70C), 190 Amps (Peak)
Inductance:	30 nH