


C4AS, Film, Metallized Polypropylene, Power, 0.15 uF, 5%, 600 VAC, 1000 VDC, 70°C, Lead Spacing = 27.5mm

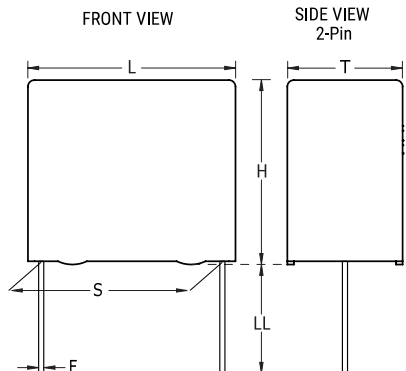

General Information	
Series:	C4AS
Dielectric:	Metallized Polypropylene
Style:	Radial
RoHS:	Yes
Lead:	Wire Leads
AEC-Q200:	No

Dimensions	
L	32mm -0.7mm
H	20mm -0.7mm
T	10mm -0.7mm
S	27.5mm +/-0.4mm
LL	6mm -2mm
F	1.2mm NOM

Specifications	
Capacitance:	0.15 uF
Capacitance Tolerance:	5%
Voltage AC:	600 VAC
Voltage DC:	1000 VDC
Temperature Range:	-40/+85°C
Rated Temperature:	70°C
Dissipation Factor:	0.05%
Max dV/dt:	1344 V/us
Resistance:	12.7 mOhms (100KHz)
Ripple Current:	8 Amps (100kHz 70C), 202 Amps (Peak)

Packaging Specifications	
Packaging:	Bulk, Bag
Packaging Quantity:	288

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.