


C4AS, Film, Metallized Polypropylene, Power, 0.33 uF, 5%, 630 VAC, 1200 VDC, 70°C, Lead Spacing = 27.5mm

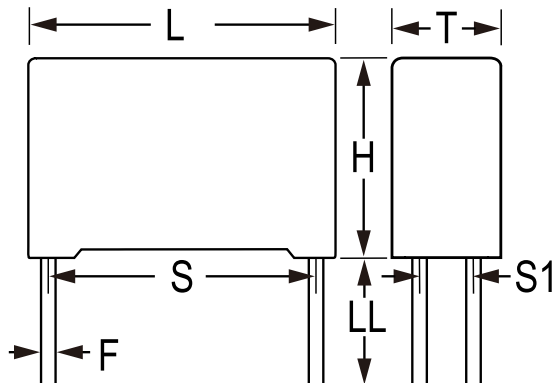

Dimensions

| | |
|----|-----------------|
| L | 32mm -0.7mm |
| H | 33mm -0.7mm |
| T | 18mm -0.7mm |
| S | 27.5mm +/-0.4mm |
| S1 | 5.1mm +/-0.4mm |
| LL | 6mm -2mm |
| F | 1.2mm NOM |

Packaging Specifications

| | |
|---------------------|-----------|
| Packaging: | Bulk, Bag |
| Packaging Quantity: | 80 |

General Information

| | |
|-------------|--------------------------|
| Series: | C4AS |
| Dielectric: | Metallized Polypropylene |
| Style: | Radial |
| RoHS: | Yes |
| Lead: | 4 Wire Leads |
| AEC-Q200: | No |

Specifications

| | |
|------------------------|---------------------------------------|
| Capacitance: | 0.33 uF |
| Capacitance Tolerance: | 5% |
| Voltage AC: | 630 VAC |
| Voltage DC: | 1200 VDC |
| Temperature Range: | -40/+85°C |
| Rated Temperature: | 70°C |
| Dissipation Factor: | 0.05% |
| Max dV/dt: | 1568 V/us |
| Resistance: | 5.1 mOhms (100kHz) |
| Ripple Current: | 18 Amps (100kHz 70C), 517 Amps (Peak) |