


Film, Metallized Polypropylene, Power, C4BS, 0.22 uF, 5%, 2,000 V, 70C, Lead Spacing = 22mm

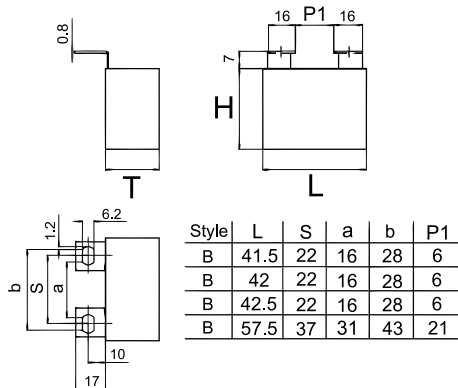

| Dimensions | |
|------------|------------|
| L | 41.5mm NOM |
| H | 40mm NOM |
| T | 20mm NOM |
| S | 22mm |

| Packaging Specifications | |
|--------------------------|------|
| Packaging: | Bulk |
| Packaging Quantity: | 52 |

| General Information | |
|---------------------|--------------------------|
| Dielectric: | Metallized Polypropylene |
| Style: | Radial |
| Series: | C4BS |
| Features: | IGBT Circuit |
| RoHS: | Yes |
| Lead: | Flat Tabs |
| Miscellaneous: | Kemet Style B Tabs |

| Specifications | |
|------------------------|---------------------------------------|
| Capacitance: | 0.22 uF |
| Capacitance Tolerance: | 5% |
| Voltage DC: | 2000 VDC |
| Voltage AC: | 700 VAC |
| Temperature Range: | -40/+85C |
| Rated Temperature: | 70C |
| Max dVdt: | 1,379 V |
| Resistance: | 10.7 mOhms (100kHz) |
| Current: | 14 Amps (100kHz 70C), 303 Amps (Peak) |
| Inductance: | 41 nH |