


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	6/29/10	D.GRIFFIN
B	ECN 4906: CLARIFY PIN 1 AND ADD DIELECTRIC CALL OUT	7/14/10	D.FRISIELLO
C	ECN 5671: CN RELEASE	8/22/11	D.FRISIELLO
D	ECN 5868: ADDED LENGTHS 03 M, 075 M	12/5/11	D.FRISIELLO

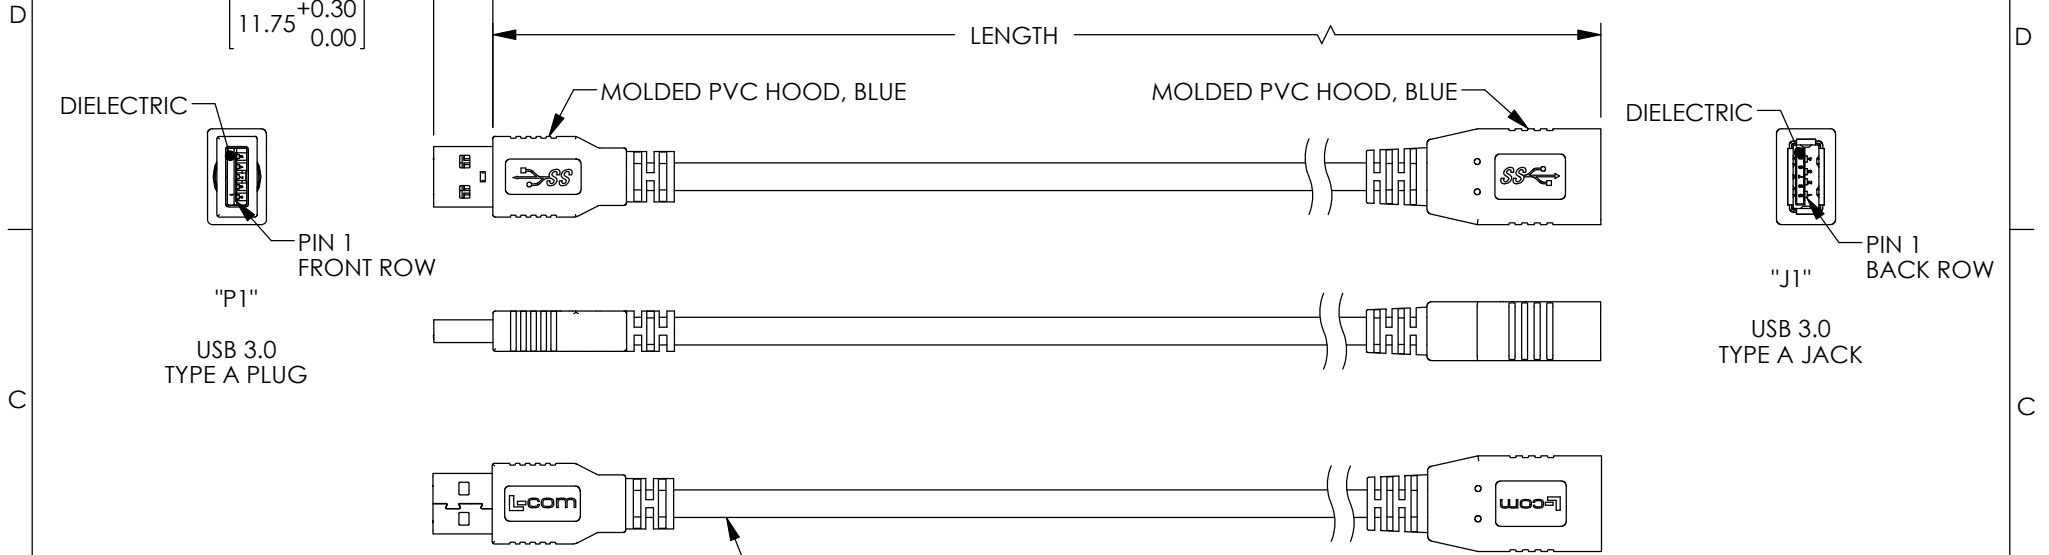

UL STYLE 20276
 TWO TWISTED PAIR, 30AWG WITH ALUM/POLY FOIL SHIELD AND DRAIN WIRE
 ONE UNSHIELDED TWISTED PAIR, 30AWG.
 TWO CONDUCTORS, 24AWG.
 OVERALL BRAID SHIELD
 JACKET: PVC, BLUE

"P1"	WIRING MAP	"J1"
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
5	BLUE	5
6	YELLOW	6
7	DRAIN WIRE	7
7	DRAIN WIRE	7
8	PURPLE	8
9	ORANGE	9
SHELL	BRAID	SHELL

MODEL NUMBER	LENGTH METERS [FEET]
CAU3AX-03M	0.3 [.98]
CAU3AX-05M	0.5 [1.64]
CAU3AX-075M	0.75 [2.46]
CAU3AX-1M	1.0 [3.28]
CAU3AX-2M	2.0 [6.56]
CAU3AX-3M	3.0 [9.84]

RoHS Compliant ✓

- NOTES:
1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 2. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
 3. CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS.
 4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D. PARHAM	06/25/2010		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY D. FRISIELLO	06/25/2010	PRODUCT DESCRIPTION	
PROJECTION	APPROVED BY S. SMITH	06/29/2010	CA, USB 3.0 TYPE A-M TO TYPE A-F	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321
			DWG. NO. CAU3AX	REV. D
			SCALE: NONE	CAD FILE: CAU3AX.SLDDRW
				SHEET 1 OF 1