


# Comparison between CFU455F2 and CFULA455KF4A-B0(Old P/N: CFUS455F)

## -Dimension-

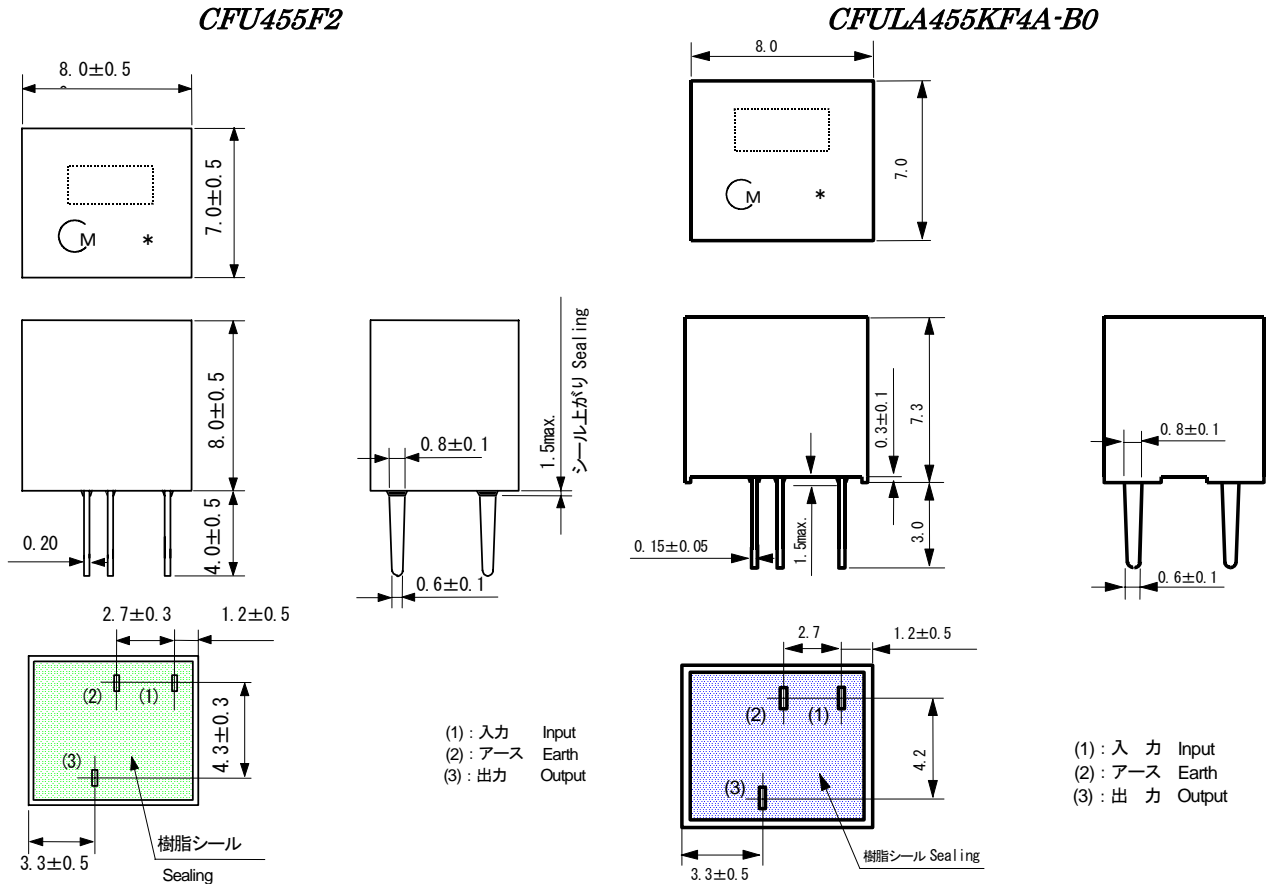


- 55F : Marking
- M : Vendor's Code
- \* : EIAJ Monthly Code

- F : Marking
- M : Vendor's Code
- \* : EIAJ Monthly Code

## - Electrical Characteristics Specification

<i>Item</i>	<i>CFU455F2</i>	<i>CFULA455KF4A-B0</i>
Center Frequency (fo)	455.0 ± 1.5 kHz	455.0 ± 1.5 kHz
6dB Bandwidth (from 455 kHz)	± 6.0 kHz min.	± 6.0 kHz min.
40dB Bandwidth (from 455 kHz)	± 12.5 kHz max.	± 12.5 kHz max.
Stop Band Attenuation(within 455 ± 100 kHz)	27dB min.	27dB min.
Insertion Loss (at minimum loss point)	6.0dB max.	6.0dB max.
Ripple (within 455 ± 3.0 kHz)	1.5dB max.	1.5dB max.
Input/Output Impedance (Nominal)	2.0 kΩ	2.0 kΩ

## -Test Circuit- (Common)

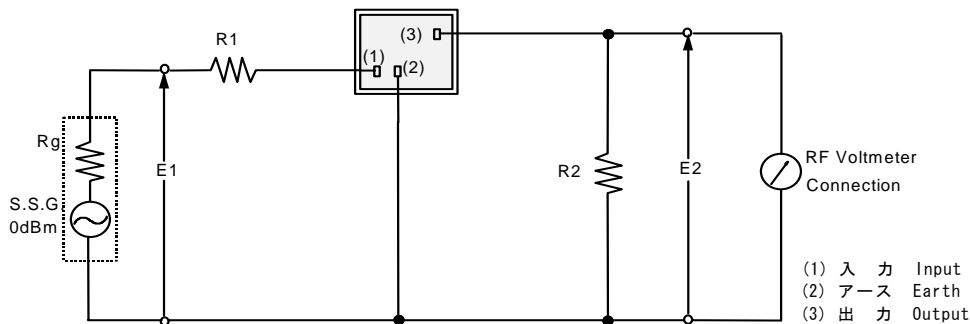

$R1 + Rg = R2 = 2.0 \text{ k}\Omega$   
 E1 : S.S.G. 開放端出力電圧 S.S.G. Output voltage