


NOTES:

- 1 BRAID TERMINATION RING (RAYCHEM PART NUMBER TR04A1) IS SUPPLIED LOOSE WITH ADAPTER. RING IS DESIGNED TO BE INSTALLED BY RESISTIVE ELECTRICAL HEATING AND IS MARKED WITH THERMOCHROMIC PAINT WHICH CHANGES COLOR WHEN INSTALLATION TEMPERATURE IS REACHED.
2. TEMPERATURE RATING FOR ALUMINUM ALLOY IS -65° TO +150°C.
3. PART SHALL BE PERMANENTLY MARKED WITH PART NUMBER PER MIL-STD-130.
4. PLATING IS CADMIUM PER QQ-P-416 TYPE II CLASS 3 OVER ELECTROLESS NICKEL PER MIL-C-26074 CLASS 3 OR 4 GRADE B (500 HOUR SALT SPRAY RESISTANT FINISH).
6. ALL CORNERS SHALL BE ROUNDED.
7. THIS PART IS DESIGNED TO TERMINATE A BRAIDED CABLE SHIELD AND A HEAT SHRINKABLE BOOT TO A CONNECTOR.
- 8 RING SHALL NOT BE MARKED.
- 9 PART MATES WITH CONNECTOR MS3456W10S-25.

REVISIONS				
ZONE	LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED

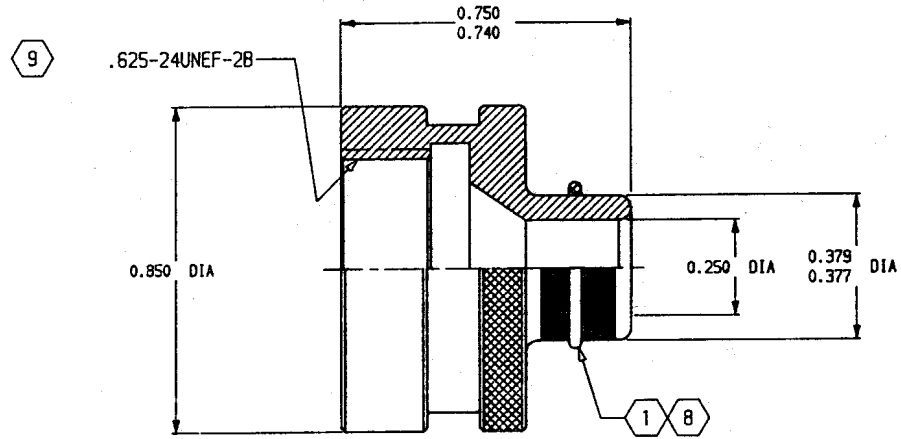

If this document is printed it becomes uncontrolled.  
Check with the web for latest revision.

THIS DRAWING AND THE INFORMATION SET FORTH HEREIN ARE THE PROPERTY OF RAYCHEM CORPORATION AND ARE TO BE HELD IN TRUST AND CONFIDENCE. PUBLICATION, REPRODUCTION, DISCLOSURE, OR USE FOR ANY PURPOSE NOT EXPRESSLY AUTHORIZED IN WRITING BY RAYCHEM CORPORATION IS PROHIBITED.

MECHANICAL PROPERTIES	PMIC		UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES  TOLERANCES ON 2 PLACE    3 PLACE ±            ± 0.005	CONTRACT NUMBER		RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025	
	YP			CONTRACTOR		ADAPTER, SHIELD TERMINATION	
TS			THIRD ANGLE PROJECTION	DRAWN BY K. T.	DATE (YR-MO-DA) 89-03-02	SIZE C	CAGE CODE 06090
EL2				CHECKER L. VONDRA	ENGINEER L. VONDRA		
RA			DO NOT SCALE THIS DRAWING	DRAWING APPROVAL W.C. GAY 3-3-89		SCALE NONE	SHEET -
SH			NATL. ENGR	DESIGN APPROVAL			
RH			NEXT ASSY    USED ON				
			APPLICATION				