

NOTES:

1. MATERIAL:

- | | |
|--------------------|--|
| A) BACKSHELL | COPPER ALLOY 172 PER QQ-A-533 |
| B) BACKSHELL SCREW | STAINLESS STEEL PER QQ-S-763, 300 SERIES |
| C) CLAMP BAR | STAINLESS STEEL PER QQ-S-763, 300 SERIES |
| D) INSERT | ALUMINUM ALLOY PER QQ-A-356 |
| E) CLAMP SCREW | STAINLESS STEEL PER QQ-S-763, 300 SERIES |
| F) BRAID | COPPER ALLOY |


0.285 MAX.
[7.24]

2. FINISH:

- | | |
|--------------------|-----------------------------|
| A) BACKSHELL | CADMIUM PLATED PER QQ-P-416 |
| B) BACKSHELL SCREW | CADMIUM PLATED PER QQ-P-416 |
| C) CLAMP BAR | CADMIUM PLATED PER QQ-P-416 |
| D) INSERT | CADMIUM PLATED PER QQ-P-416 |
| E) CLAMP SCREW | CADMIUM PLATED PER QQ-P-416 |
| F) BRAID | TIN PLATED |

3. RAYCHEM PART NUMBER CHA-0189 AND DATE CODE ARE STAMPED APPROXIMATELY AS SHOWN.

4. WHEN A BUS IS REQUIRED FOR TERMINATING SHIELDS, REFER TO RAYCHEM SPECIFICATION CONTROL DRAWING CTA-0158 FOR BUS DETAILS.

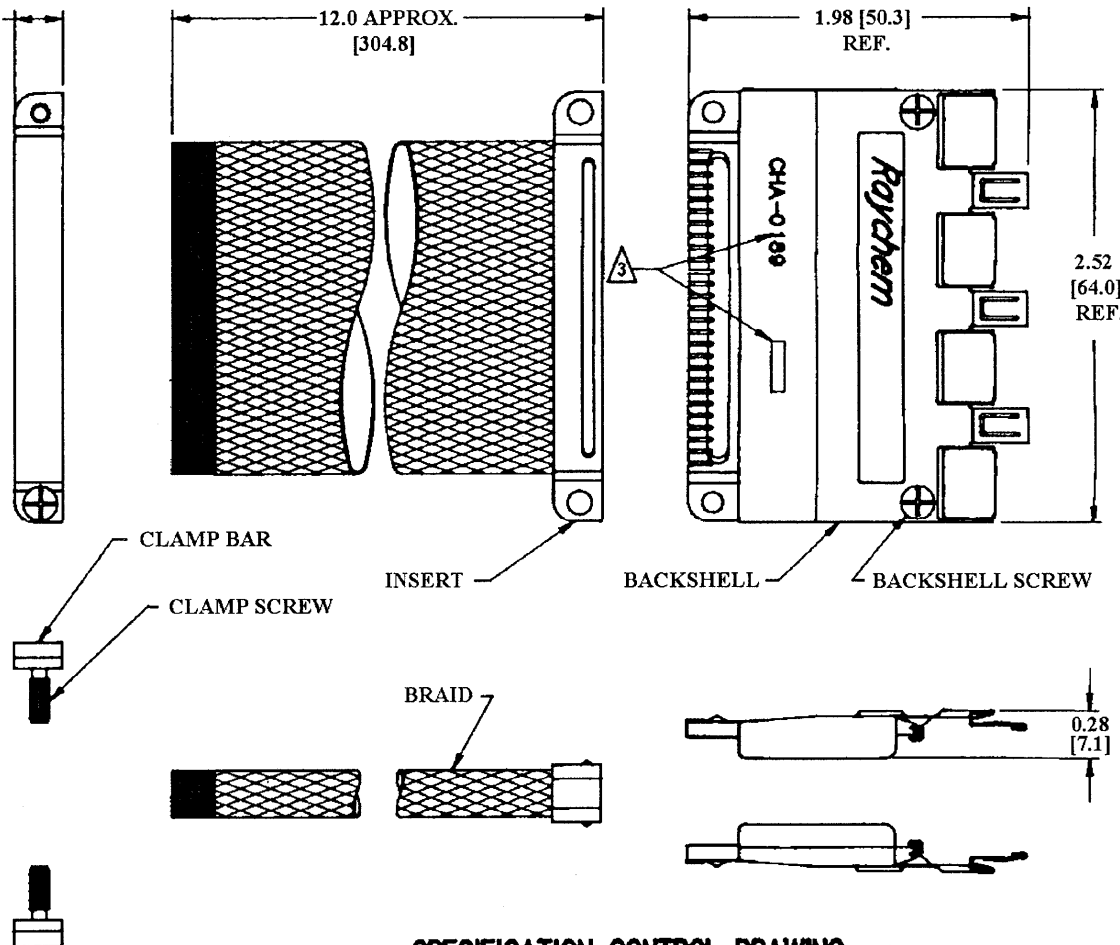

SPECIFICATION CONTROL DRAWING

© Raychem Corporation 1986

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN BRACKETS.	DRAWN	LUTTICKEN	4-23-87	Raychem RAYCHEM CORPORATION 500 OAKVIEW DRIVE MILPITAS, CALIFORNIA 95026			
	CHECKED	J.B.					
	DECIMALS .XXX ± .005 (.13 mm) .XX ± .02 (.5 mm)	APPROVED	J.BLAIR	4-27-87	TITLE BACKSHELL, PLUG, 2", EME, CADIUM PLATED (FOR ROUND WIRE PLANAR-ARRAYED CABLES) MTC SERIES		
		APPROVED	J.CAMERON	4-29-87			
ANGLES .X ±	CAD NAME CHA-0189.PCX						
WEIGHT 63.4 GRAMS MAX.	THIRD ANGLE PROJECTION			SIZE C	CODE IDENT. NO. 06090	SWN. NO. CHA-0189	REV B
				DO NOT SCALE THIS DRAWING		SHEET 1 OF 1	

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.