

PRODUCTS

Chilisin provides inductor turnkey solutions for EMI, power and RF and a global technical team to support its customers. Chilisin has become one of the few inductor suppliers capable of providing a complete "one-stop shopping" experience.



HEI201610A

Home > Products > Power Inductor > HEI201610A

Power Inductor


Chip Inductor

Bead

Common Mode Choke

Product Search

Submit

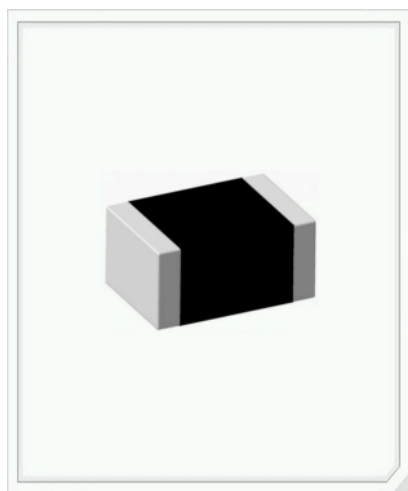

Part Number : CLH2012T-3N3?-S

Structure	Multilayer
Size Code(JIS/EIA)	2012/0805
Inductance	3.3
Unit	nH
Tolerance(±%)	10,0.3nH
Test Frequency(L)	100 MHz,200 mV
Q Min	12
Test Frequency(Q)	100 MHz,200 mV
SRF(MHz)Min	6000
RDC(?)Max	0.13
IDC(mA)Max	300
Operating Temperature	- 5 5°C~ 1 2 5°C(Including self - temperature rise)
L(mm)	2.0±0.2
W(mm)	1.25±0.2
T(mm)	0.9±0.2

1.Irms : Applied the current to coils
the temperature rise shall not be more than 40°C

P/N	CLH2012T-3N3K-S
Part Numbering	
Dimensions	
Packing	
Recommended Pattern	
Electrical Characteristics Curve	CLH2012T-3N3K-S0 CLH2012T-3N3K-S1

P/N	CLH2012T-3N3S-S
Part Numbering	
Dimensions	
Packing	
Recommended Pattern	
Electrical Characteristics Curve	CLH2012T-3N3S-S0 CLH2012T-3N3S-S1

Back

