

CM5441Z161B-10


UNCONTROLLED DOCUMENT

PHYSICAL DIMENSIONS:

A	13.72 [.540]	+ 0.20 [.008]
B	10.41 [.410]	+ 0.15 [.006]
C	15.24 [.600]	+ 0.25 [.010]
D	5.28 [.208]	+ 0.13 [.005]
E	6.35 [.250]	+ 0.01 [.004]

WIRE DIMENSIONS:

T1	3.05 [.120.]	+ 0.33 [.013]
T2	3.07 [.121]	+ 0.05 [.002]
T3	0.97 [.038]	+ 0.05 [.002]


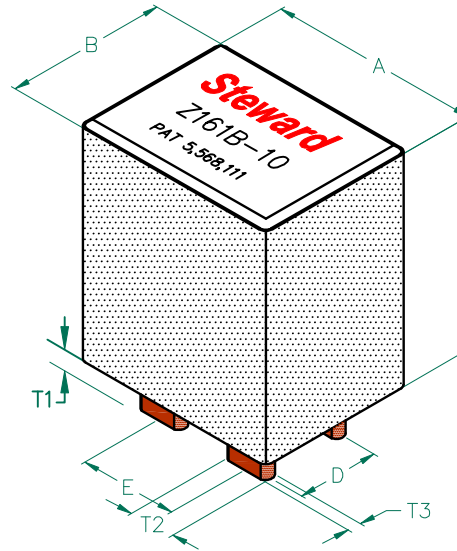


ELECTRICAL CHARACTERISTICS:


Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	160	
Minimum	120	
Maximum	—	.0003 *75,000 mA

NOTES: UNLESS OTHERWISE SPECIFIED

1. BULK PACKED, 825 per CASE.
- 2.* MAXIMUM CURRENT IS:
30,000 mA @ 25° C RISE. 75,000 mA @ 30° C RISE.
3. COMPONENTS SHOULD BE ADEQUATELY PRE-HEATED BEFORE SOLDERING.
4. TERMINATION FINISH IS 100% TIN.

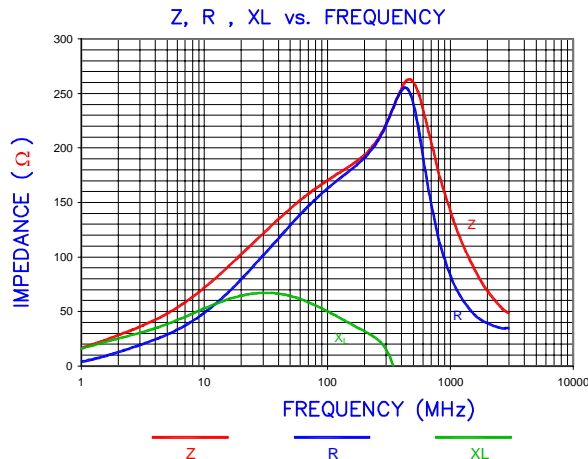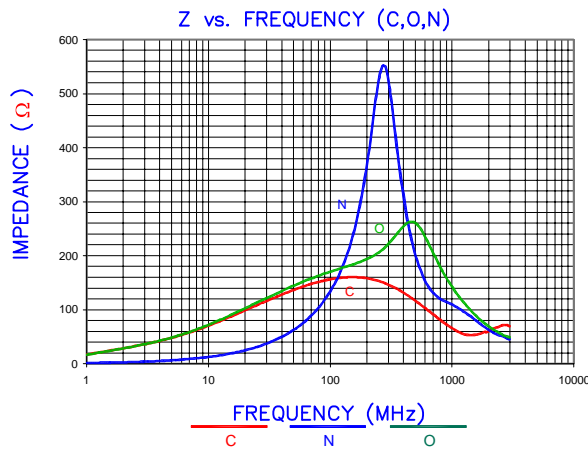

HOLE PATTERN FOR WAVE SOLDERING

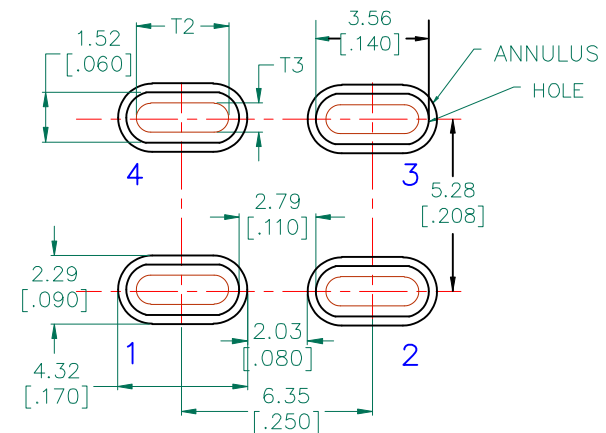

DIMENSIONS ARE mm IN [INCHES].				THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.			
				Steward			
				PROJECT/PART NUMBER: CM5441Z161B-10	REV: A	DRAWN BY: JRK	
DATE: 05/24/04		SCALE: NTS		MATERIAL:			
REV	DESCRIPTION	DATE	INT	CAD #	TOOL #	2 OF 3	
A	ORIGINAL DRAFT	05/24/04	JRK	CM5441Z161B-10-A	H0540-1		