




MALE END VIEW



- 1 = WHITE/ORANGE
- 2 = ORANGE
- 3 = WHITE/GREEN
- 4 = GREEN
- 5 = WHITE/BROWN
- 6 = BROWN
- 7 = WHITE/BLUE
- 8 = BLUE

SPECIFICATIONS

HOUSING MATERIAL	PA UL94-V0
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL	DIE-CAST ZINC
RATED CURRENT [A]	0.5 A
RATED VOLTAGE [V]	48 V
MAXIMUM WIRE SIZE	22 AWG
CABLE GRIP RANGE	5-9.7mm
TEMPERATURE RATING	-25°C to +85°C (-13°F to +185°F)
PROTECTION CLASS	IEC IP65, IP67
TRANSMISSION PERFORMANCE	CAT 6 _A PER IEC/PAS 61076-2-109

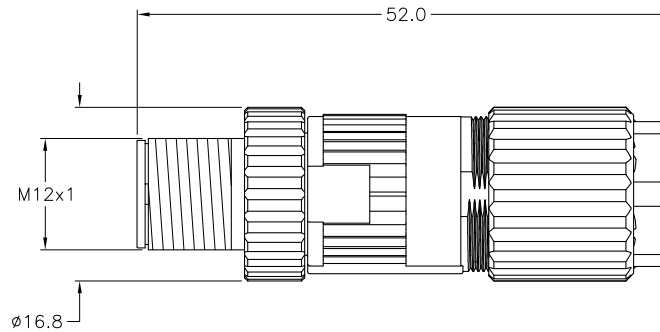

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- 1. SUITABLE FOR 10 GBIT AS PER IEEE 802.3an

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC <i>High Technology Sensors and Automation Controls</i> 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
	MATERIAL SEE SPECIFICATIONS	DRFT RDS APVD A.A.	DATE 09/07/11 SCALE 1=.8	DESCRIPTION CMB SX 8181-0	
FINISH SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT MILLIMETERS		IDENTIFICATION NO. U2-19270	REV B
B UPDATE GRAPHICS BASED ON CUSTOMER SUPPLIED MODEL	RDS	10/13/11	36815	DO NOT SCALE THIS DRAWING	
REV DESCRIPTION	BY	DATE	ECO NO.	FILE: U2-19270	SHEET 1 OF 1